



Tote Bag Pattern

Format : **A4**

P-009

MATERIALS AND FITTINGS NEEDED

Cowhide 4-6 oz leather : approx. **6 ft² (45x120 cm)**

Linen or other waxed thread : approx. **120 ft (40 m)**

Bottom stud: **4** (or Size 70mm bag feet: **2**)

Snap fastener: **2**

Decorative metal hardware (optional): **1**

INNER POCKET FITTINGS:

Size 5mm Zipper : **9" (22 cm)** – Size 5mm Zipper puller: **1**

Lining Cloth : approx. **1 ft² (25x40 cm)**

Thin Cardboard : approx. **1 ft² (25x40 cm)**



Dimensions: W:(b: 31.5 t: 40), H: 25 , D: 13.5 (cm)

<https://www.etsy.com/shop/PinePatterns>

 @Pine.Patterns

pine.pattern@gmail.com



ASSEMBLY INSTRUCTIONS

How to cut the parts from leather :

Please note that certain sections have been divided into smaller pieces to fit in A4 and letter paper sizes. These dividing lines are clearly marked with CAPITAL letters. When assembling the Pattern's parts, tape the pieces together side by side, ensuring they align without overlapping. After assembly, compare the patterns with the diagrams. All necessary pieces are included in the PDF, so proceed to cut them out from leather once.

• Steps for assembling the bag:







- First, sew piece #1 to piece #3 along line (a) and to piece #4 along line (b). In these seams, the flesh sides of the two pieces face each other.
- Sew piece #2 to pieces #10 and #11 in the same manner.
- Now sew piece #6 to the bottom of pieces #1, #3, and #4 along line (m) so that the edge of piece #6 overlaps the edge of these three pieces.
- Sew the other side of piece #6 along line (w) to the bottom of pieces #2, #10, and #11 as before.
- Attach the bag feet (or bottom studs) to piece #6.
- Sew piece #7 onto piece #2 at section (k). If the leather is thin or skived, you can double piece #7.
- Sew the front and back panels of the bag together via lines (e) and (s) so that the front panel overlaps the edge of the back panel.
- Now sew the bag corners marked with letters (z) and (p) facing outwards.
- Attach the male side of the snap fasteners to the first cut of piece #8 and the female side to the second cut of piece #8, but pay attention to the placement of the buttons for this task. This is because the male parts of the buttons must be on the flesh side and the female parts must be on the skin side, so that when you fasten them together as shown in the picture, the two straps sit on top of each other.



- **Steps for assembling the bag:**


- Now sew piece #8 at section (t), then fold the continuation of piece #8 at the designated section and sew it to its back, inside the bag.
- Glue two cuts of piece #5 back-to-back, sew their ends to both sides of section (c) of pieces #1 and #4, and sew the other end to the opposite side of the bag, i.e., section (h).
- Repeat these steps for the other two cuts of piece #5 and sew the back handle of the bag.
- Sew all around the bag opening.
- Attach a piece of zipper to the middle slit of piece #9.
- Glue two pieces of cardboard on both sides of the zipper behind piece #9 so the pocket has good structure, then glue a layer of lining on top of it and sew the zipper.
- Fold piece #9 in the middle and sew all around its edge. This pocket is placed independently inside the bag and is not sewn anywhere.


DIAGRAMS

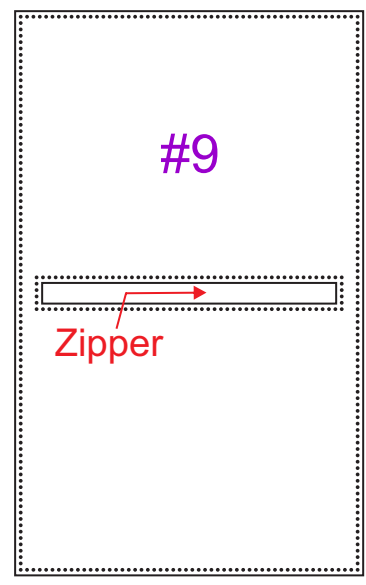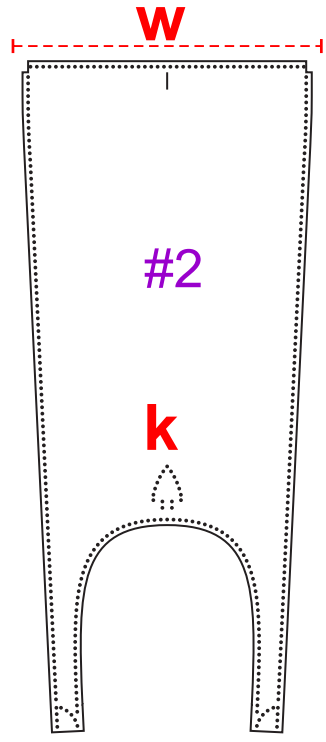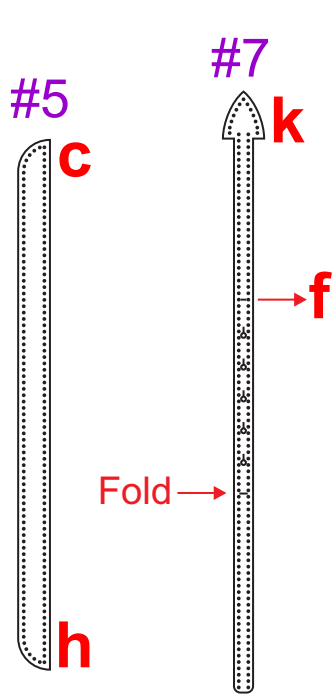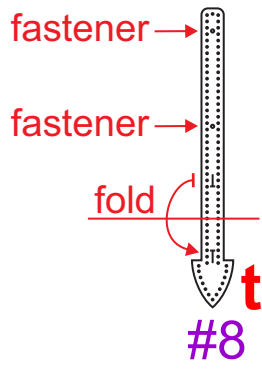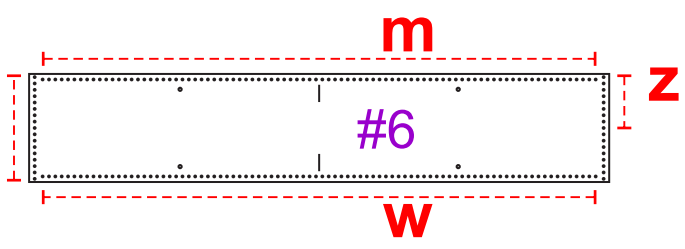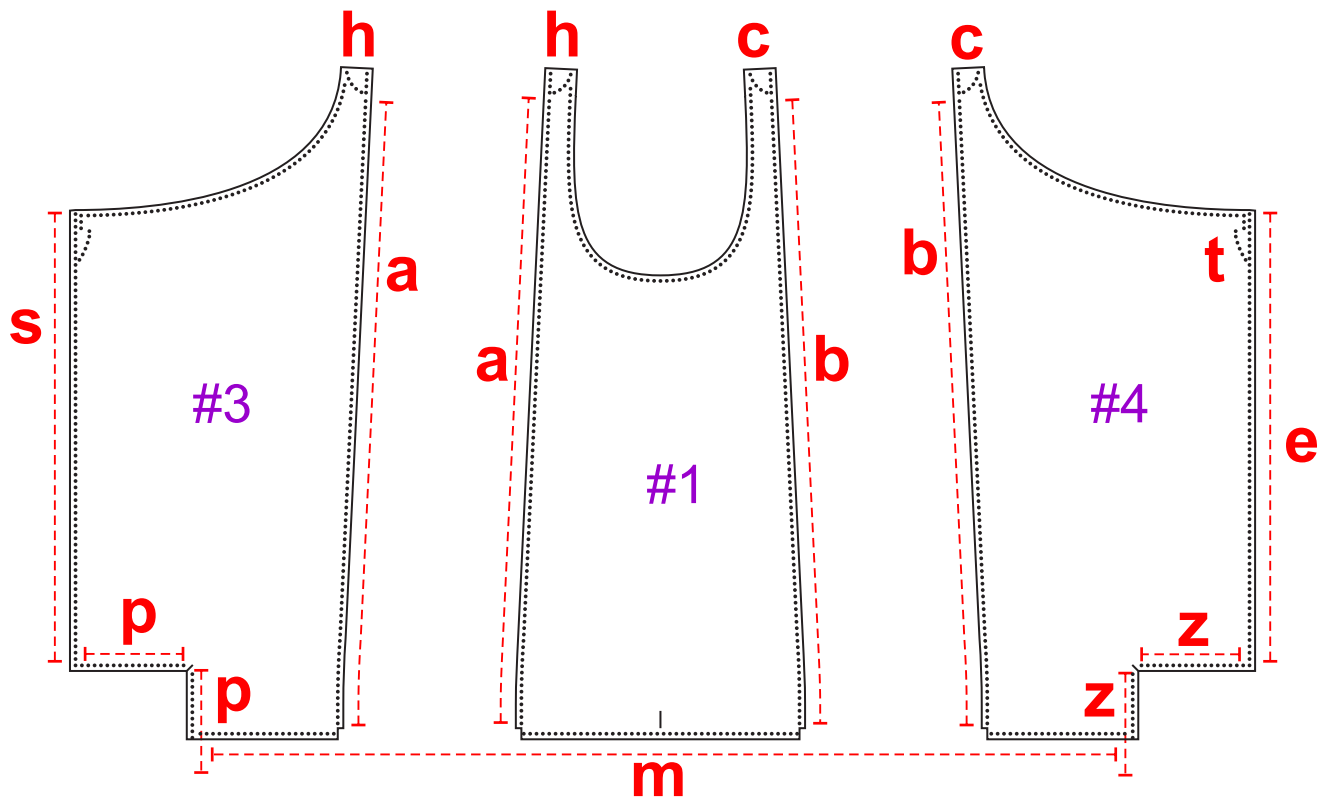



PHOTOS




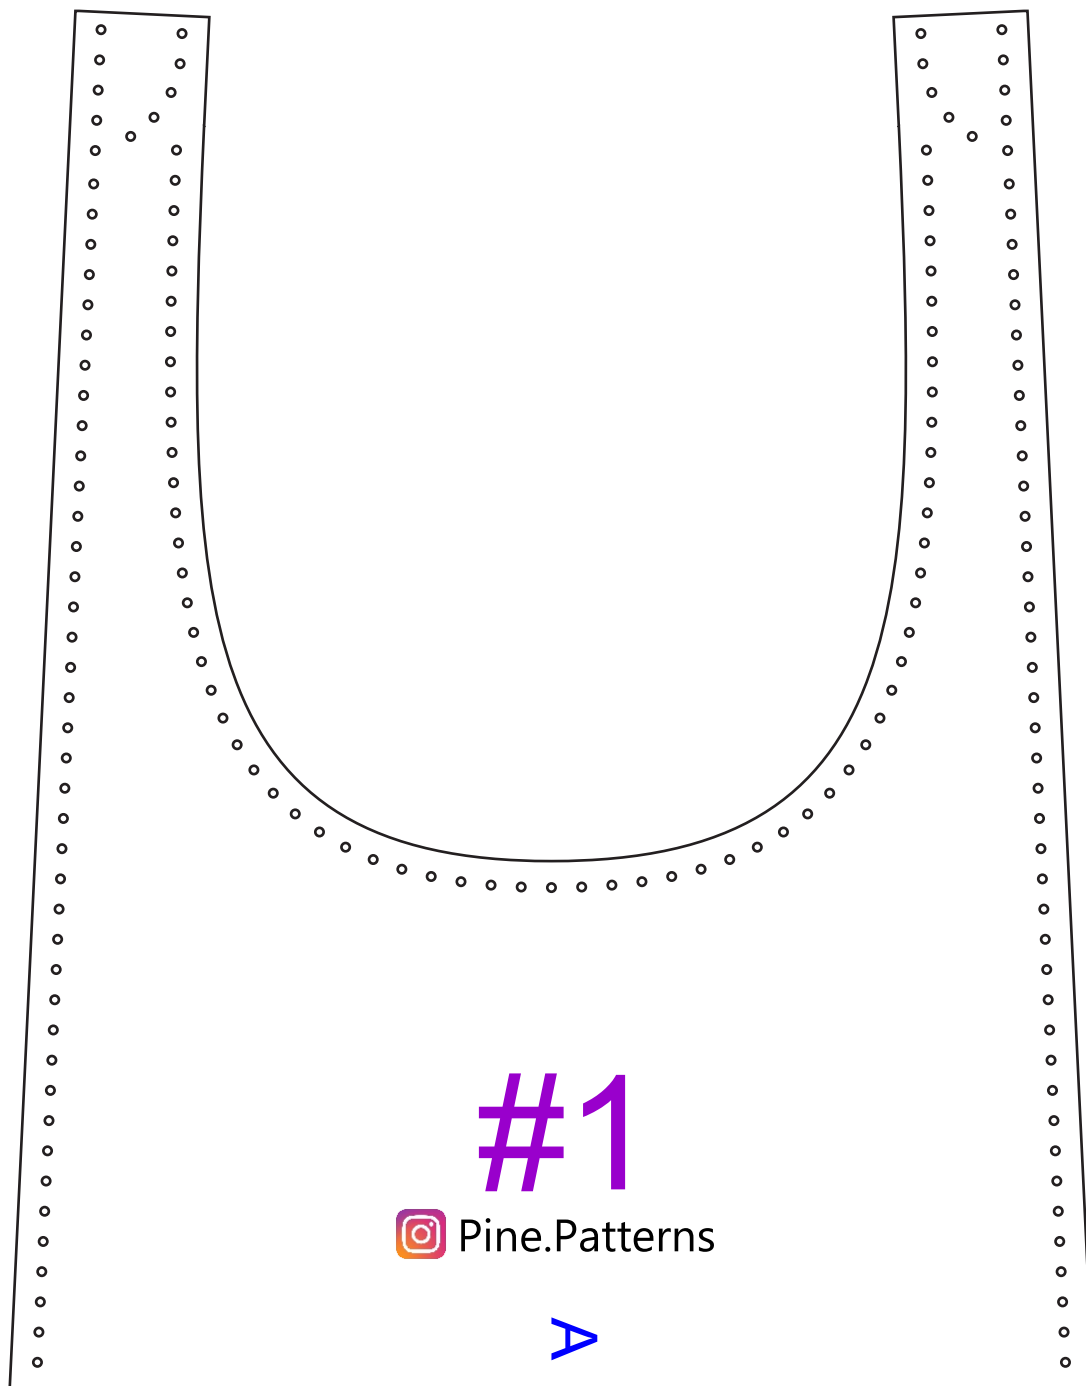


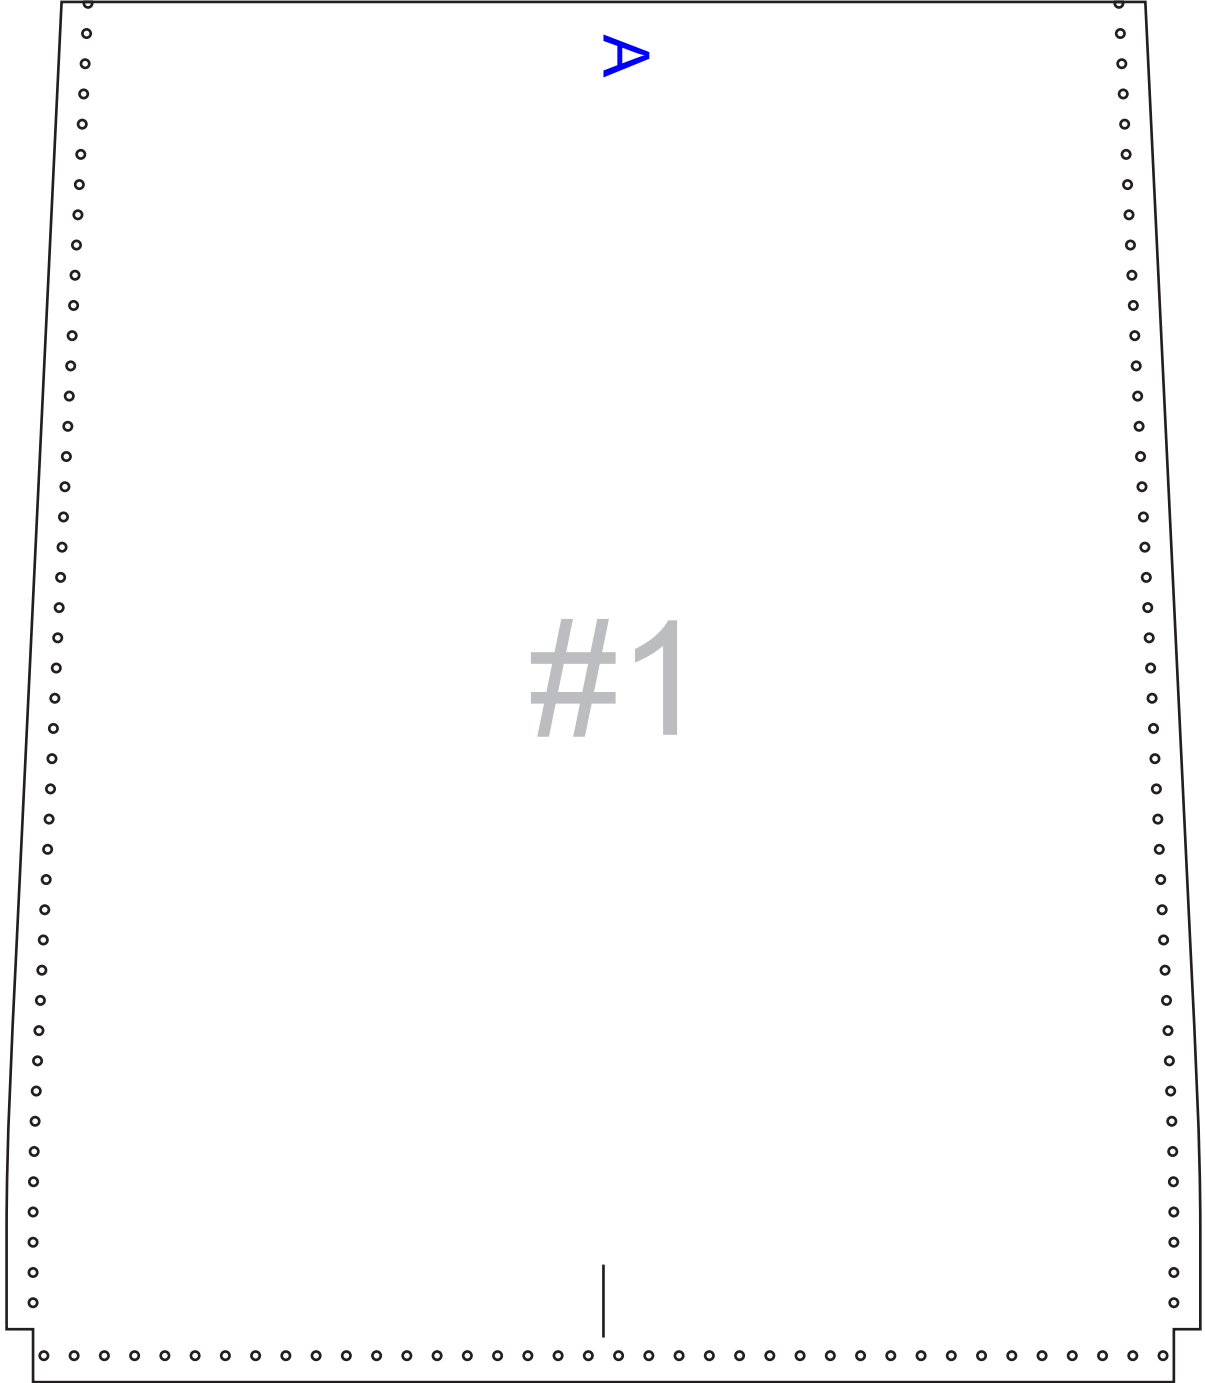


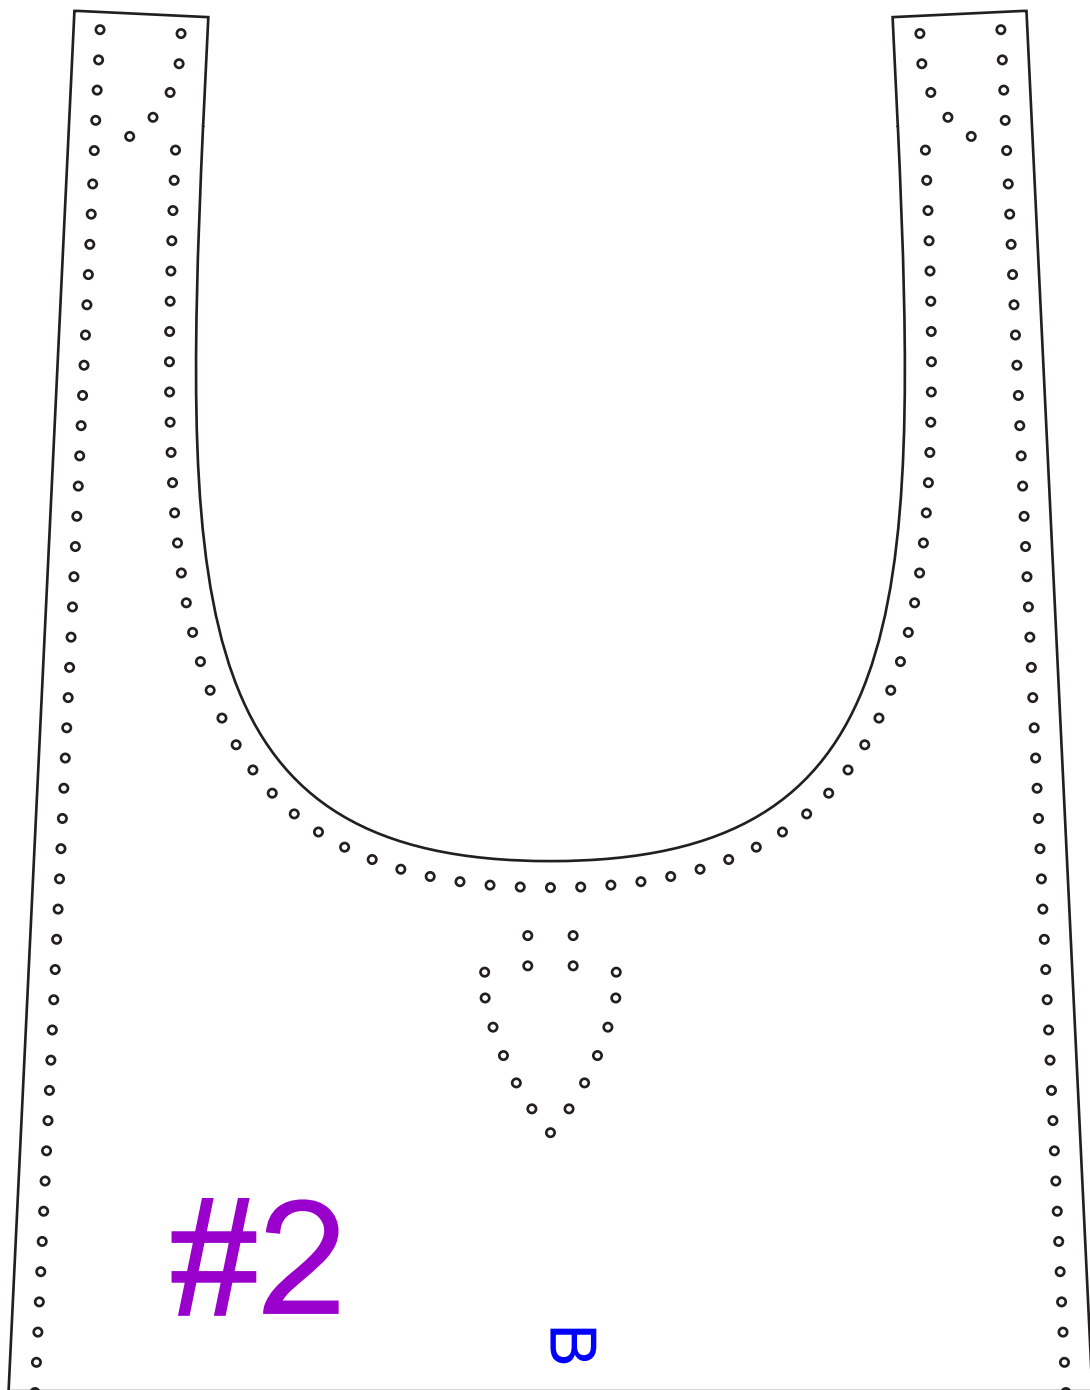


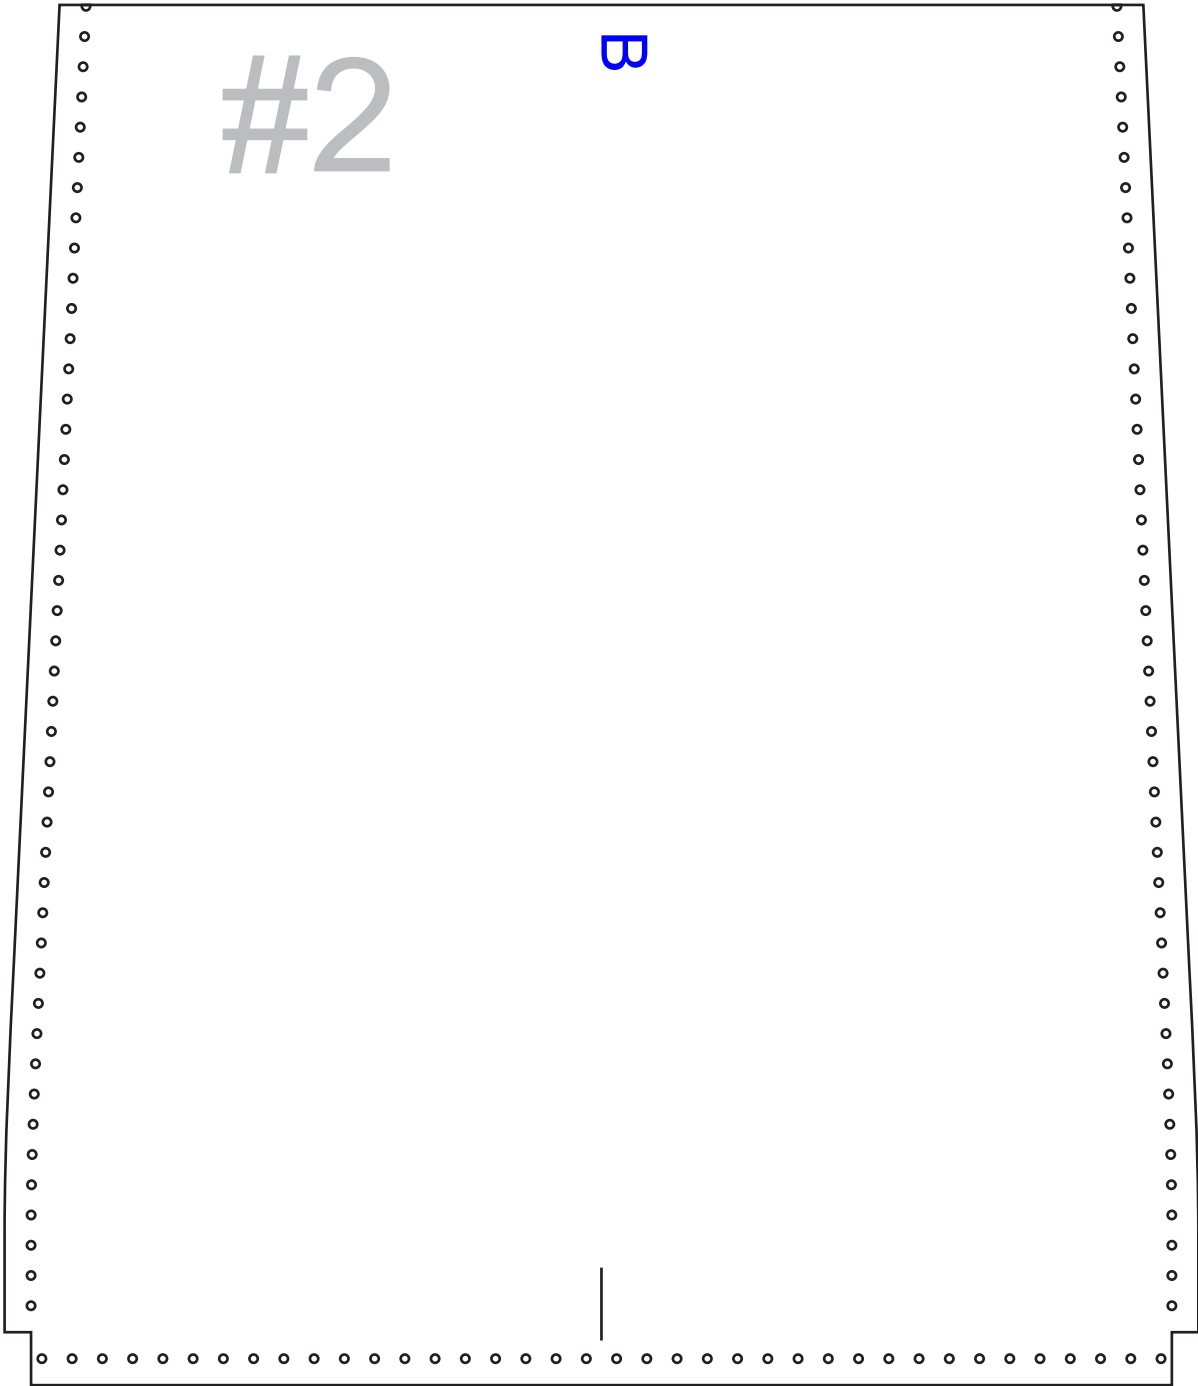

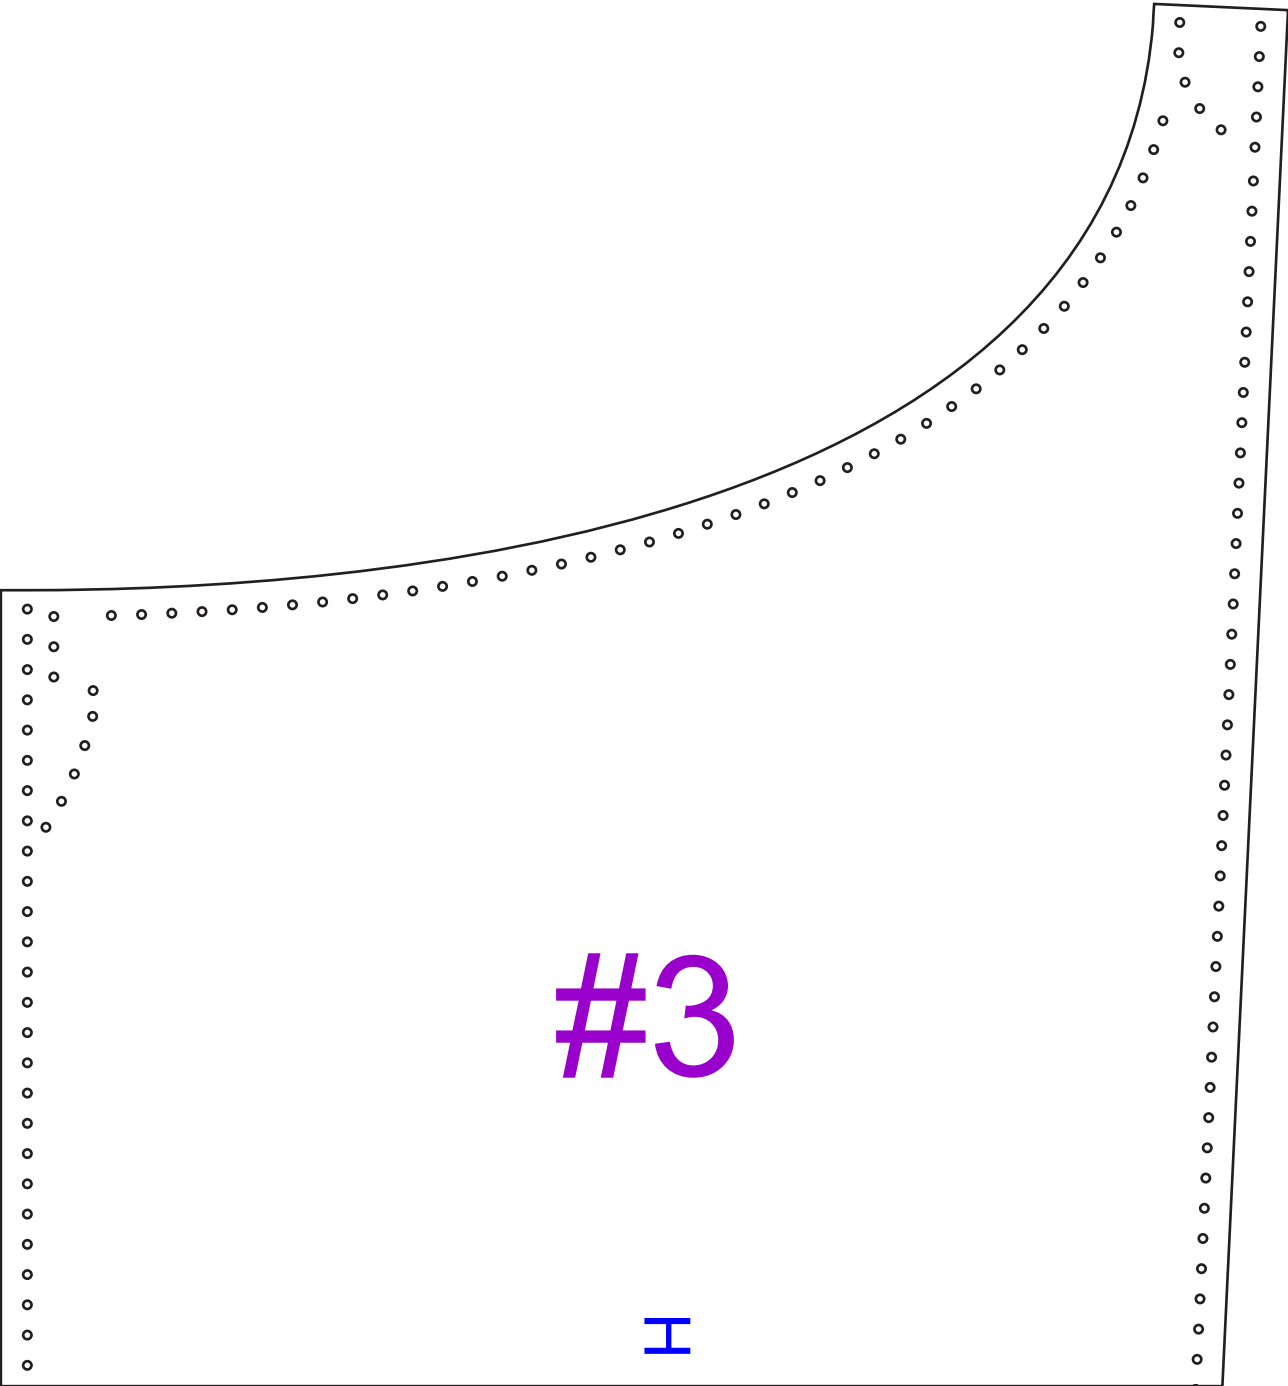


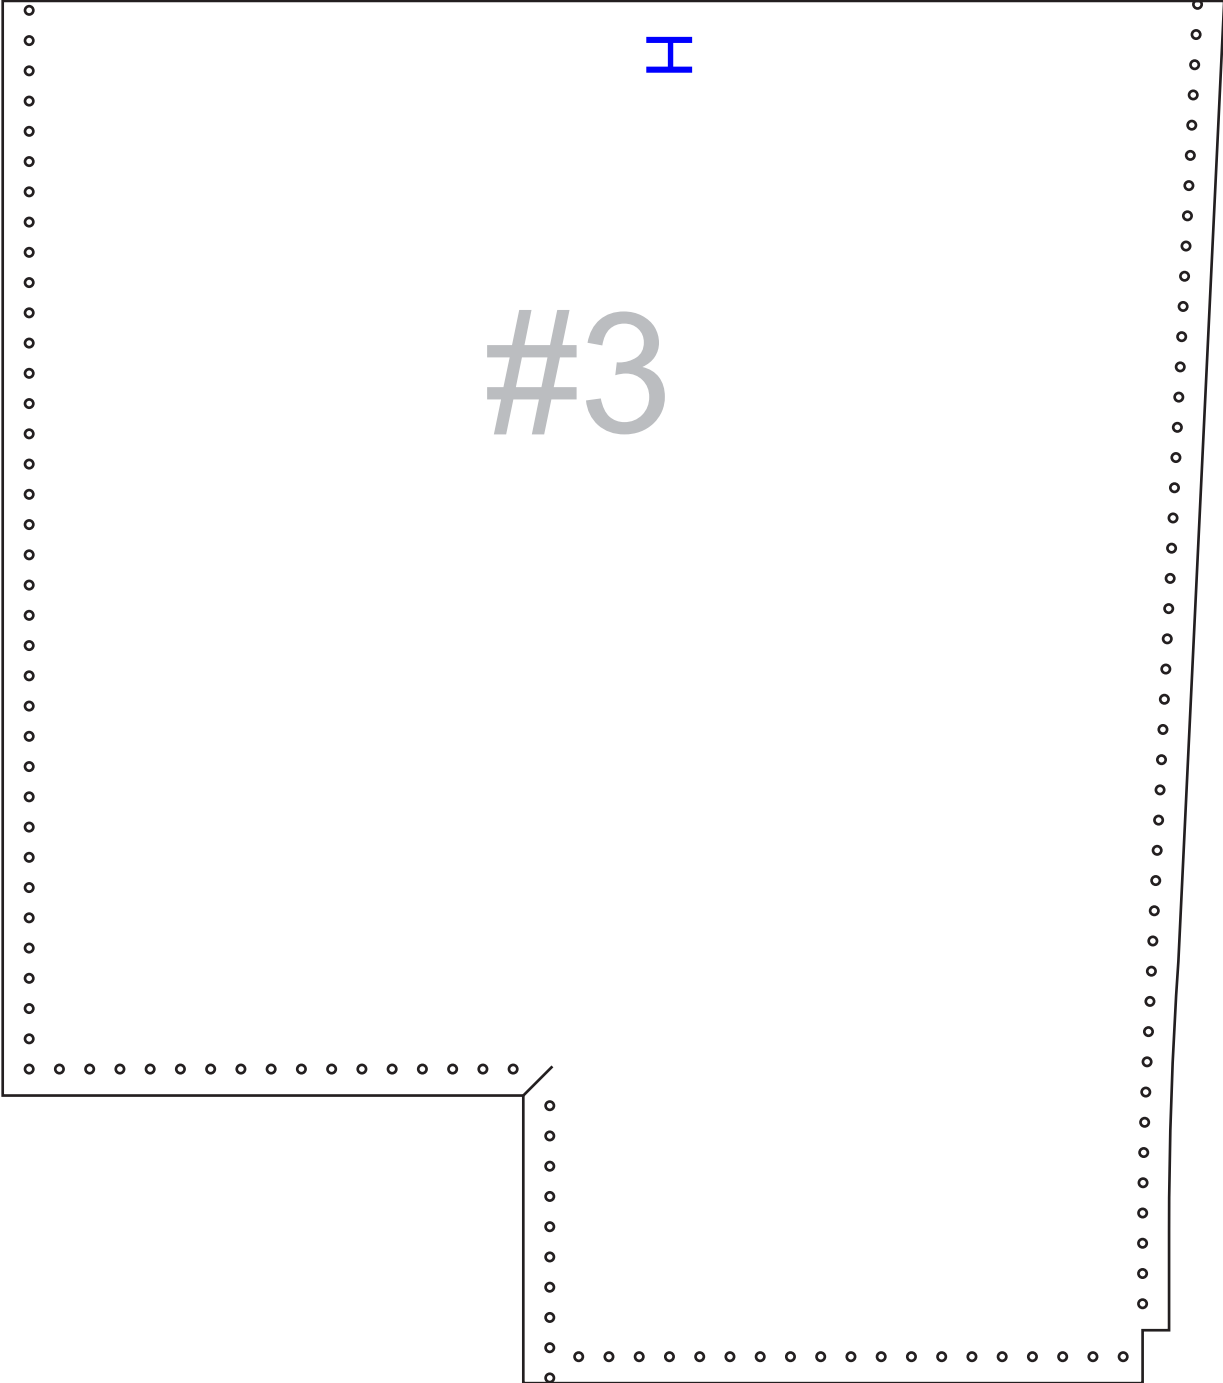


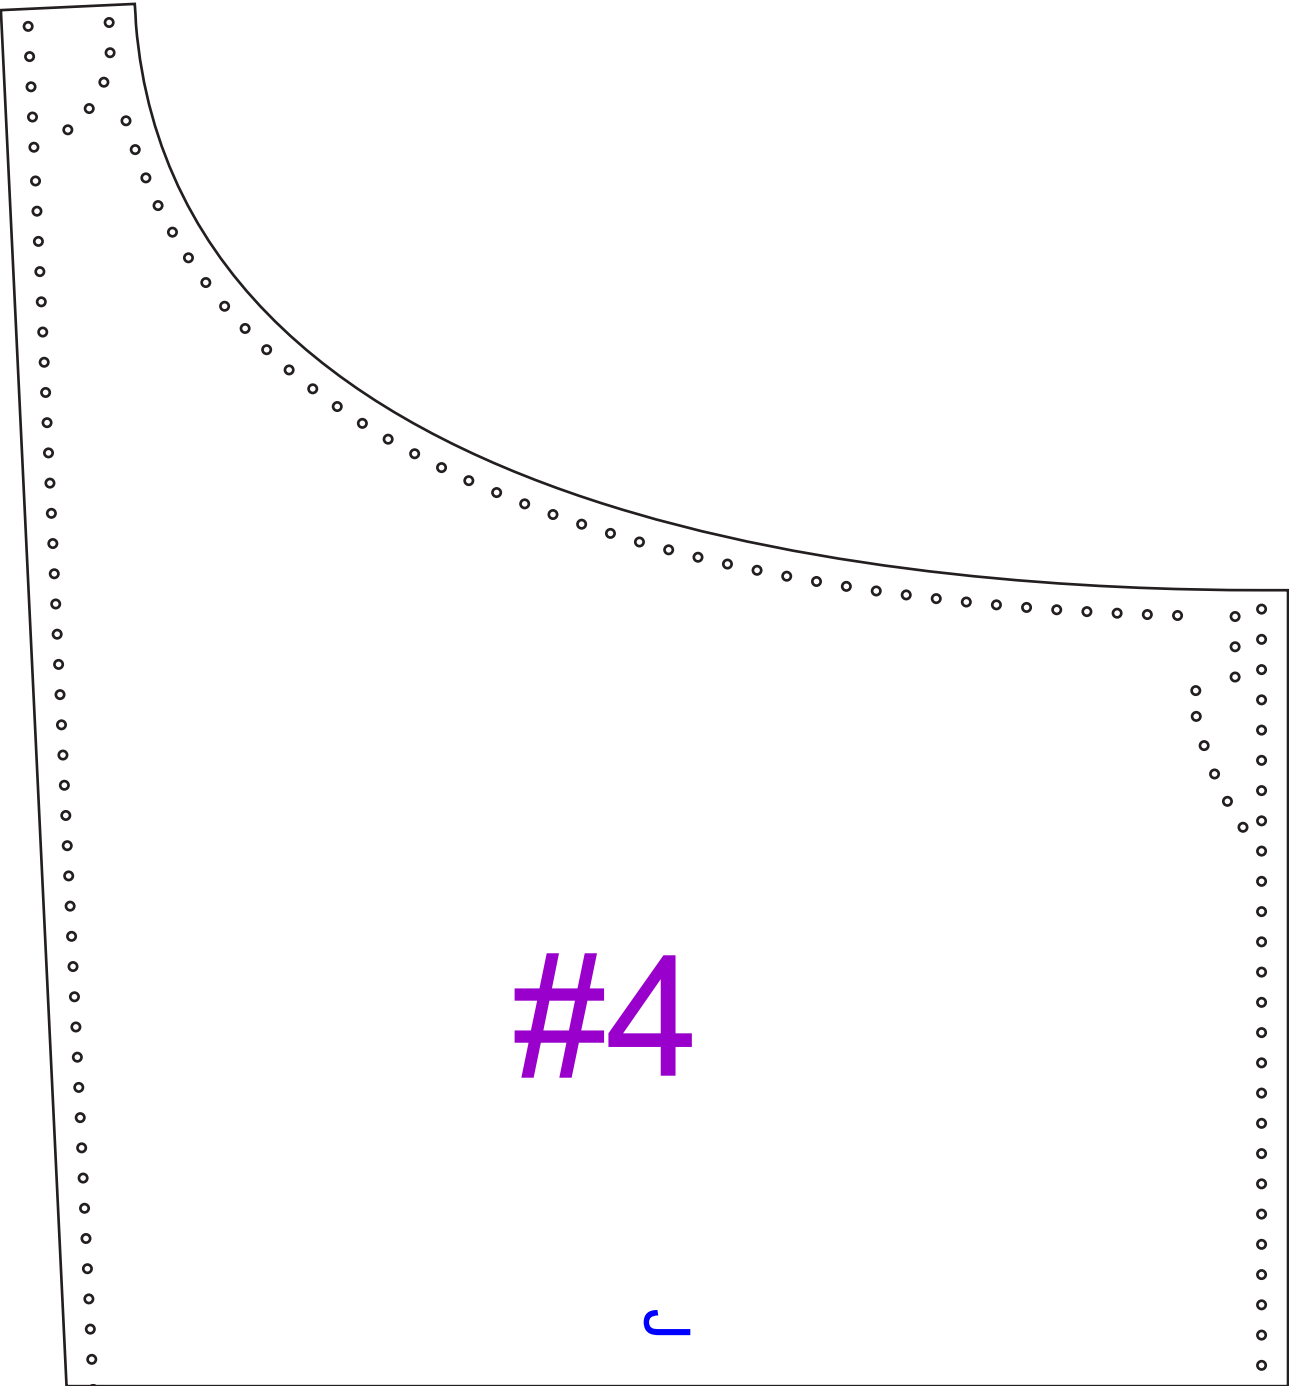


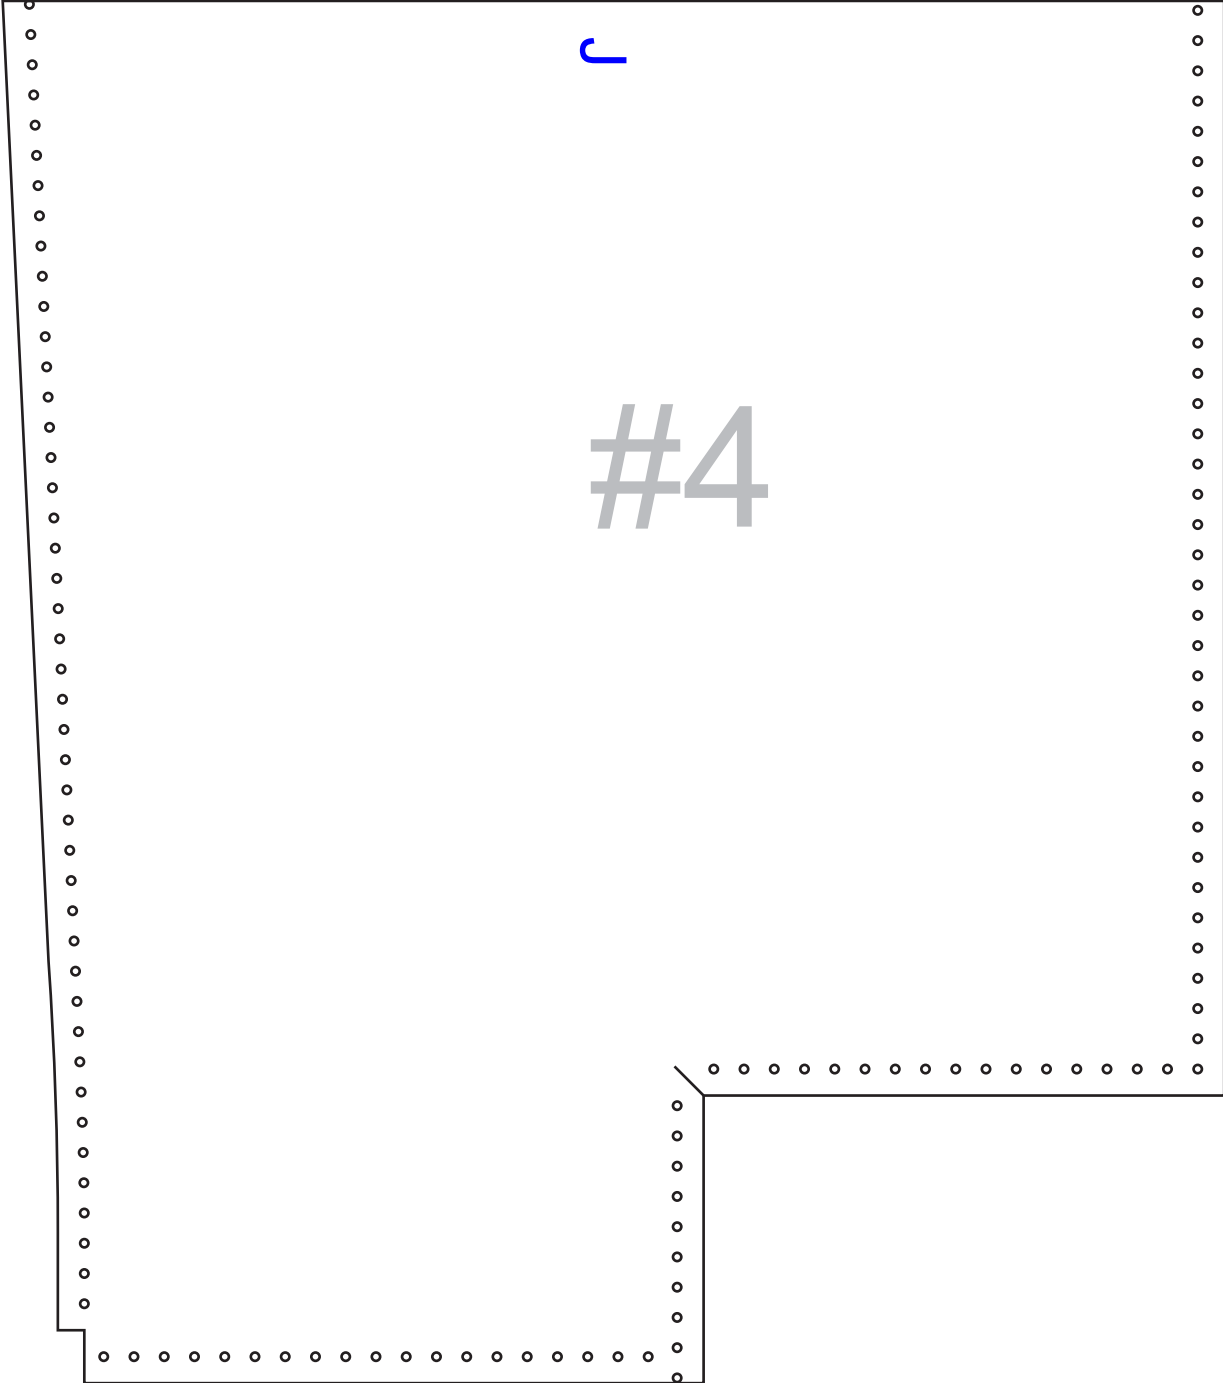


r

#4

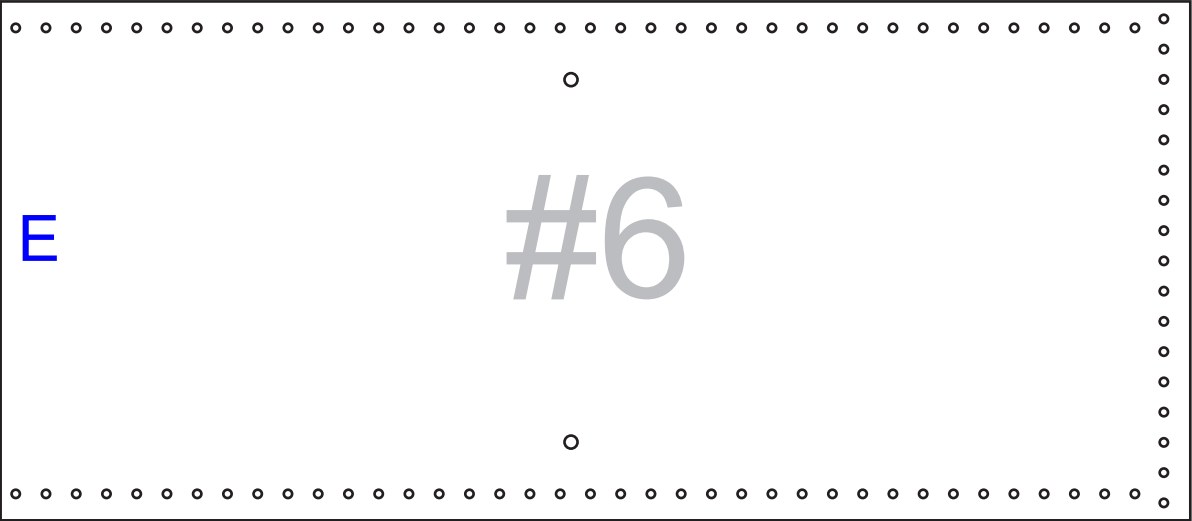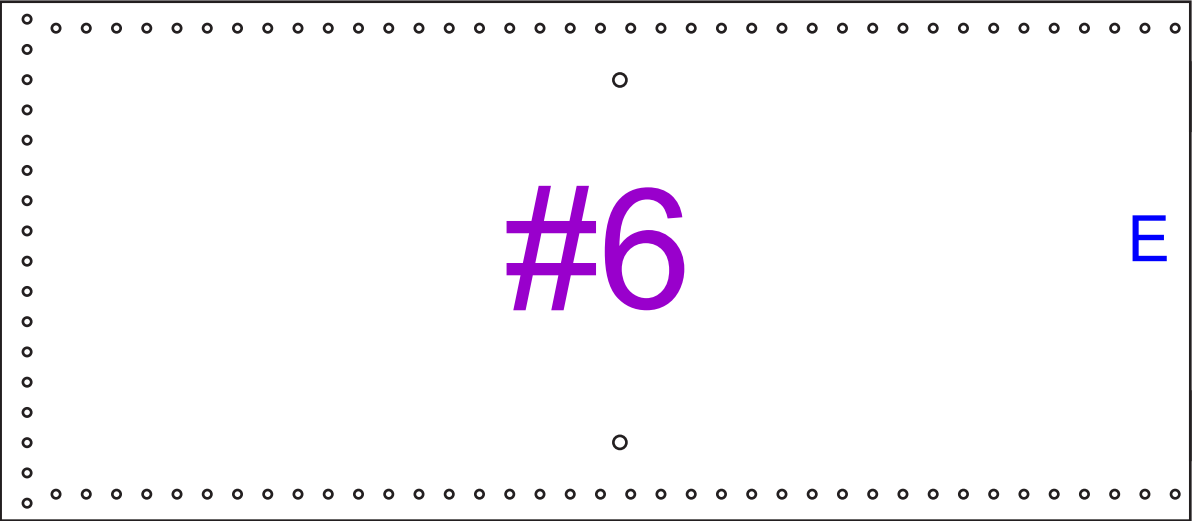

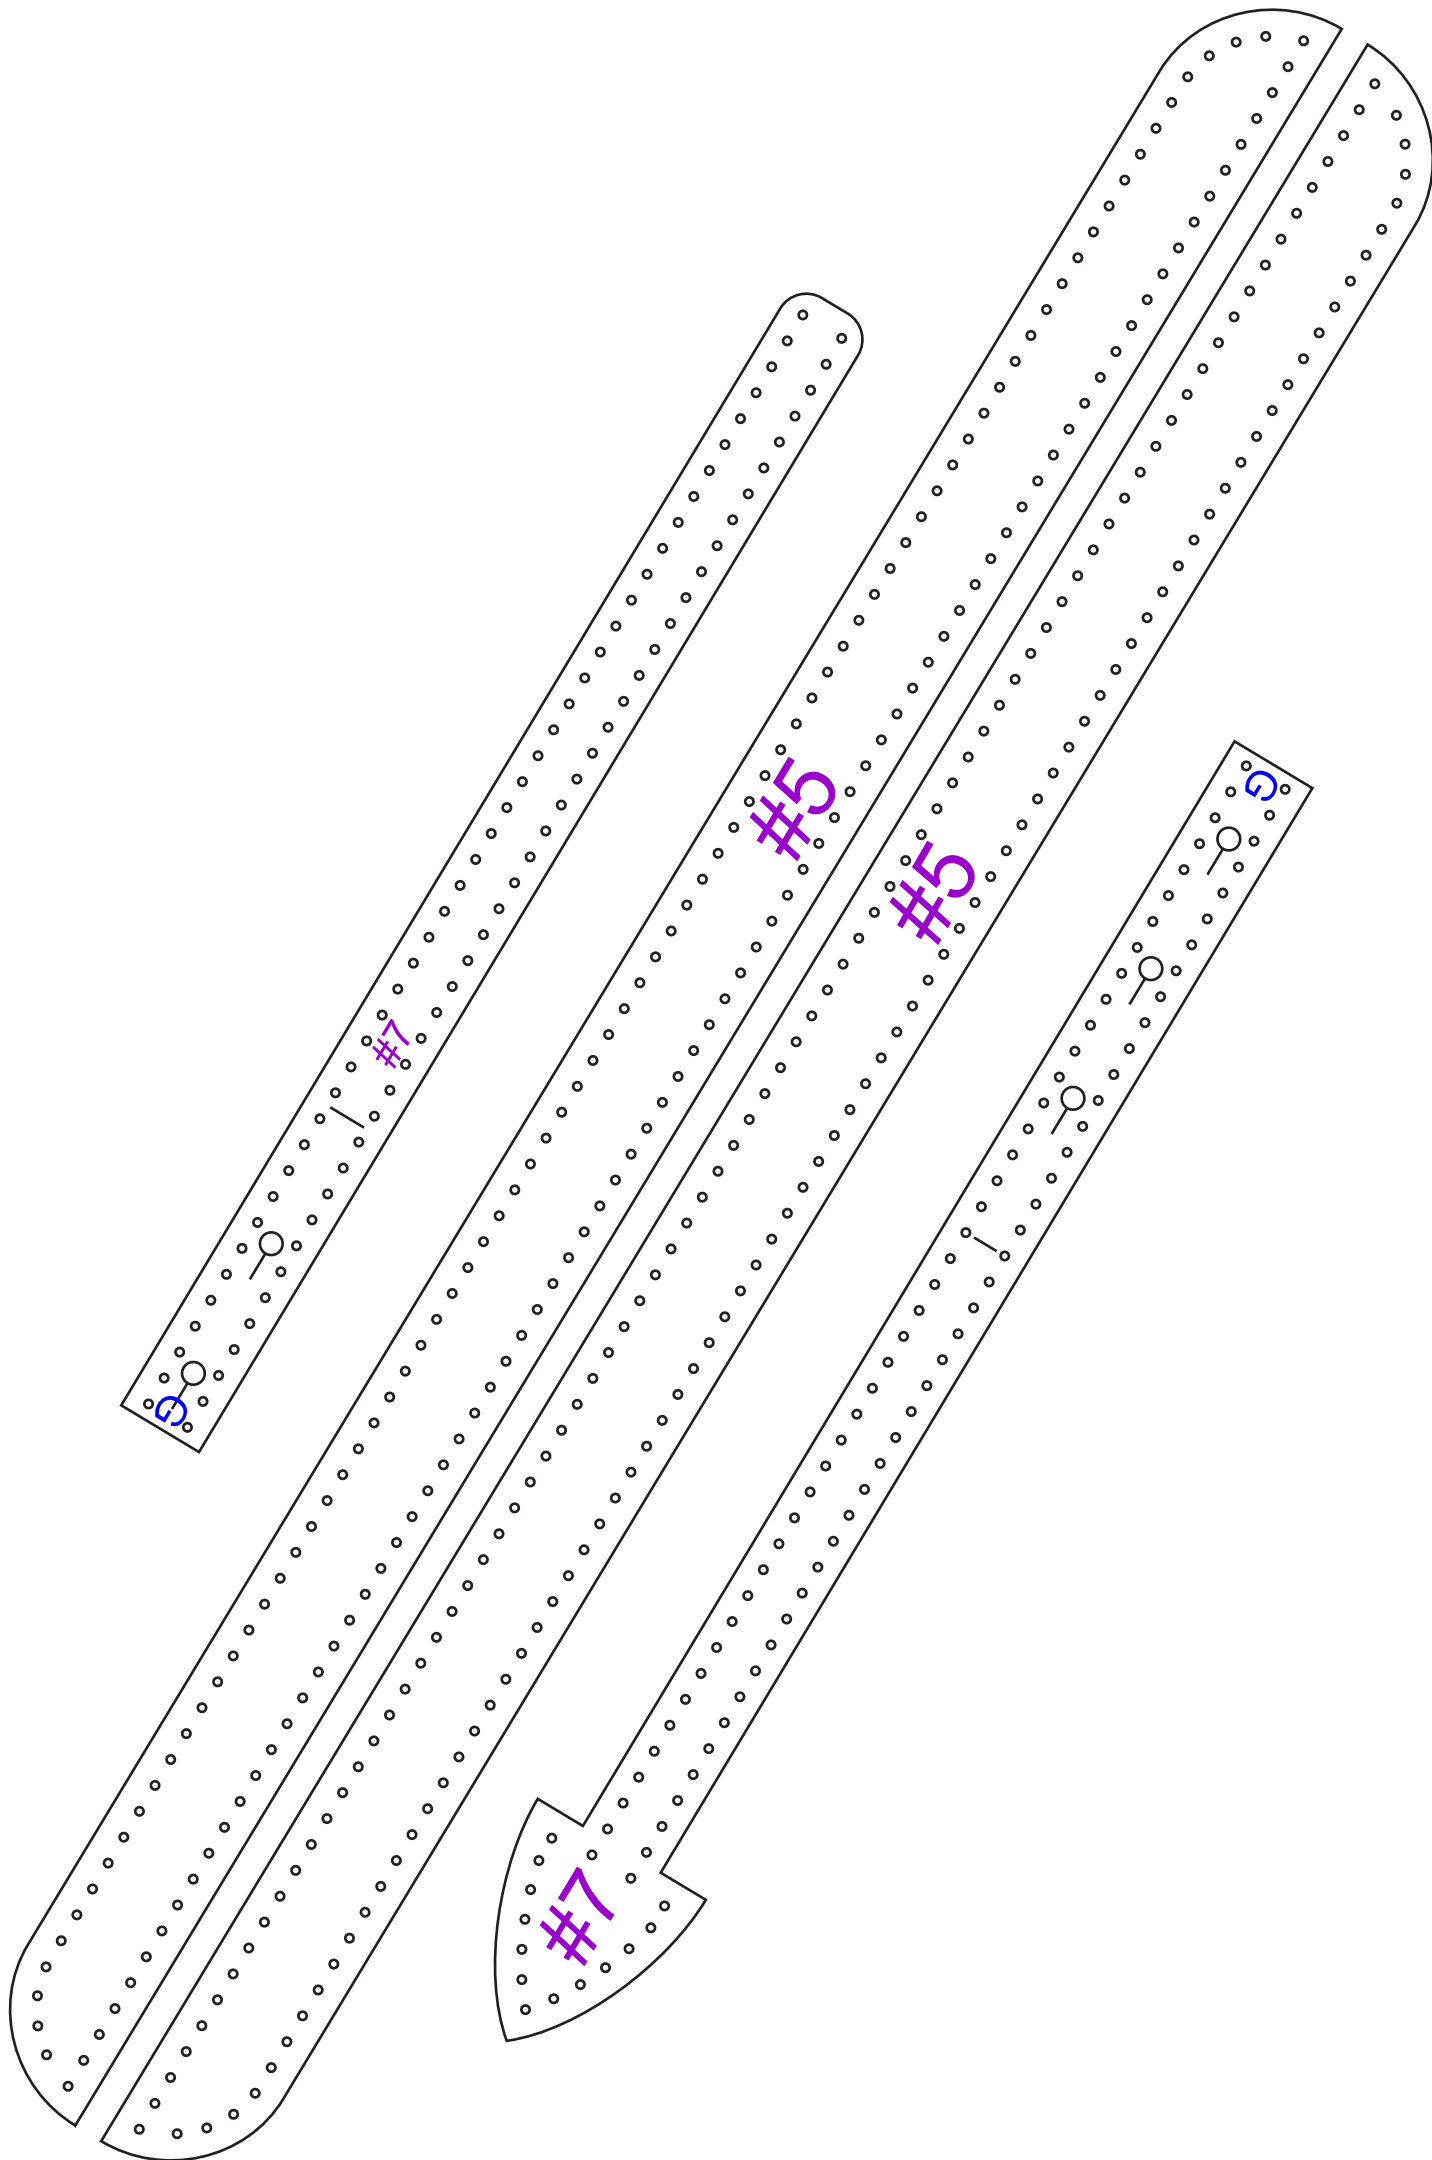

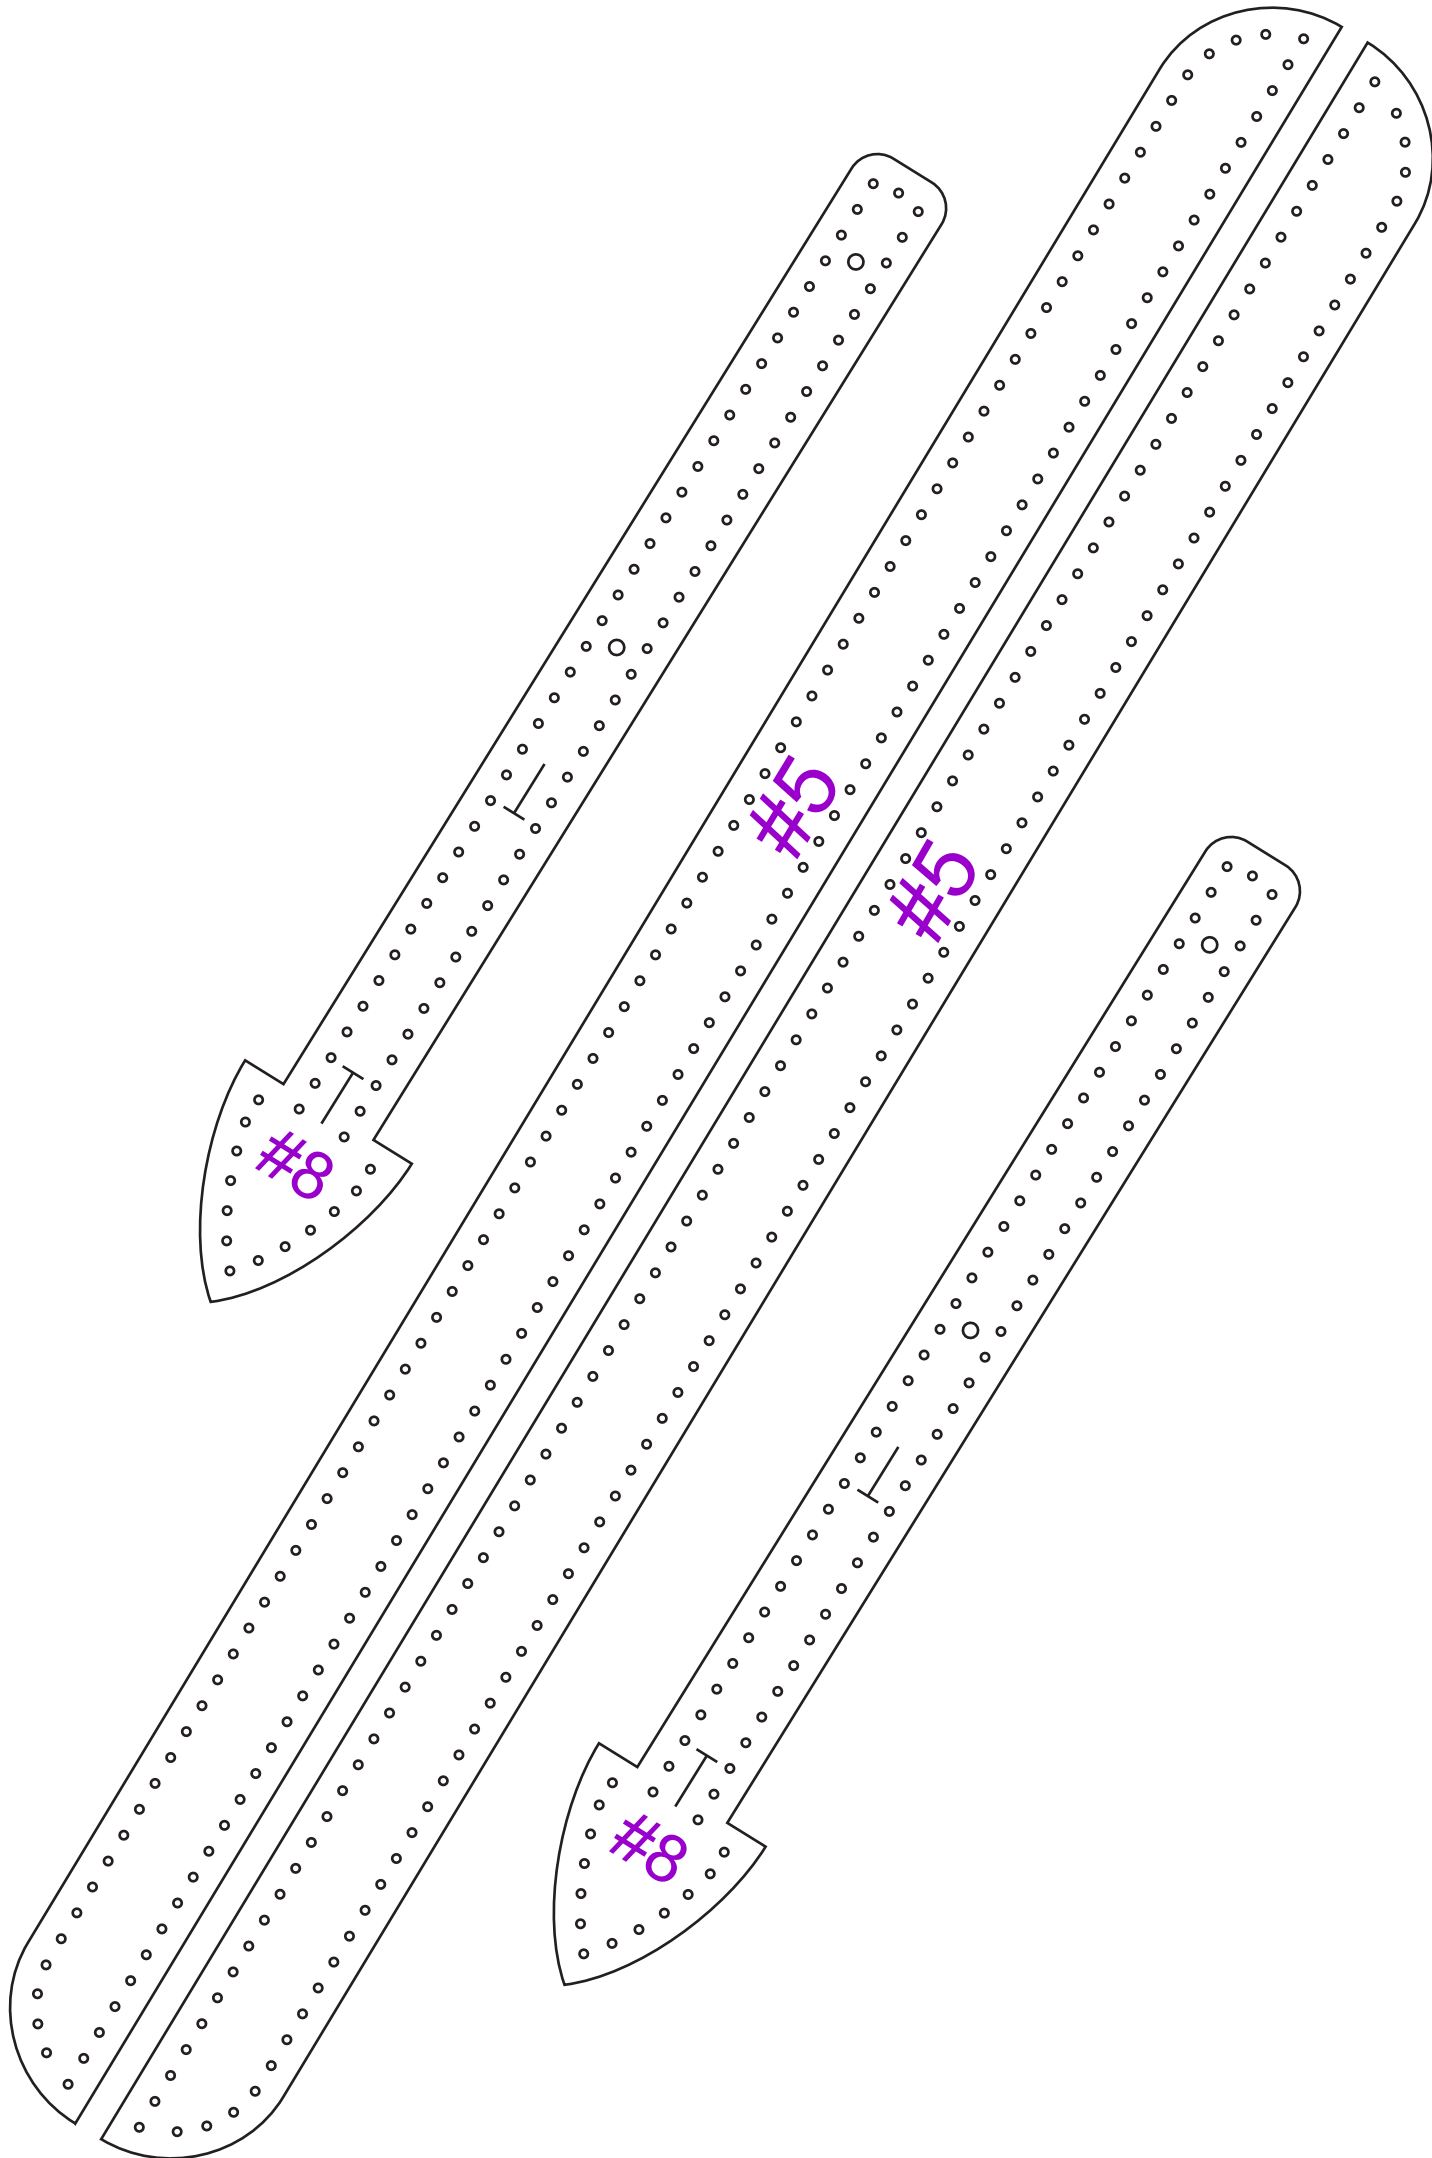

G

#9

H

G

9#

H

