


Note: Leather recommended thickness: 2.0mm

Attractive

Cutting & guleing with PAGE B

2cm

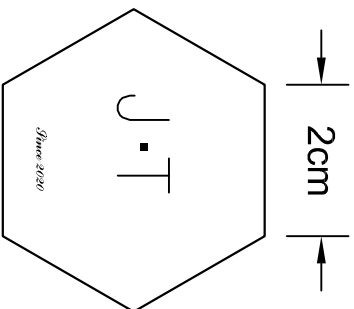


TEST: Print to A4 at 100% scale, make sure the length of a side measures 2cm.

JT-TTB-C Cover x 1
A01


Cutting & guleing with PAGE C

2cm



Guleing
with PAGE A

2cm




TEST: Print to A4 at
100% scale, make sure
the length of a side
measures 2cm.

Attractive

PAGE B


Note: Leather recommended thickness: 2.0mm

cm



Cutting & guleing with PAGE D

Note: Leather recommended thickness: 2.0mm

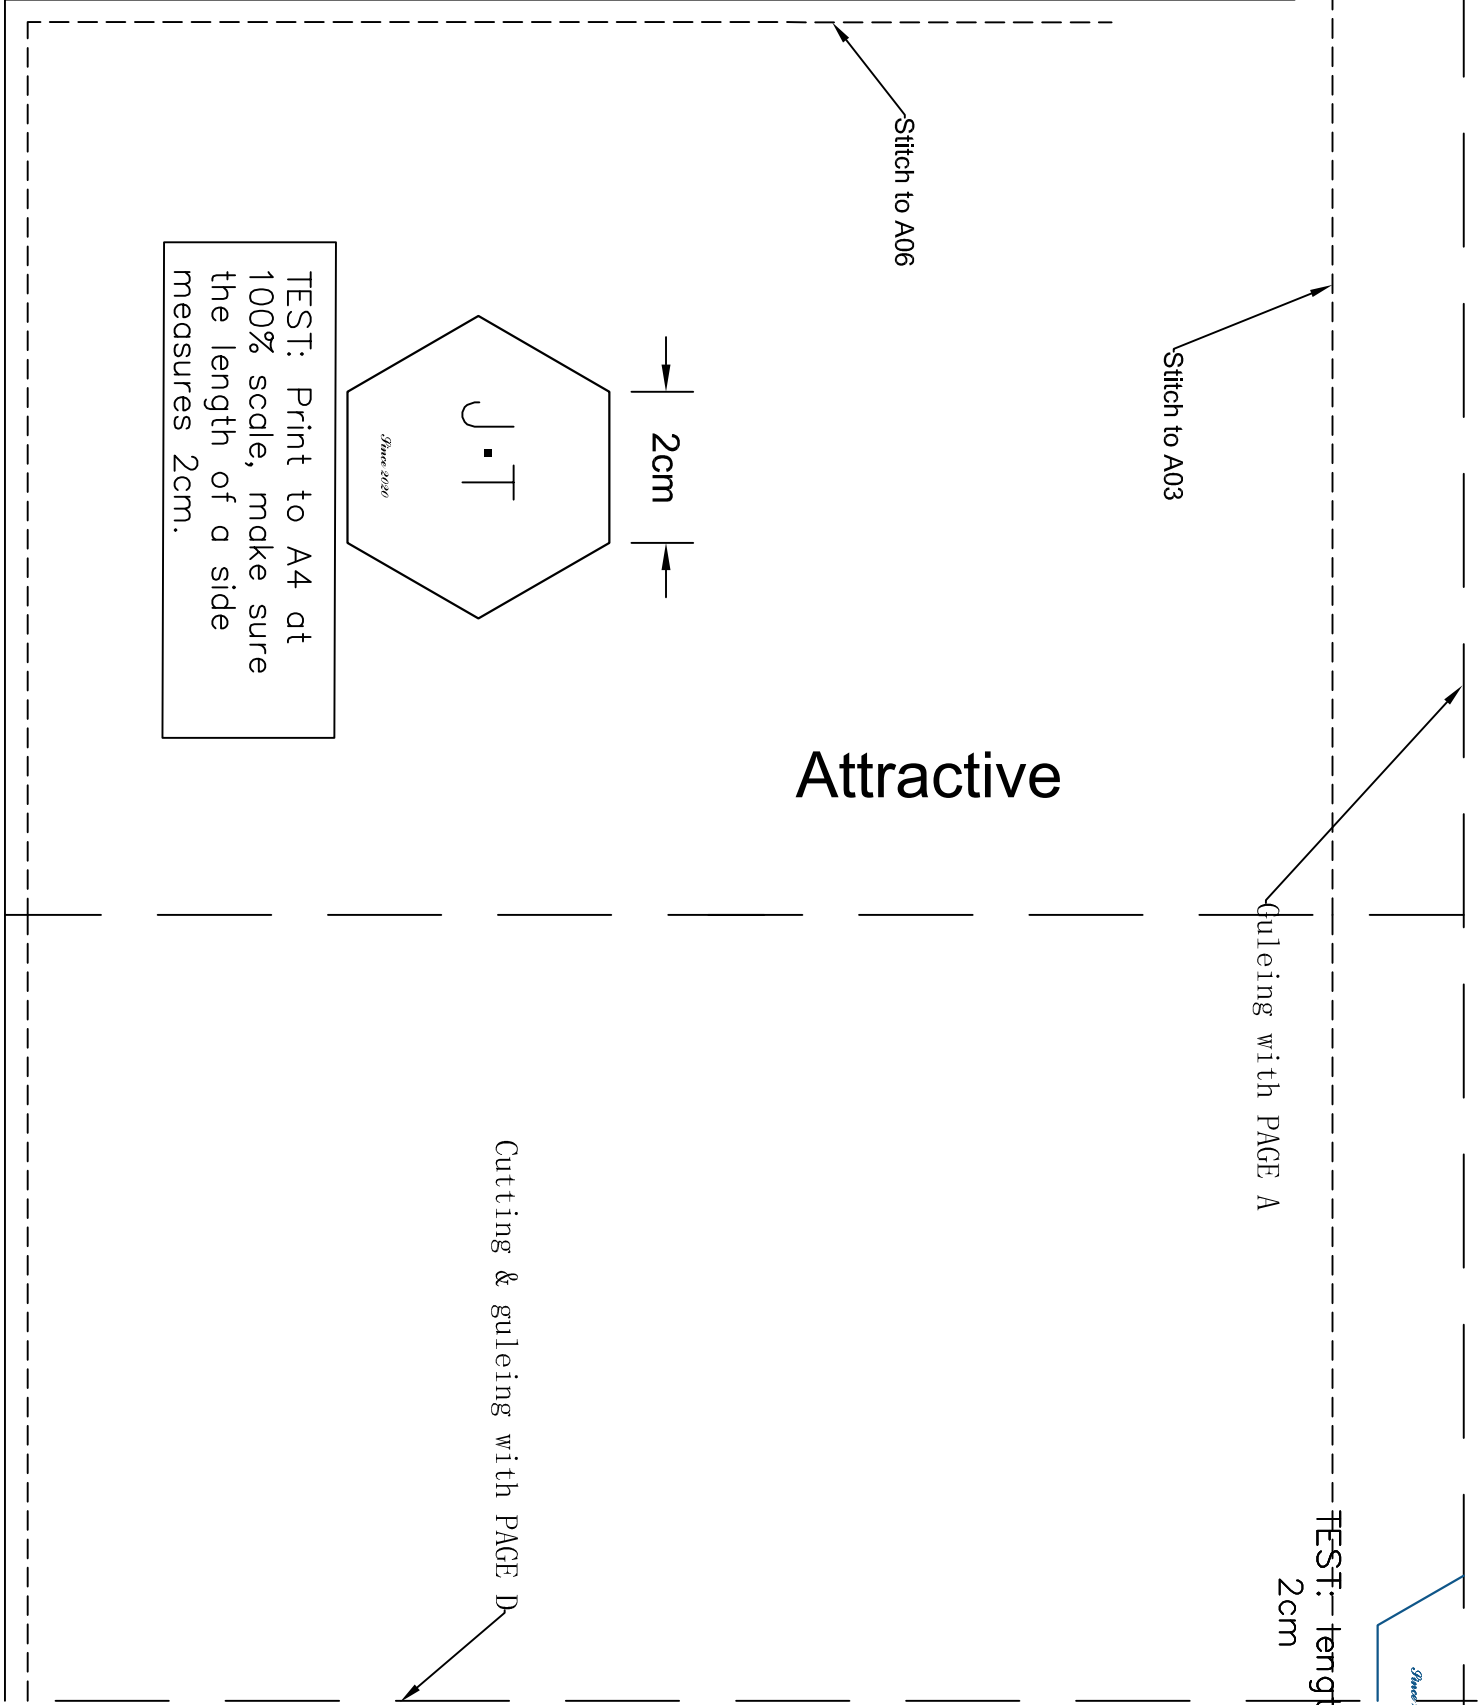


1/4th of a side

Guleing with PAGE B

PAGE D


Note: Leather recommended thickness: 2.0mm

Attractive
JT-TTB-C Side leather x 2
A02

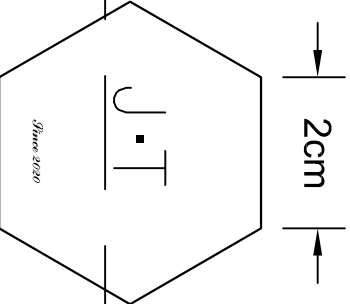

TEST: Print to A4 at 100% scale, make sure the length of a side measures 2cm.


Guleing with PAGE C

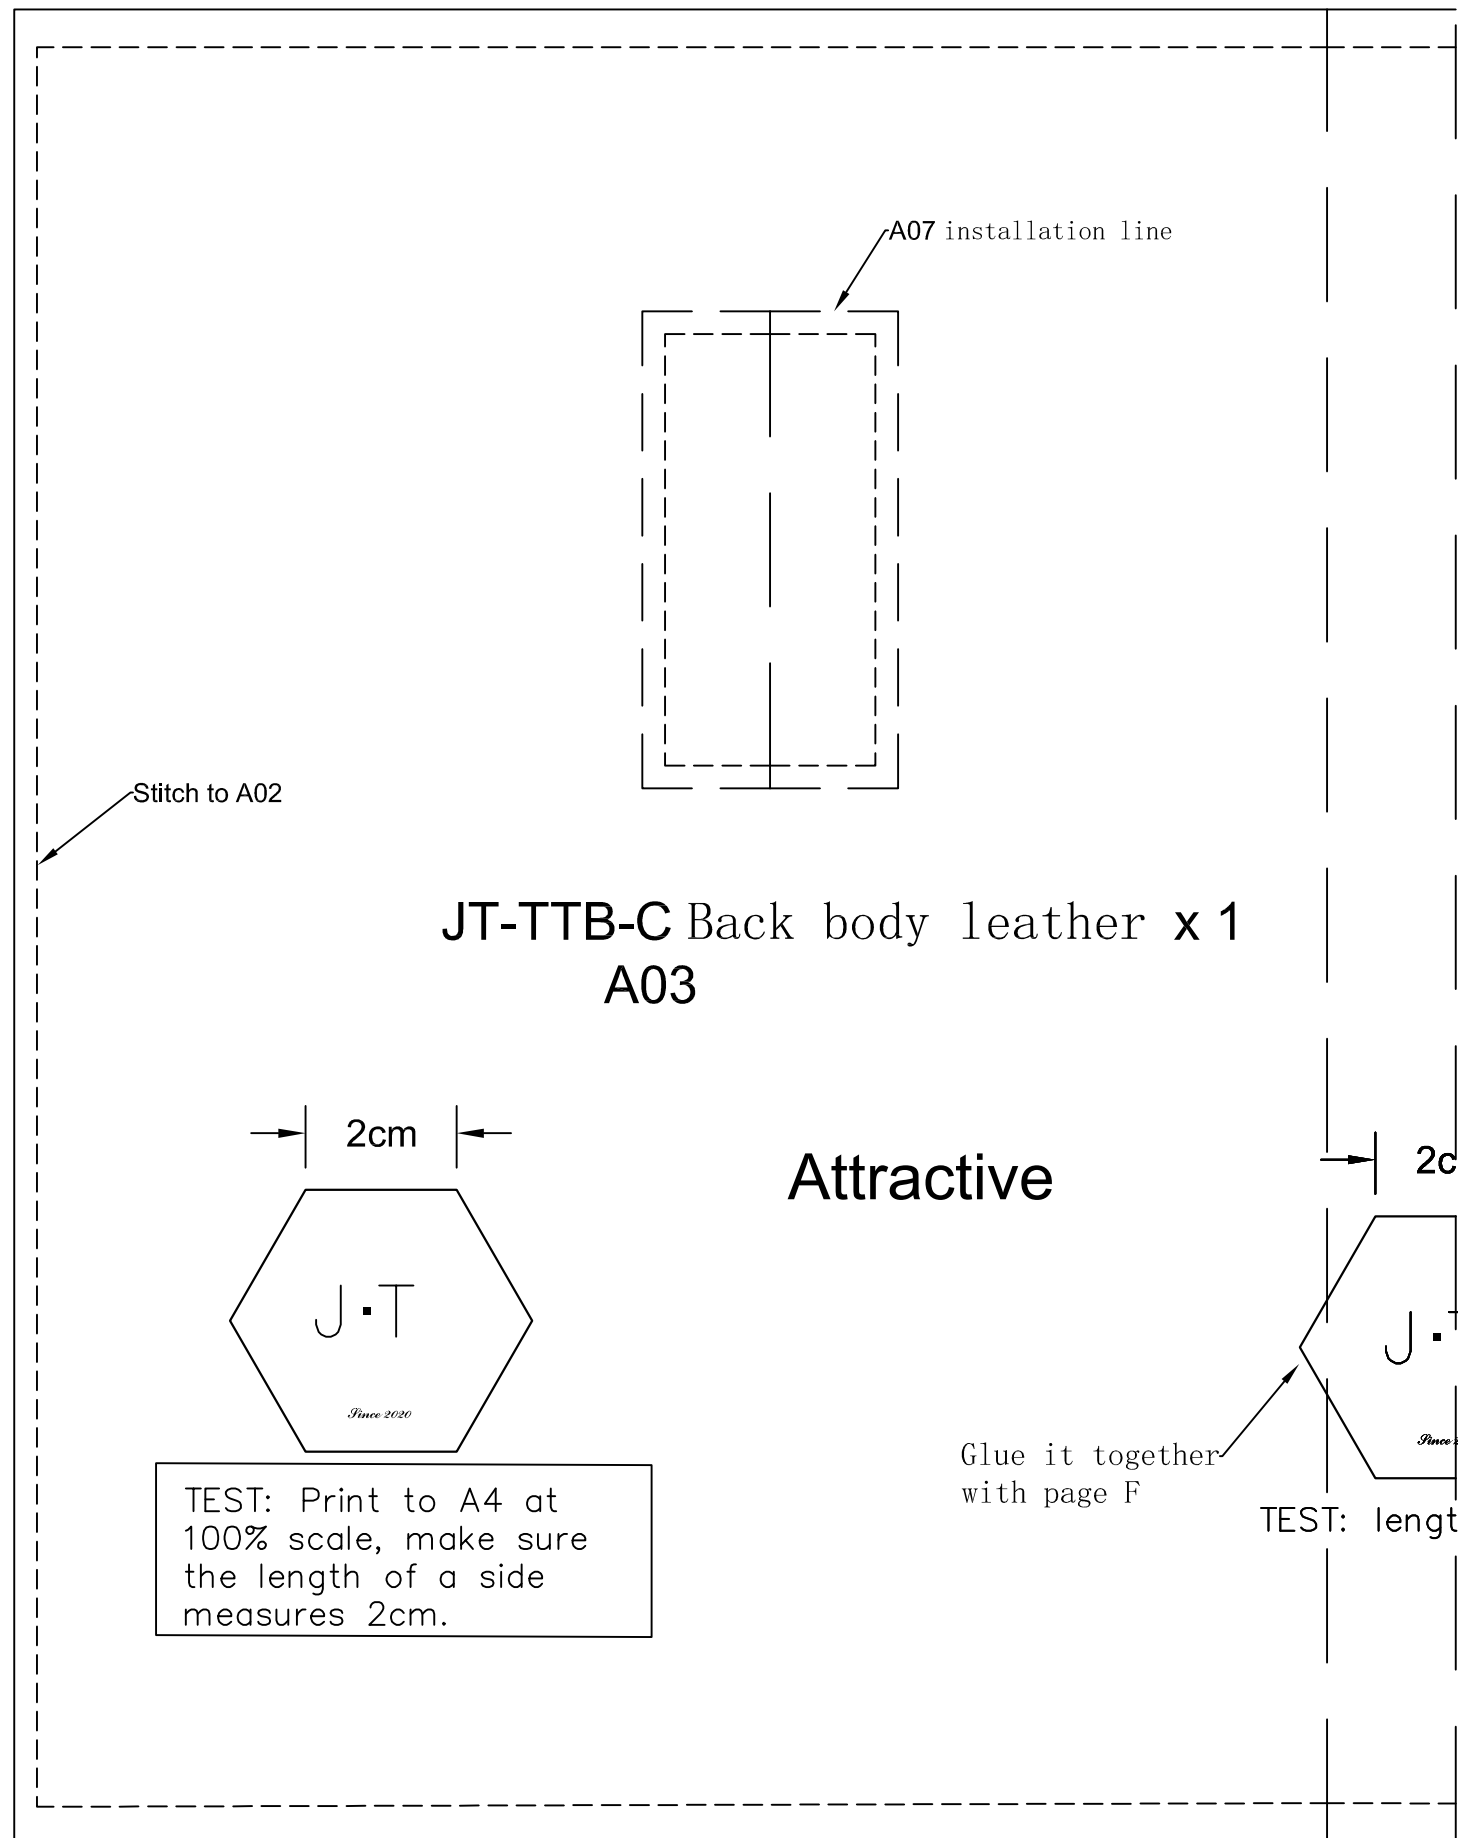

PAGE E

Note: Leather recommended thickness: 2.0mm


Cutting & guleing with PAGE F

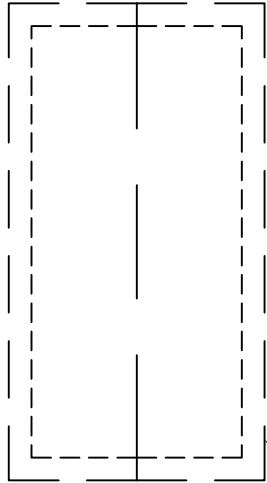

A07 installation line


cm

Glue it together
with page E



th of a side

→ 2cm ← **Attractive**




TEST: Print to A4 at
100% scale, make sure
the length of a side
measures 2cm.

Note: Leather recommended thickness: 2.0mm

PAGE F


Glueing with PAGE E

JT-TTB-C Front body leather x 1 A04

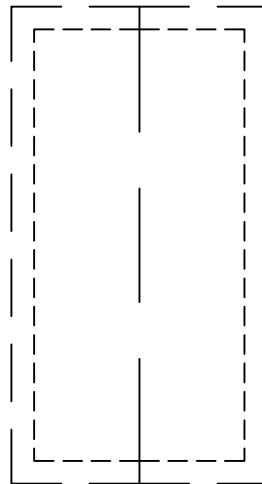

A07 installation line


Stitch to A02

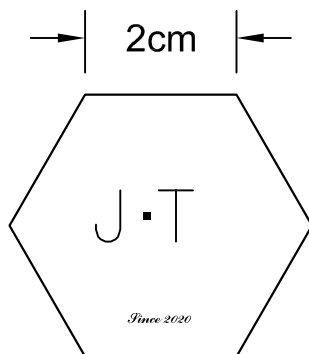


TEST: Print to A4 at 100% scale, make sure the length of a side measures 2cm.

Attractive

Glue it together with page H

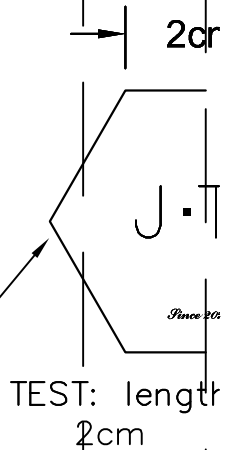


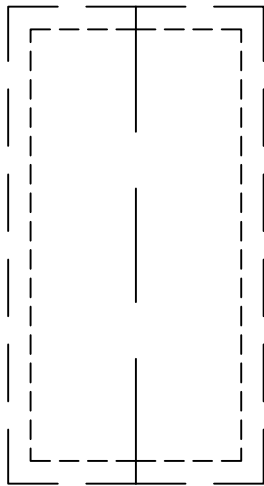

A07 installation line

cm


Glue it together
with page G



th of a side

Attractive

2cm





TEST: Print to A4 at
100% scale, make sure
the length of a side
measures 2cm.

Note: Leather recommended thickness: 2.0mm


Guleing with PAGE G

PAGE H

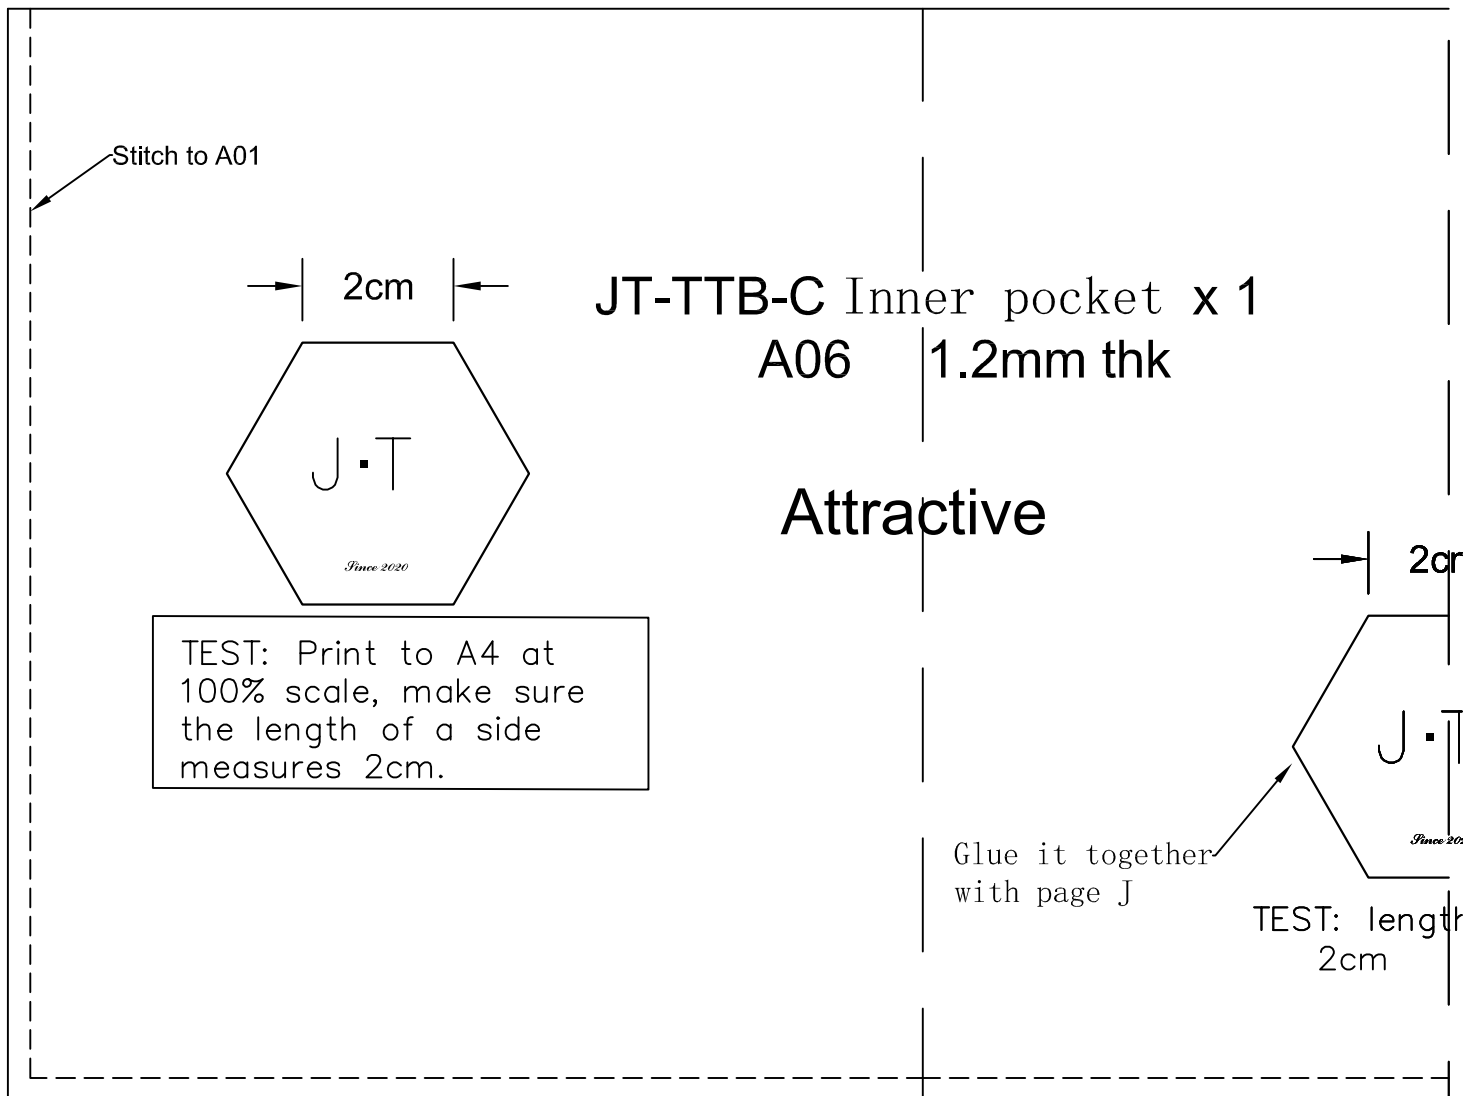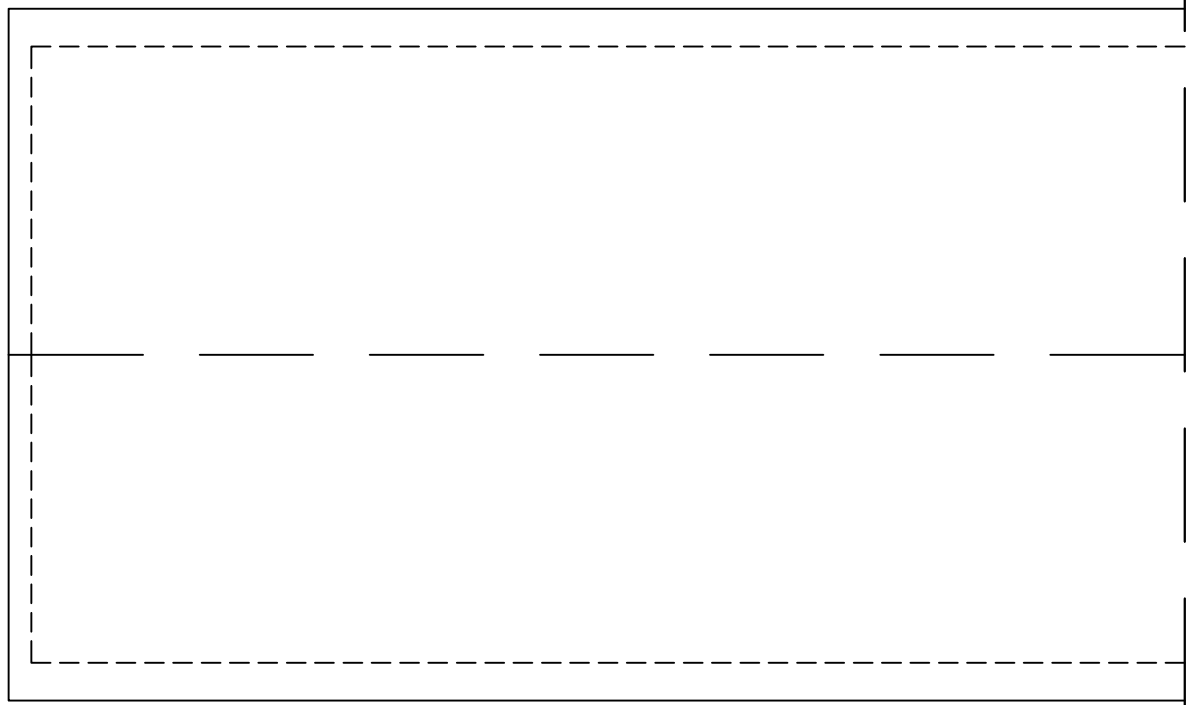

For overlap gluing only


PAGE I

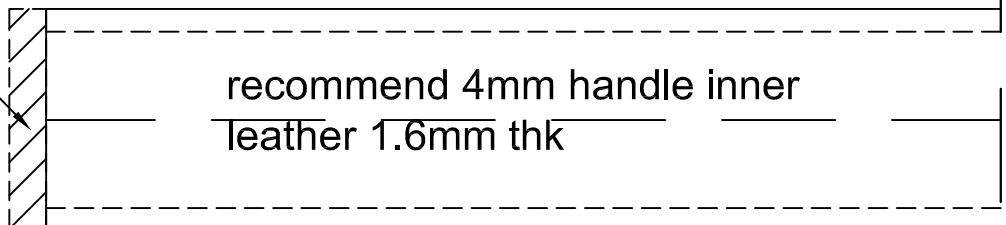

Note: Leather recommended thickness: 2.0mm

Cutting & gluing with PAGE H

JT-TTB-C Bottom leather x 1
A05

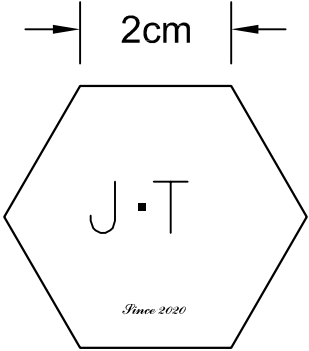

TEST: Print to A4 at 100% scale, make sure the length of a side measures 2cm.

Attractive

PAGE J

Note: Leather recommended thickness: 2.0mm

JT-TTB-C Handle x 4
A07 (half only)

Guleing with PAGE G