



TEST PAGE

Make sure everything is the right scale and you can see the black border around this page on all sides.

The designs, instructions and patterns are only intended for personal use by sewing hobbyists. All industrial use is prohibited. The materials, including the photographs, drawings, instructions, articles and patterns, are protected by copyright laws and the right of reproducing them by any means or in any form is exclusively reserved for the copyright holder. The copying of the material onto a device that can be used for duplicating it is also regarded as reproduction. Copyright © Marina Karlova. All rights reserved.

You can sell the items you create using this pattern but I would kindly ask you to buy the pattern again for every 10 items you sell, this is a way for me to get my royalties.



NOTICE FOR RUSSIAN SPEAKING CRAFTERS

Мы с вами коллеги, поэтому давайте уважать друг друга. Пожалуйста, не нужно заниматься пиратством. Выкройки стоят не так уж дорого, и благодаря их продажам мы, дизайнеры, можем кушать, оплачивать счета и продолжать создавать для вас новые дизайны. Если эта выкройка попала к вам откуда-то еще, кроме как из моего магазина, пожалуйста, свяжитесь со мной и поделитесь информацией о том, где и как она распространяется.

Sloop



Karlova

I called it Sloop cause it only has one pocket and a single strap that holds both buckles.

Materials:

Something around 3 oz with medium to firm temper. 5-6 oz for straps. Drawstring (8-9 oz lace was what I used).

Hardware:

- 4 x 1" buckles
- 2 x 1" D-rings
- Grommets
- Rivets

Tools:

Scissors, knife (paper knife or rotary cutter would also work).
Stitching irons: my pattern is made for 5mm stitching irons (5 stitches per inch). If you are willing to use any other size please make sure that the hole count is the same where it has to be the same: pocket front and pocket gusset, the bottom should have twice as many holes as front and back panels each.
Needles - according to your thread size, a pair of harness needles.
Mallet, grommet setter, rivet setter, hole punch.

Any questions or comments, e-mail me: lissius@gmail.com.

Join our Karlova Leatherwork Patterns Group on Facebook!
www.facebook.com/groups/karlovadesign

Instructions:




Print the pattern at actual size (100%). If printing A4 or US Letter: Use the reference on top of each page to make sure everything is printed correctly. Join the pages together, cut out the pieces.

1. Assemble the pocket. Attach the buckle with the rivet on the front panel. Attach the keeper with 2 rivets. Sew front panel of the pocket and the gusset with overlapping seam. Attach the pocket to the front panel of the backpack. Attach the pocket flap to the front panel of the backpack (the pocket closure strap with the main flap buckle is sewn on with the same seam). Add the keeper to the pocket closure strap and install the rivet.
2. Assemble the back panel, see instructions on the pattern piece. Install the grommets. Assemble the flap (the strap end goes into the oblong hole on the flap and is riveted on the flesh side of the flap, see photos for reference). Sew the flap to the back panel.
3. Sew the back panel to the bottom starting at the holes marked with arrows. Sew the front panel starting at the same hole (one or another). You should end up with front and back panel stitches starting and ending at the same hole and overlapping.

4. Stitch the sides with overlapping seams with front panel being on top, sew in the strap buckle holders (see the pattern for instructions).
5. Make the shoulder straps, on this pattern you have the ends, as straps are usually being pre-cut. Attach the top ends of the straps to your D-rings, and buckle them up on the bottom. Insert the drawstring. I tie the knot but alternatively you can make the stopper (you will find it on the pattern).


Some photos of different parts: the top shoulder strap attachment assembly with reinforcement and top handle, the pocket closure strap, the flap strap attachment.



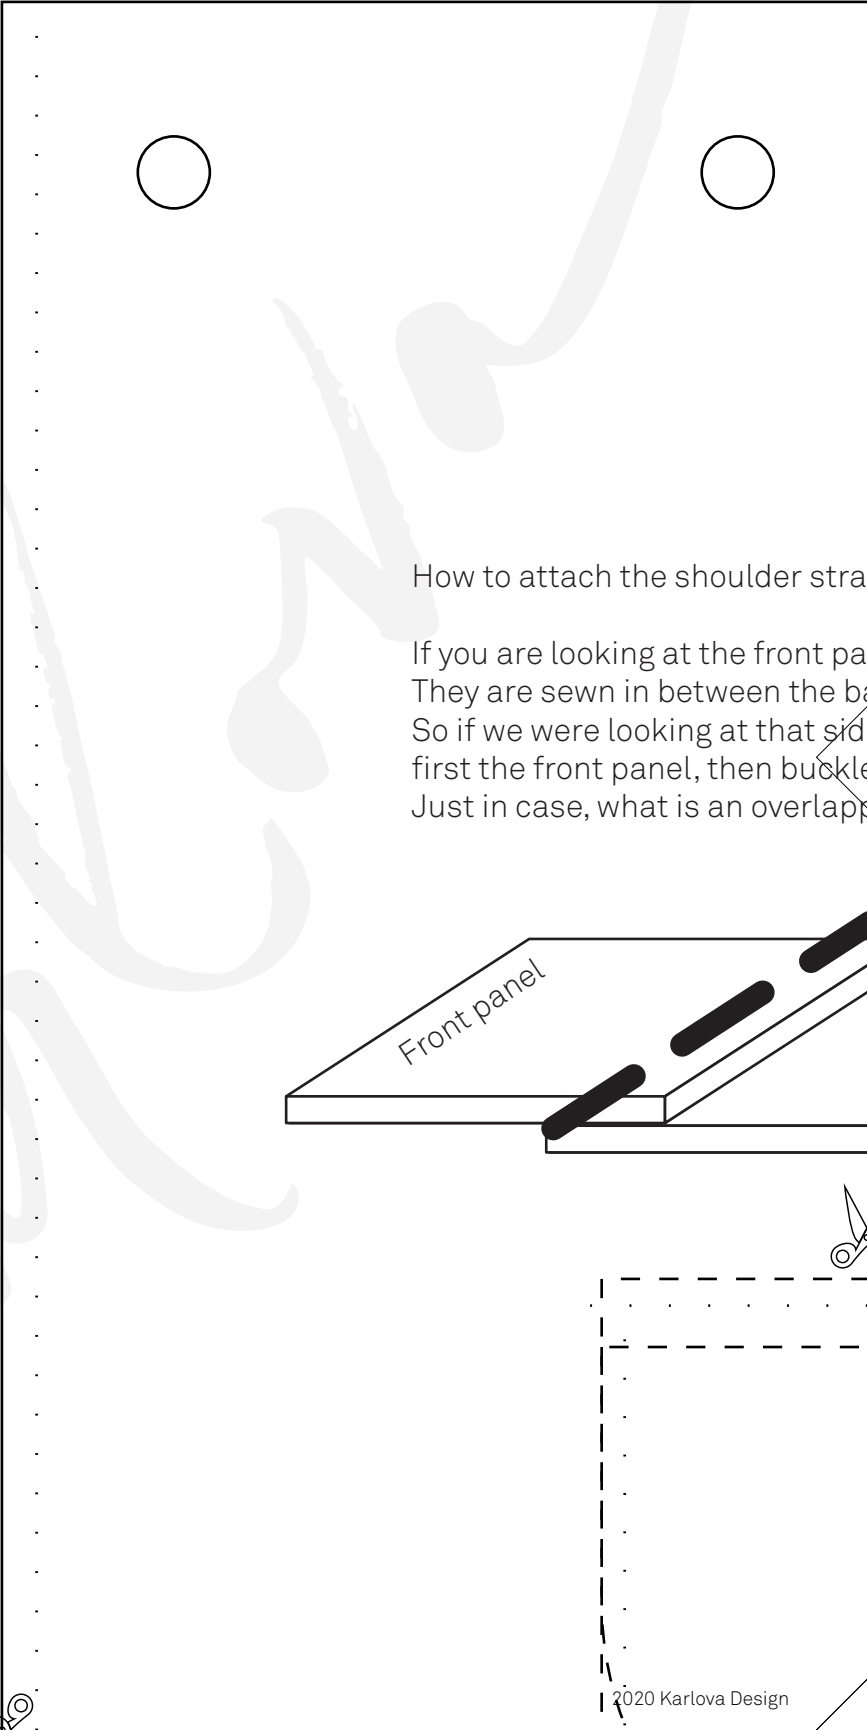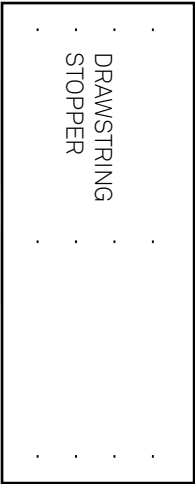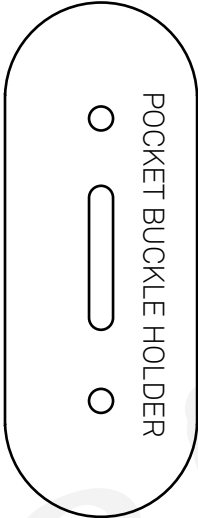

How to attach the shoulder strap

If you are looking at the front panel
They are sewn in between the bag
So if we were looking at that side
first the front panel, then buckle
Just in case, what is an overlap

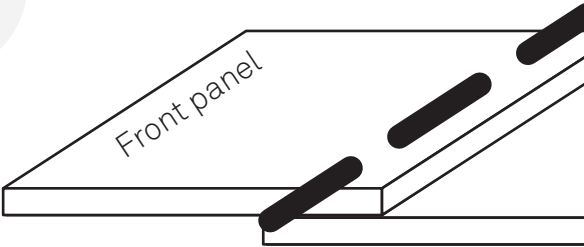

0cm 1cm 2cm 3cm 4cm 5cm

A-2

1in 2in 3in





up buckle holders:

panel (grain side) the buckles should be facing you, like I drafted them.
back and front panel just like this, front panel being on top.

the seam, then layers go like this:

the holders, then back panel. Don't forget this is an overlapping seam!
ing seam (you can see photos for reference also:

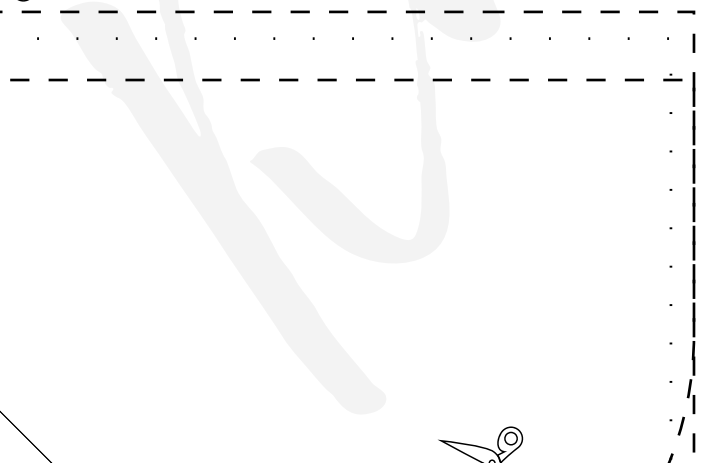

0cm 1cm 2cm 3cm 4cm 5cm

A-3

1in 2in 3in

BACK PANEL


Straps assembly from bottom to top: Reinforced
Then goes the top handle. And lastly, the D-ring
I placed reinforcement on outside. That's an op

TOP D-RING
STRAP HOLDER X2

0cm 1cm 2cm 3cm 4cm 5cm

A-4

1/8 1/4 3/8 1/2 5/8 3/4 1in 2in 3in

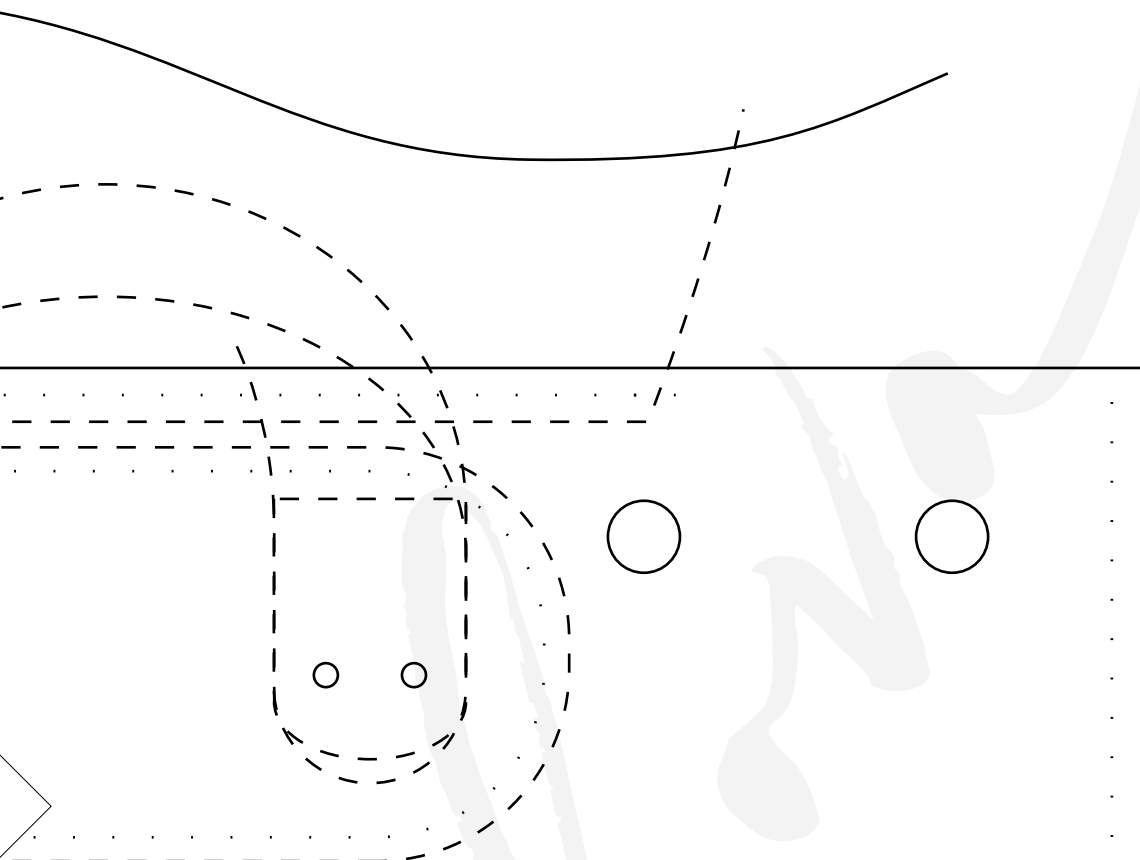

ement goes on the flesh side. Then goes the back panel.
g strap holders on top with the same rivets. On my backpack
tion, but not the best one.





0cm 1cm 2cm 3cm 4cm 5cm

A-5

1/8 3/8 1/2 5/8 3/4 1in 2in 3in


MAIN FLAP


PALEGE CAN BE USED HERE

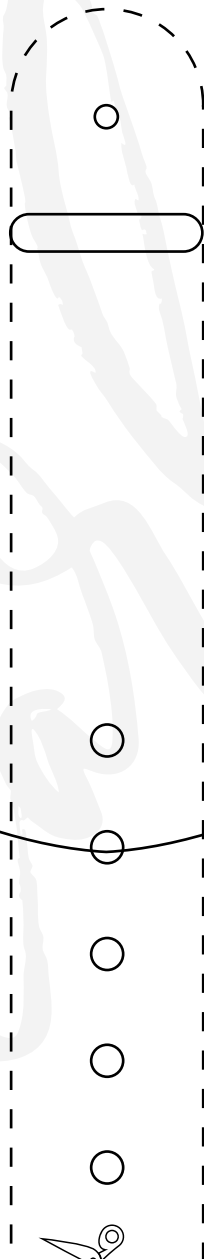



A-6


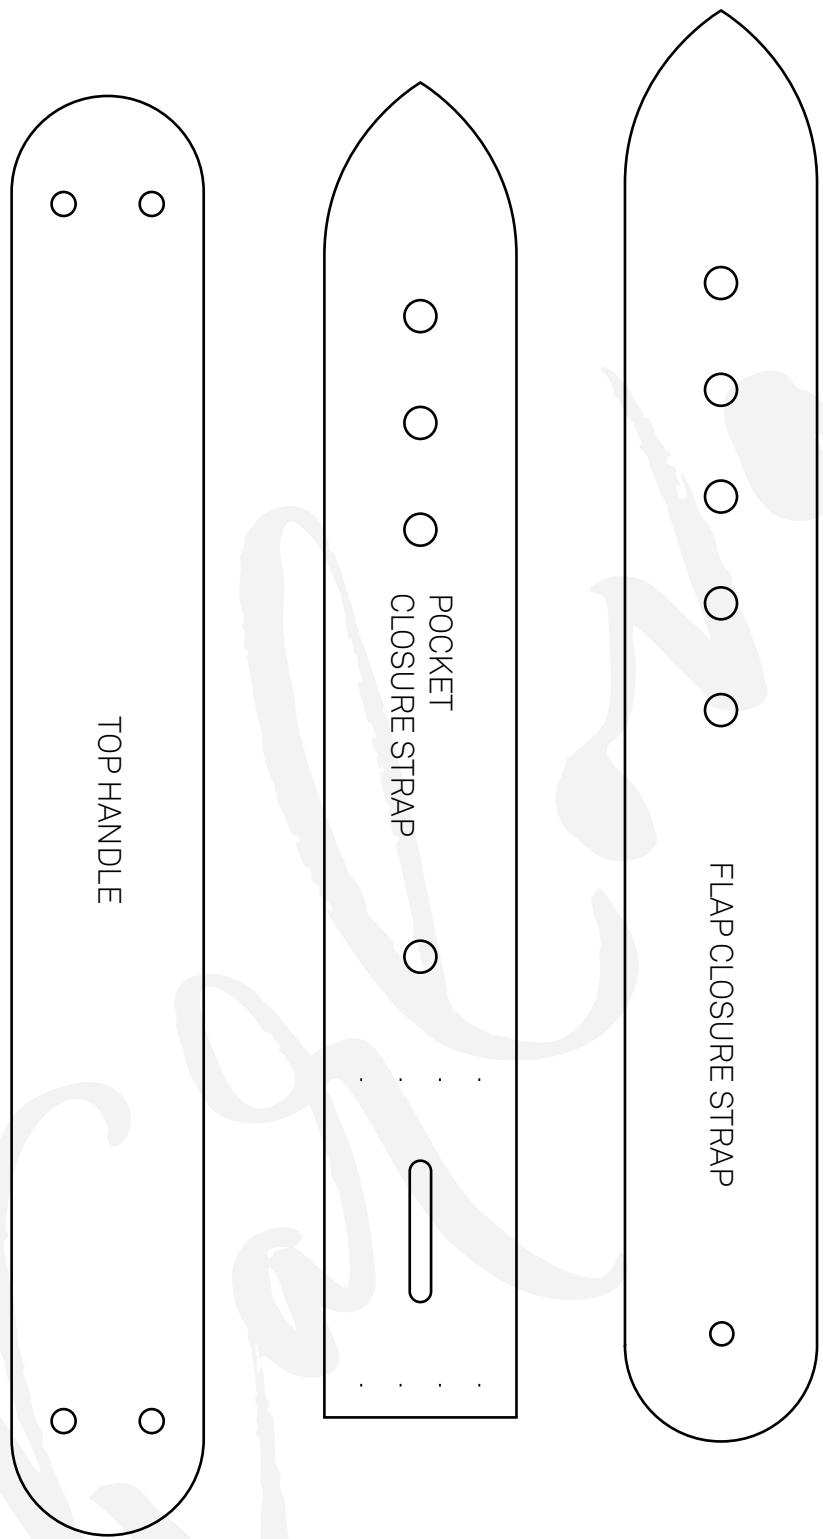


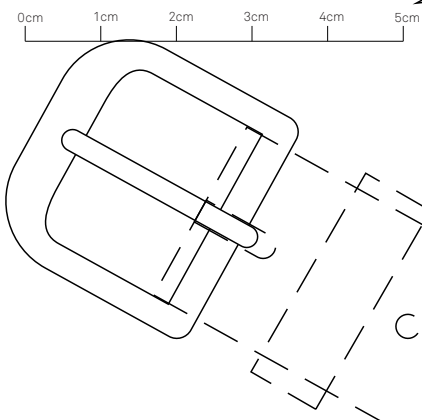





B-1




Same amount of holes as on the back panel + 2

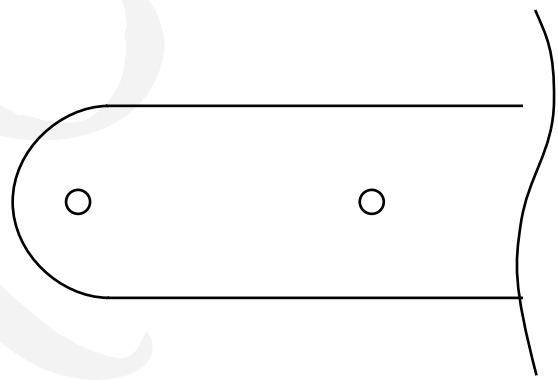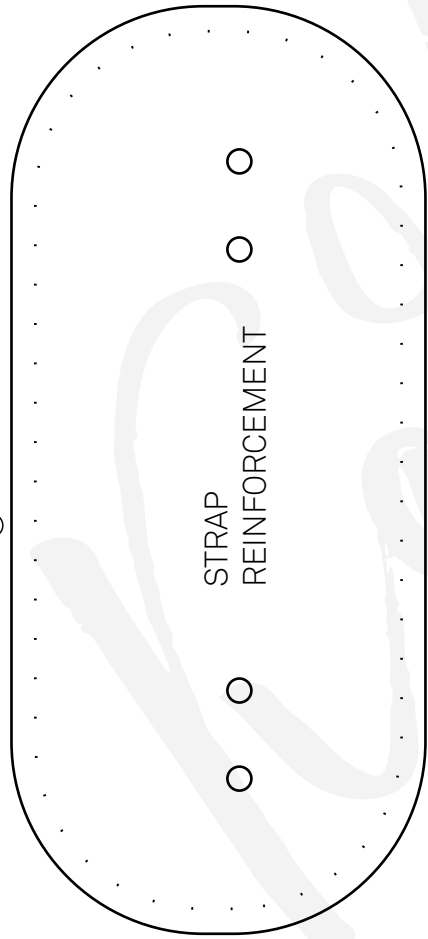

SHOULDER STRAP, LENGTH=28"

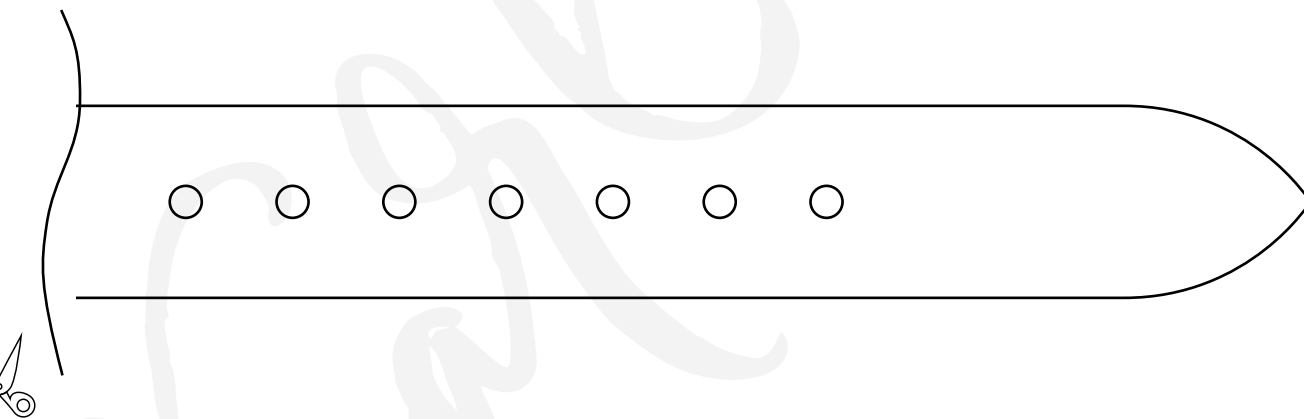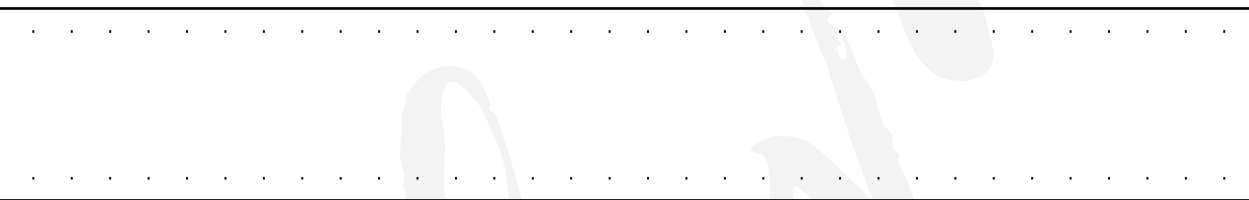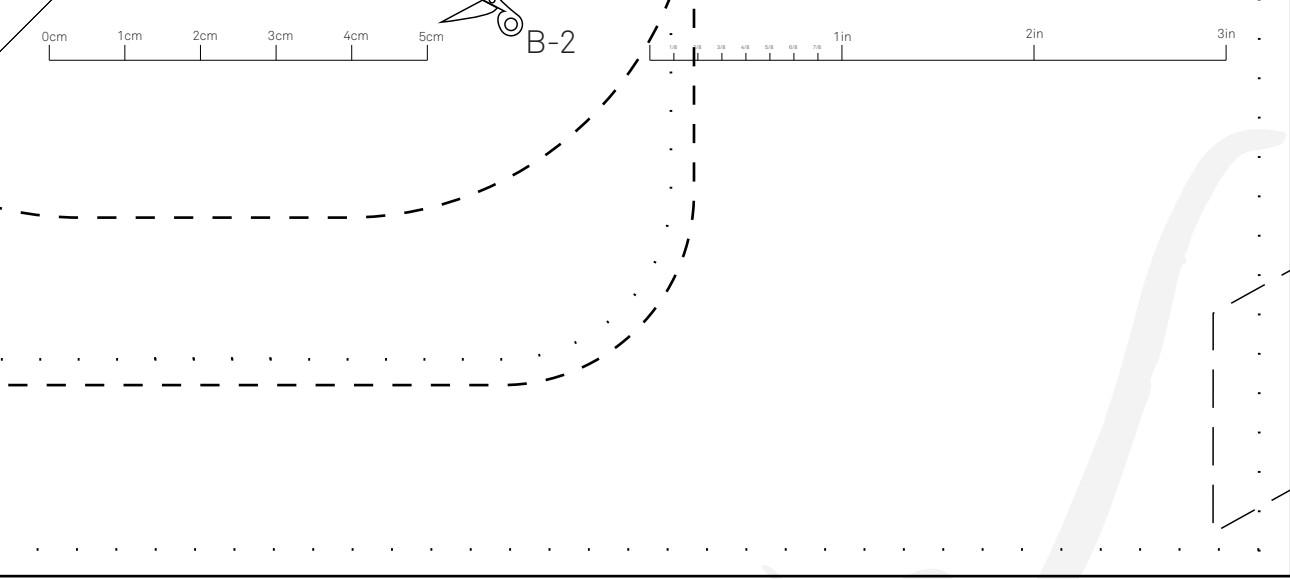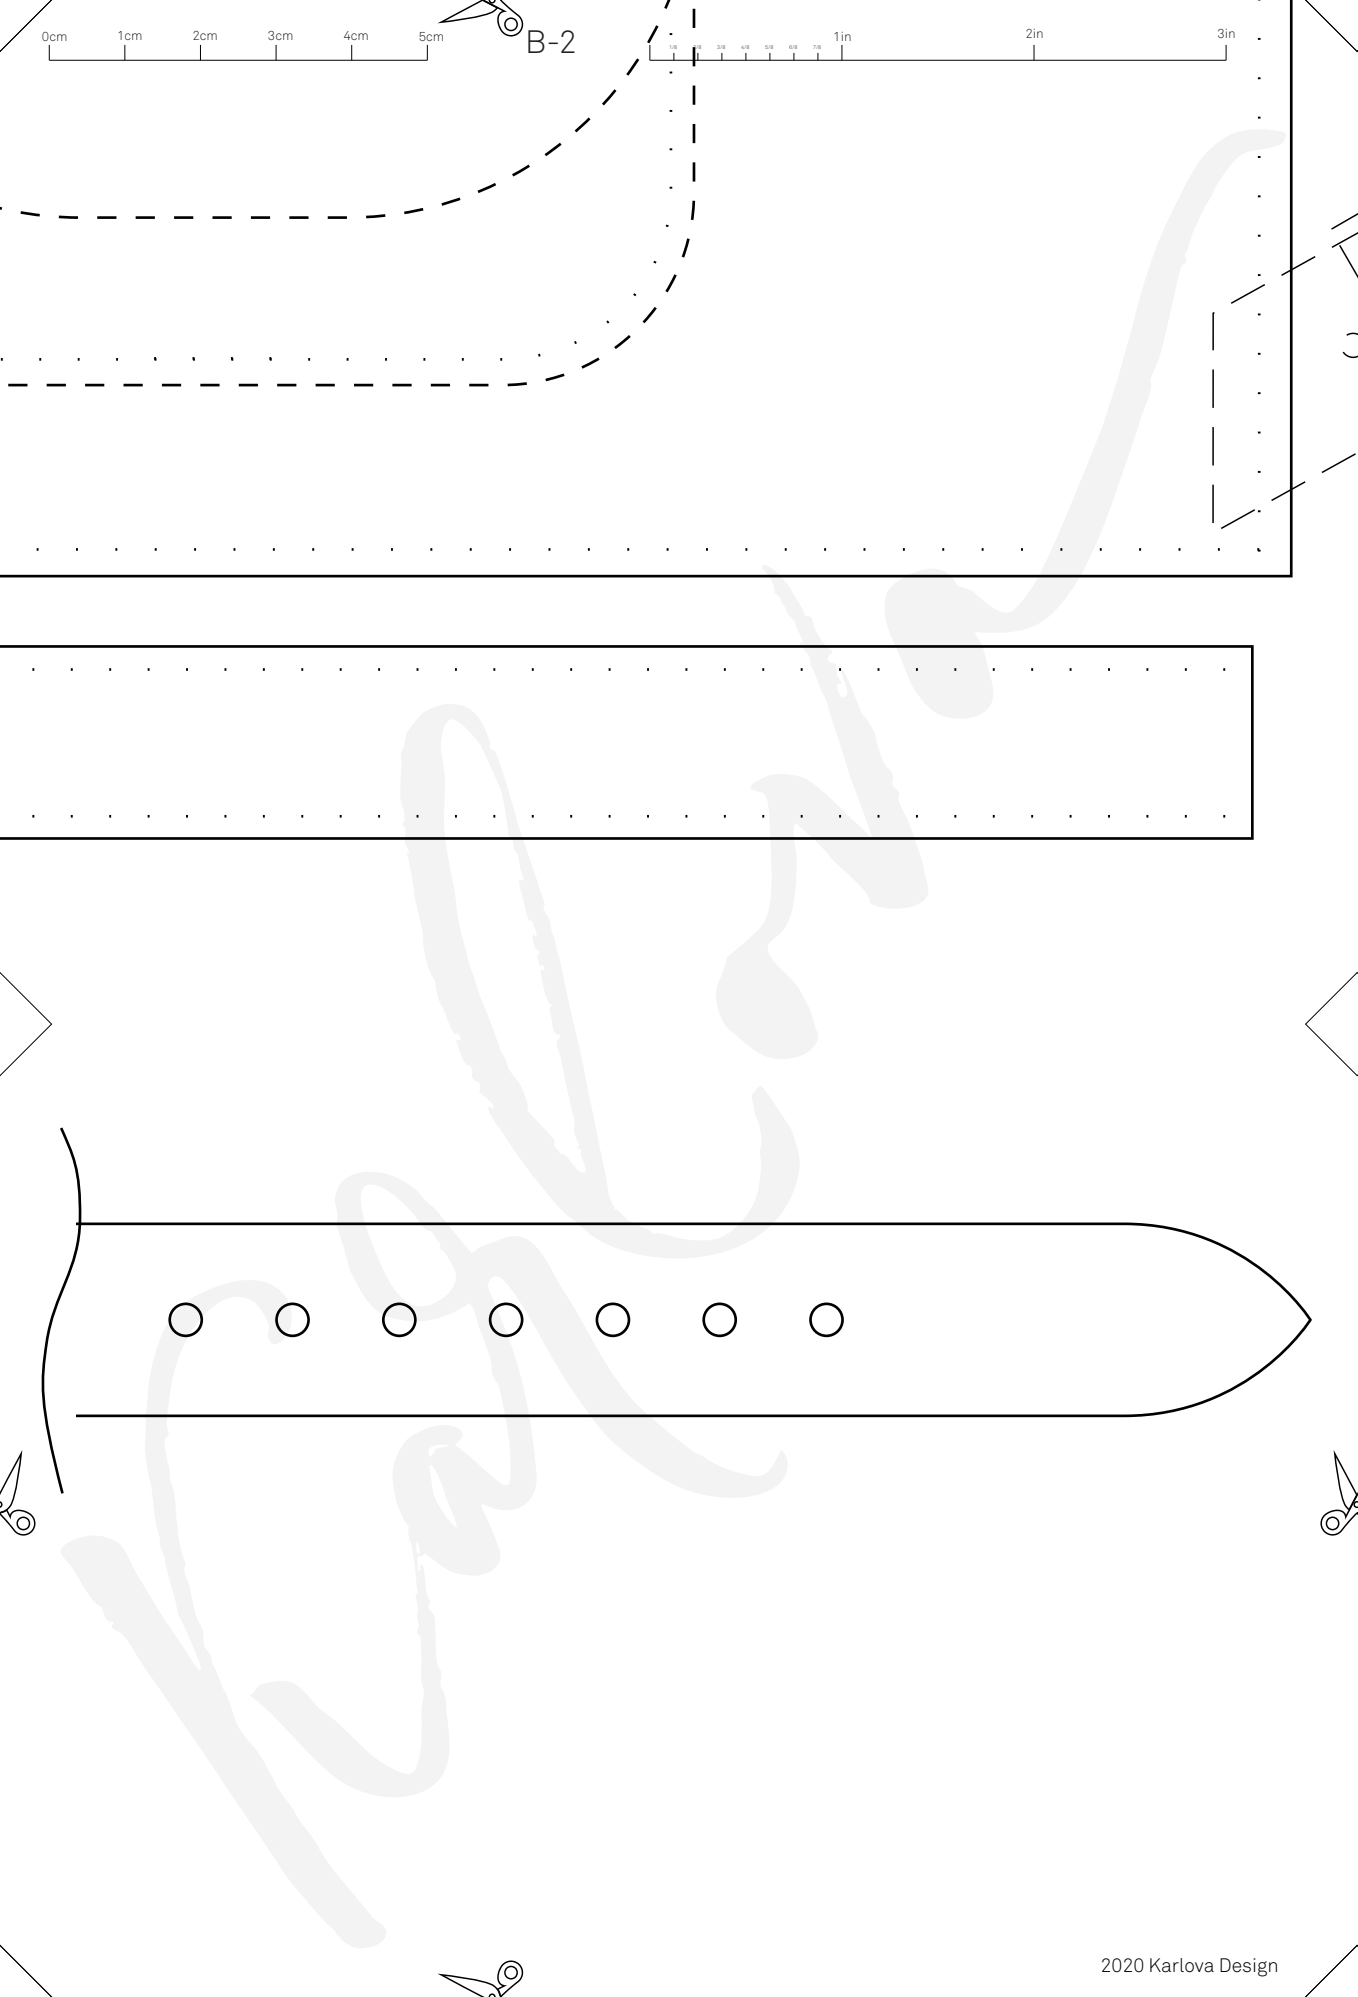

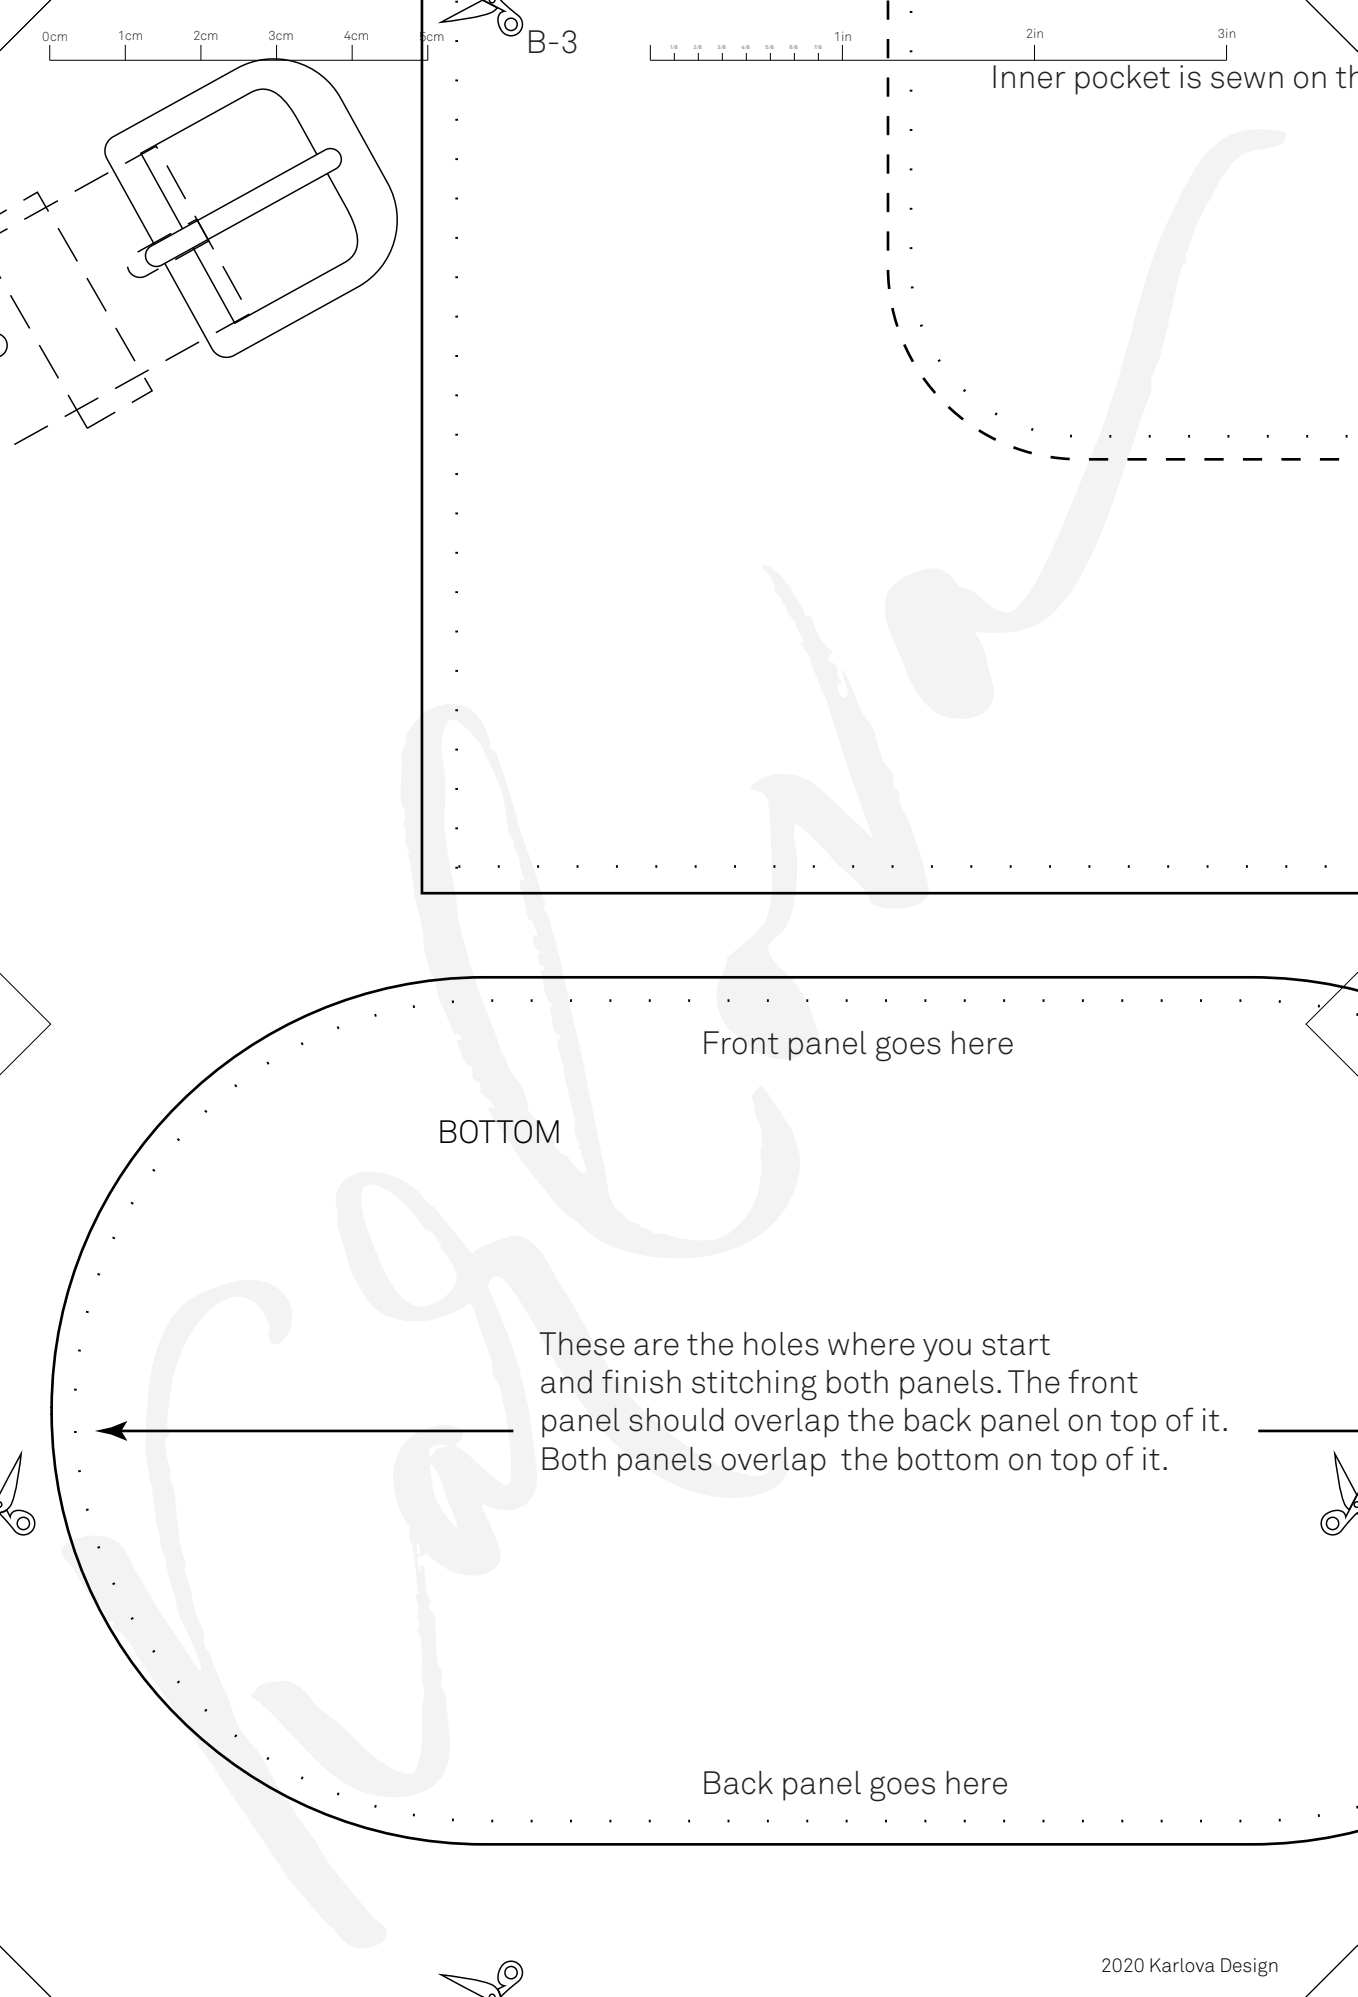

B-3

Inner pocket is sewn on the




Front panel goes here





BOTTOM

These are the holes where you start and finish stitching both panels. The front panel should overlap the back panel on top of it. Both panels overlap the bottom on top of it.

Back panel goes here

0cm 1cm 2cm 3cm 4cm 5cm B-4
the flesh side.

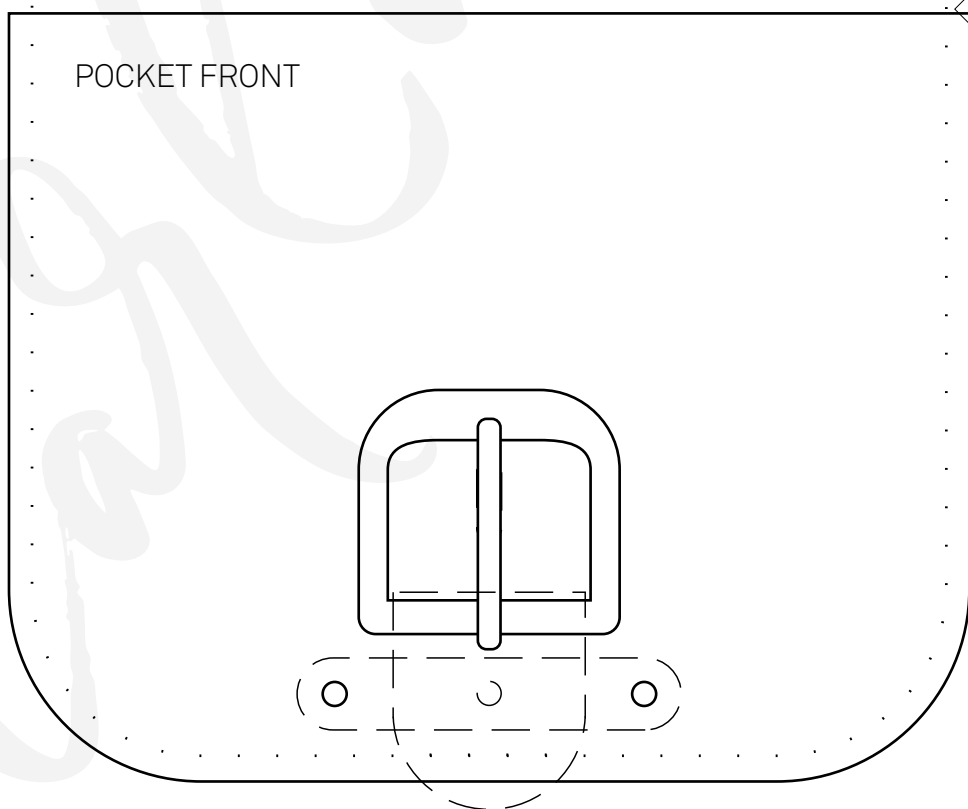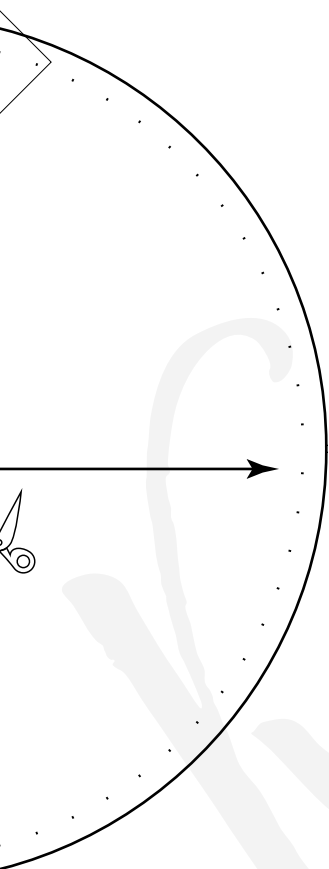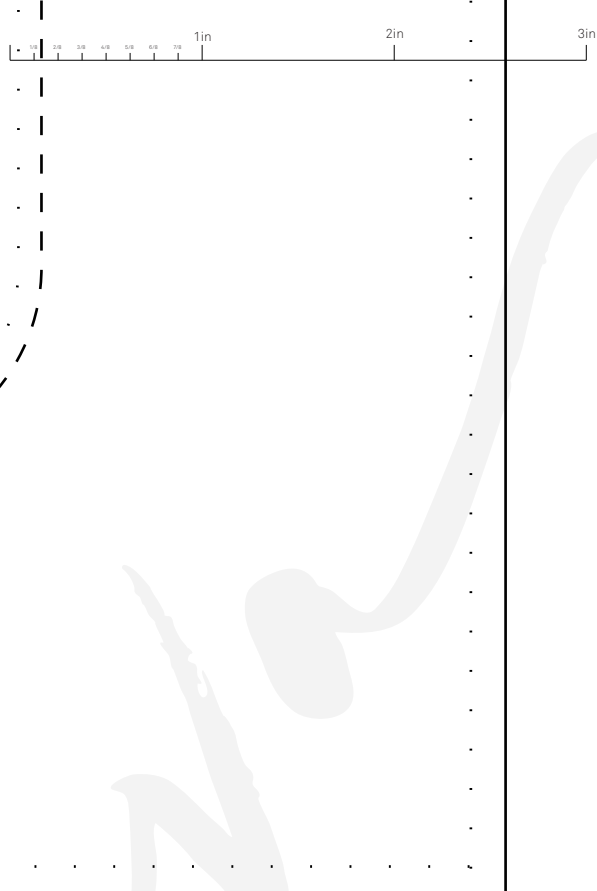

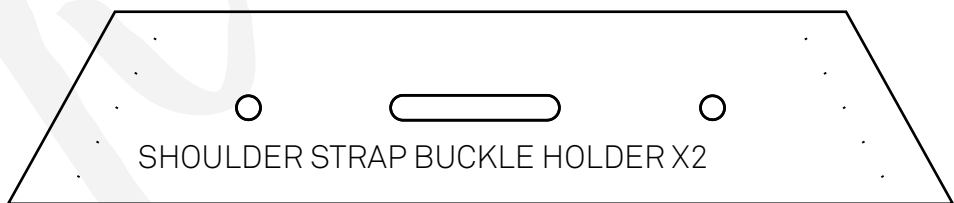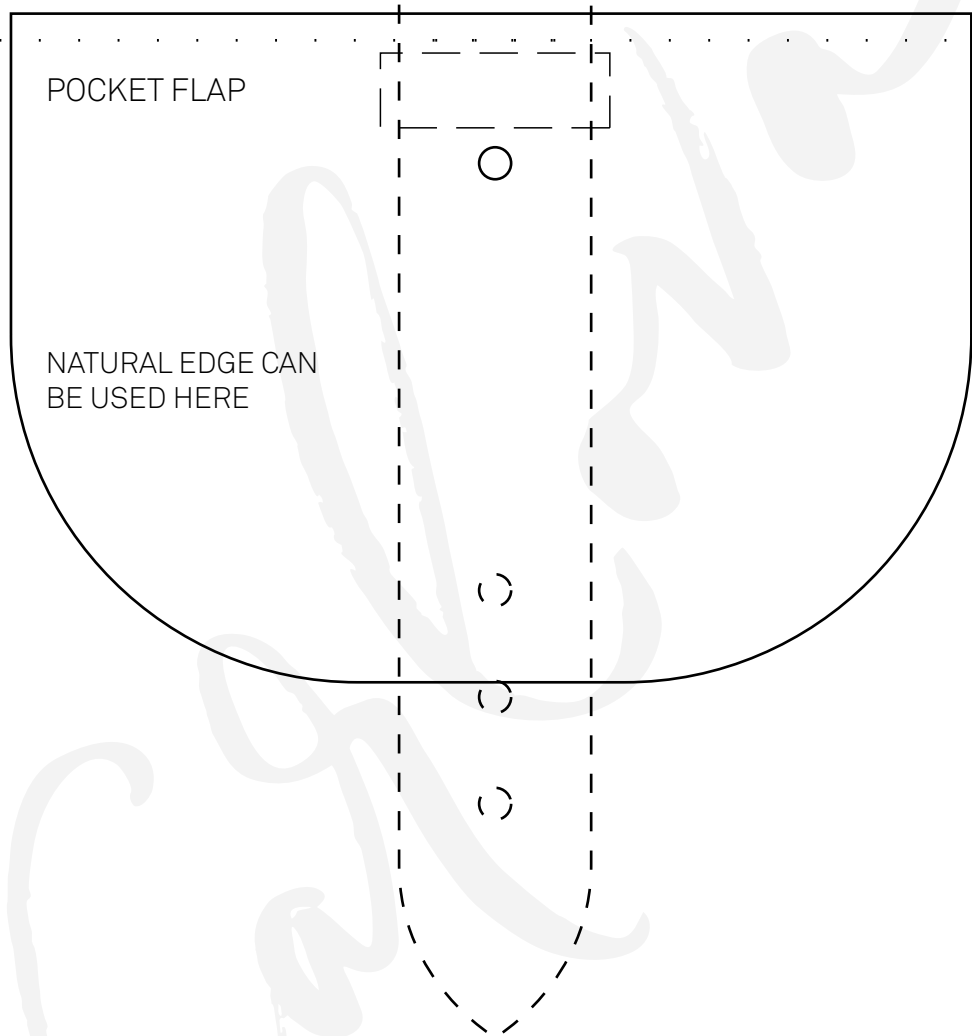

0cm 1cm 2cm 3cm 4cm 5cm

B-6

1in 2in 3in

2in

3in

INNER POCKET FLAP

INNER POCKET

