

ROUND ZIPPER COIN PURSE PATTERNS



**English
A4 ver**

【INDEX】

- **Print Guide ----- P2**
- **Material List ----- P3**
- **Instruction ----- P4-P12**

Thank you very much for purchasing “HAKU’s Patterns”.
The making process has been uploaded on YouTube. Please refer it together.
YouTube : https://www.youtube.com/watch?v=_qjqCh-fVik&t=365s

If you have any questions or notice anything about the pattern,
Please contact us via email or YouTube comment.
I hope you enjoy making and complete a wonderful work by yourself!

Print Guide



Use "Adobe Acrobat Reader" to view and print this file.
Printing from a web browser may not produce the correct dimensions.

Print

Printer: Canon MP470 series Printer

Copies: 1

☒ Print in grayscale (black and white) ☐ Save ink/toner

Pages to Print

☒ All ☐ Current ☐ Pages 1 - 4

More Options

Page Sizing & Handling

Size Poster Multiple Booklet

☐ Fit ☒ Actual size ☐ Shrink oversized pages ☐ Custom Scale: 100 %

☐ Choose paper source by PDF page size

☐ Print on both sides of paper

Orientation: ☐ Auto ☐ Portrait ☒ Landscape

Comments & Forms

Document and Markups Summarize Comments

Document: 11.7 x 8.3 in

11.69 x 8.27 Inches

L-shaped Zip wallet: Pattern (page 1 of 4)

Scale Check

3mm X 3mm

[A] Outer 1x1.2 - 1.8mm

pitch 3.2mm

This pattern is optimized for 3mm pitch printing.

Page 1 of 4

Print Cancel

Page Setup...

[file] → [print]

1. Page Sizing & Handling : **“Actual size”**
2. Orientation : **“Landscape”**
3. Page setup... : **Check paper size**

ページ設定

用紙

3

A4

印刷の向き

☐ 縦(O)

☒ 横(A)

余白 (ミリ)

左(L): 25

右(R): 25

上(T): 25

下(B): 25

OK

キャンセル

You can download “Adobe Acrobat Reader” for free.

<https://get.adobe.com/reader/>

Material List

These materials are used in my YouTube video and this document.
Please use it as a reference when you choose ingredients.

▼Leather Materials :

Material	Use	Sign	Part name	Thickness	Quantity	Rough cut size	DS 1DS=10cm×10cm
Vege-tanned leather	Outer	A	Outer	1.5mm	1	13cm × 18cm	2.34 DS
	Inner	B	Inner_Center	1.2mm	1	13cm × 11cm	1.43 DS
		C	Inner_Side	1.2mm	2	13cm × 15cm	3.9 DS
		D	Gusset	0.8mm	2	15cm × 8cm	2.4 DS



TOTAL: 10.07 DS

▼Auxiliary materials :

Material	Use	Sign	Remarks
BONTEX	Core	E	Size : 11cm×7cm / Thickness:0.8mm /Quantity:2
Zipper	-	-	YKK EXELLA Size:#5 / Width:30mm / Length:35cm

*"Rough cut size" and "DS" are calculated by converting the part size (Include Margin) into a square, and are used only as a guide for the amount of materials.

Production Overview

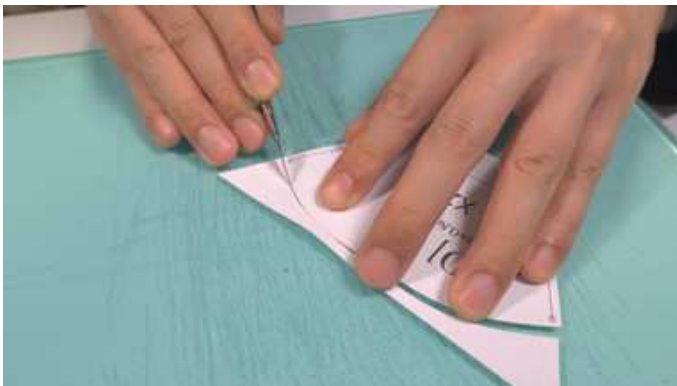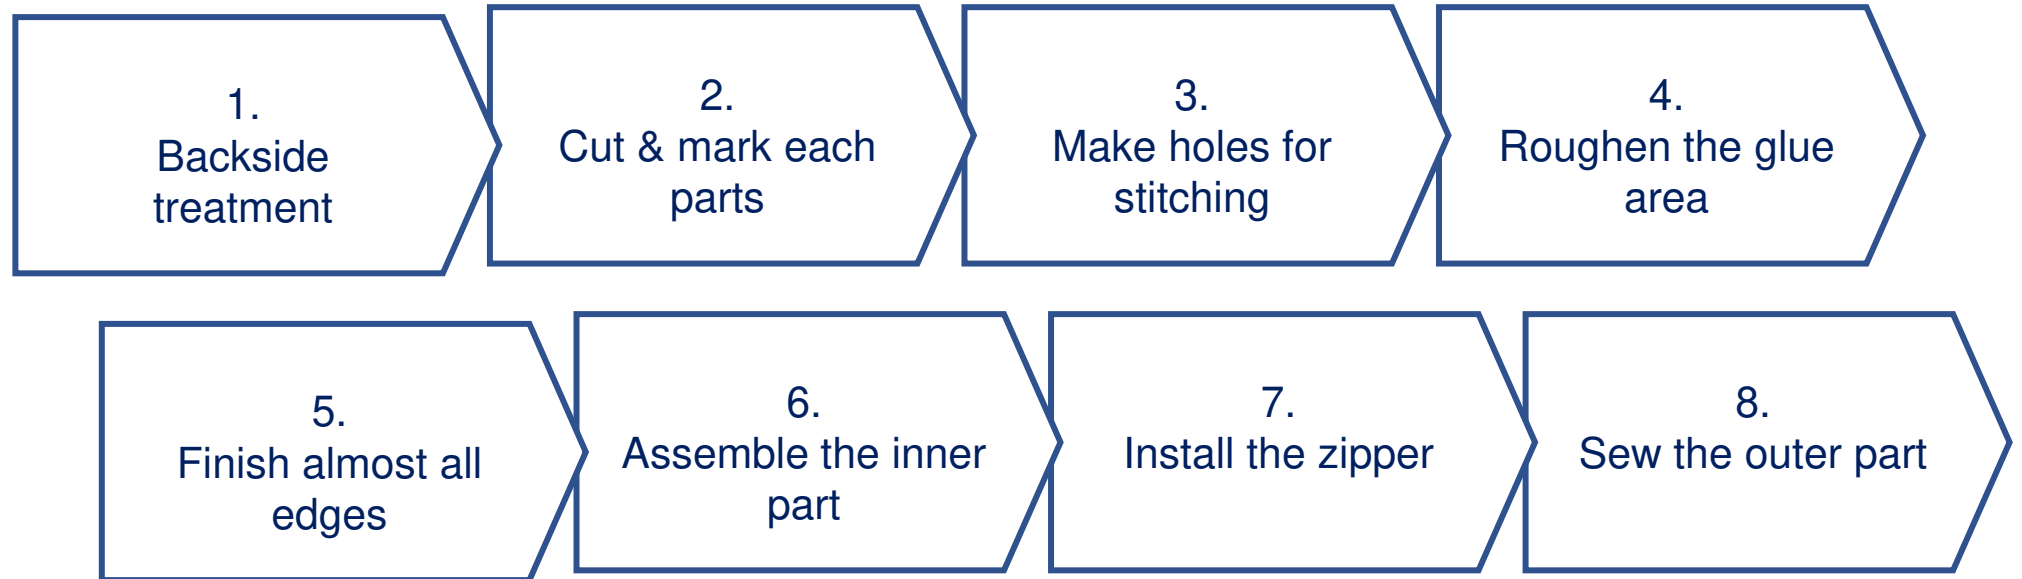

1. Backside Treatment


Suppresses fluffing on the back of [A], [C], [D].

2. Cut & mark


Cut out each part and mark it as follows.

Be careful not to forget marking each backside.


[A] part

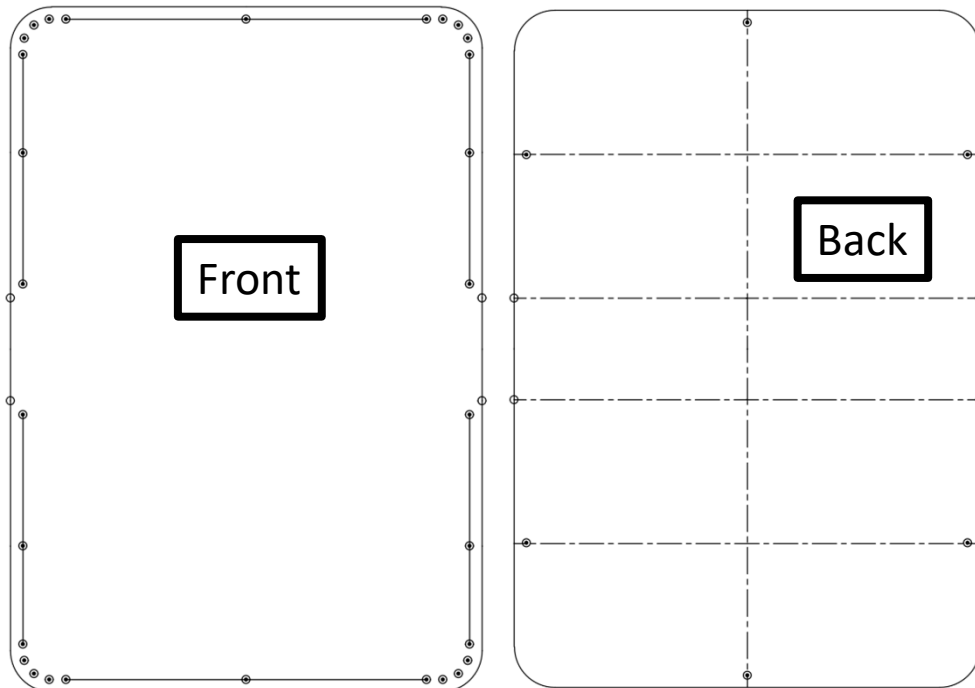


[B] part X2

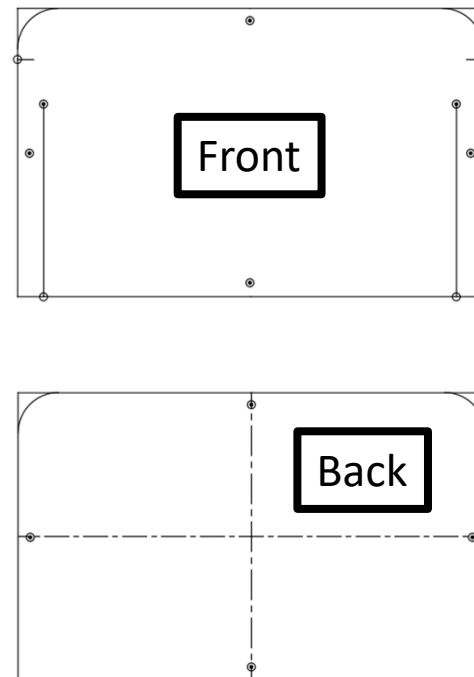


[C] part X2

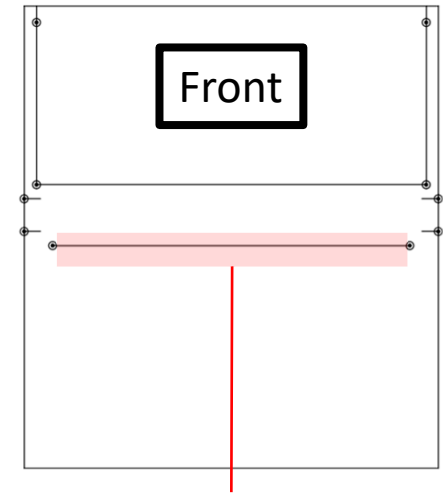


Mark only one of the two

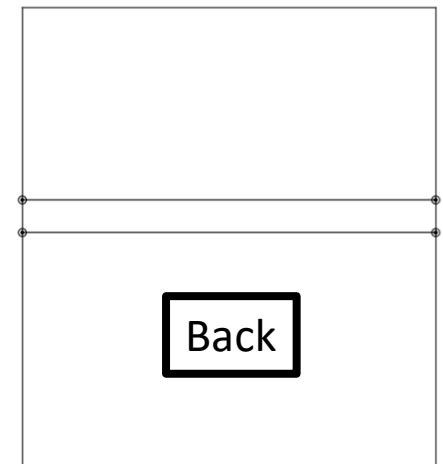

[D] part X2


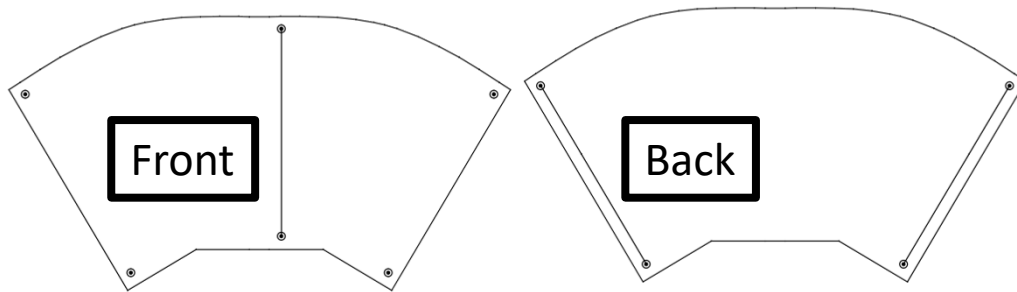


[E] part X2

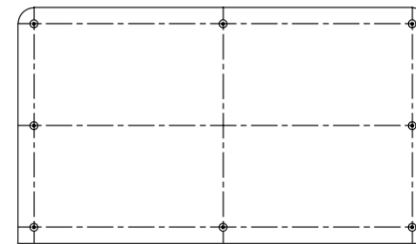


3. Make the stitching holes


- [A] & [B] :**
- Adhere [A] and [B] with double-sided tape for temporary fixing, and make stitching holes from the [A] side.
 - Cut out [B]'s corner along [A].

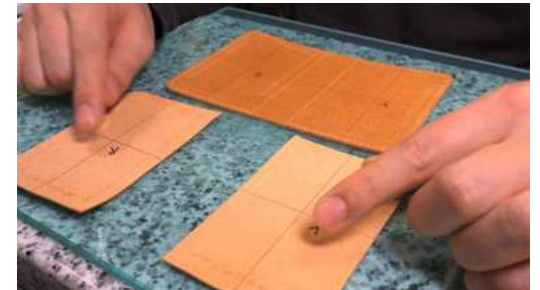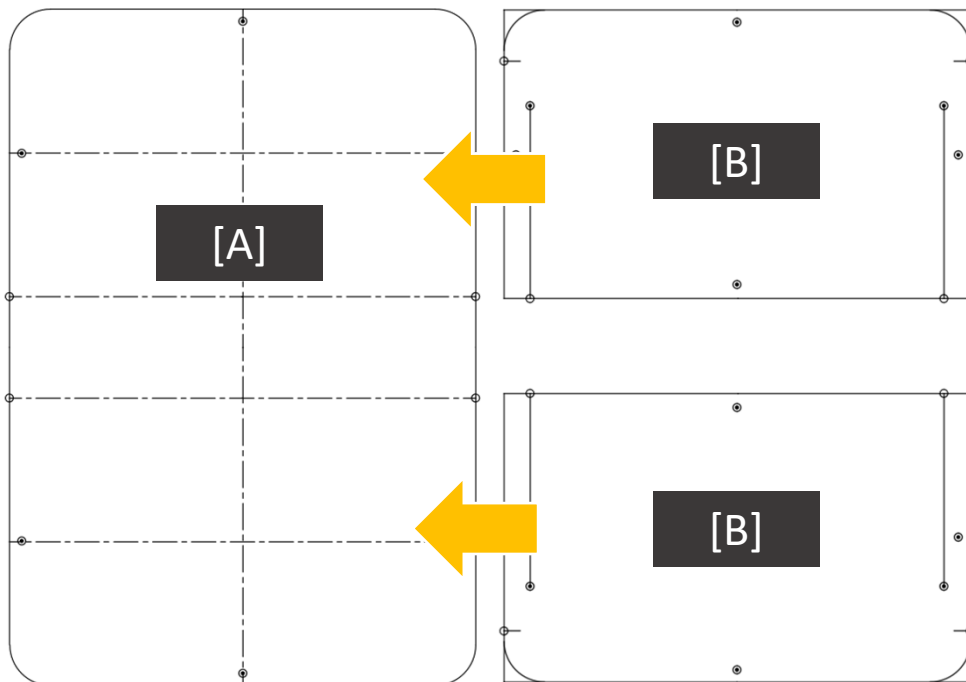

[C] : Be careful where you make stitching holes on only one side.

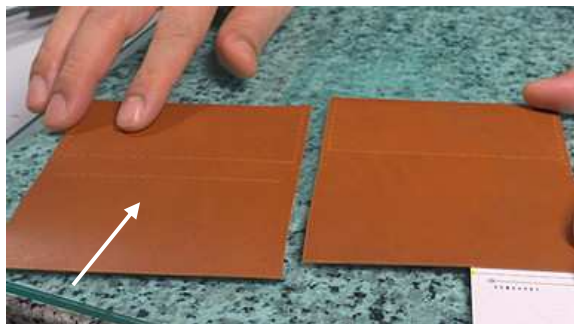


[C]

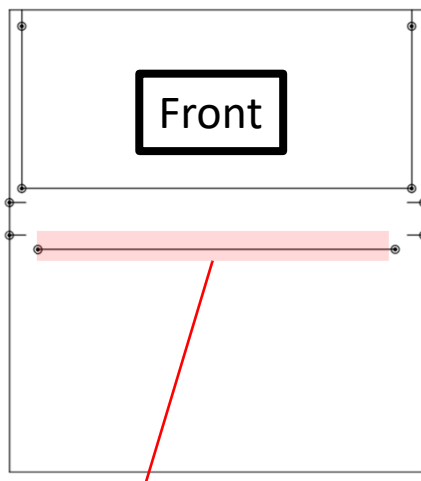

Mark only one of the two

[D] : Make holes on both sides of the gusset from the back.

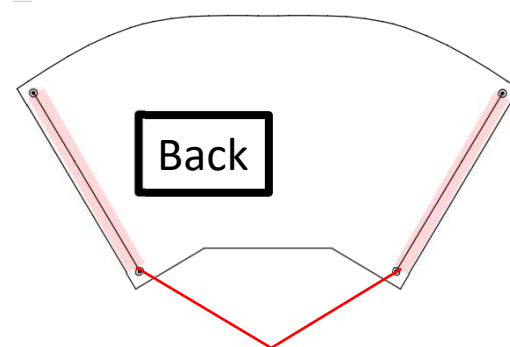


Punch from back side


[D]

4. Roughen the glue area

Roughen the glue area before finishing edges. Please refer the diagrams below.

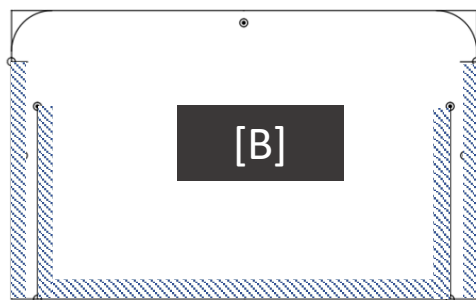


[B]

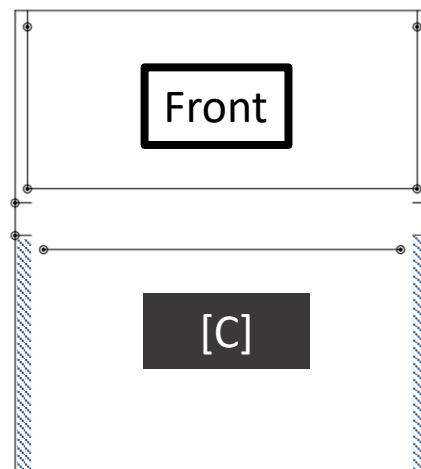


Front

[C]

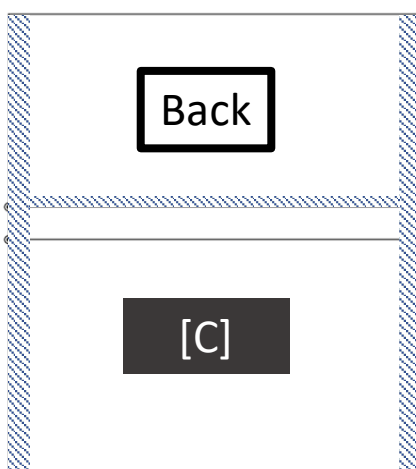

Back

[C]

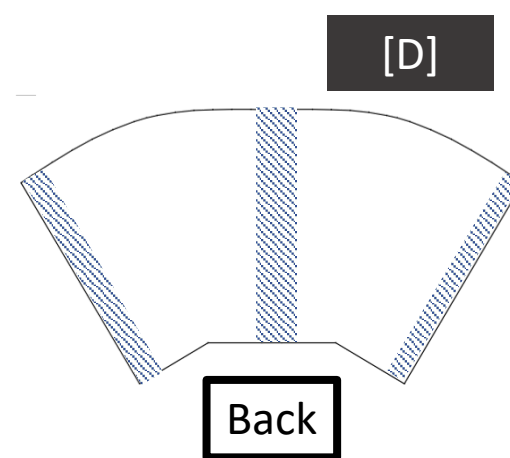


[D]

Back

5. Edge finishing

- Finish the edges the way you like.
- All edges except the part shown in the figure need to be finished.

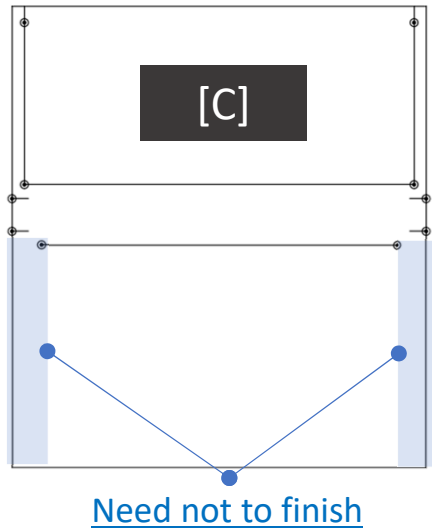

I hope these videos help you finish edge beautifully.




<https://www.youtube.com/watch?v=Y6bT5q7oTGk&t=34s>





<https://www.youtube.com/watch?v=UpAkRMIVeZg>

6. Assemble inner part

6-1: Stick and sew [C] to [B]

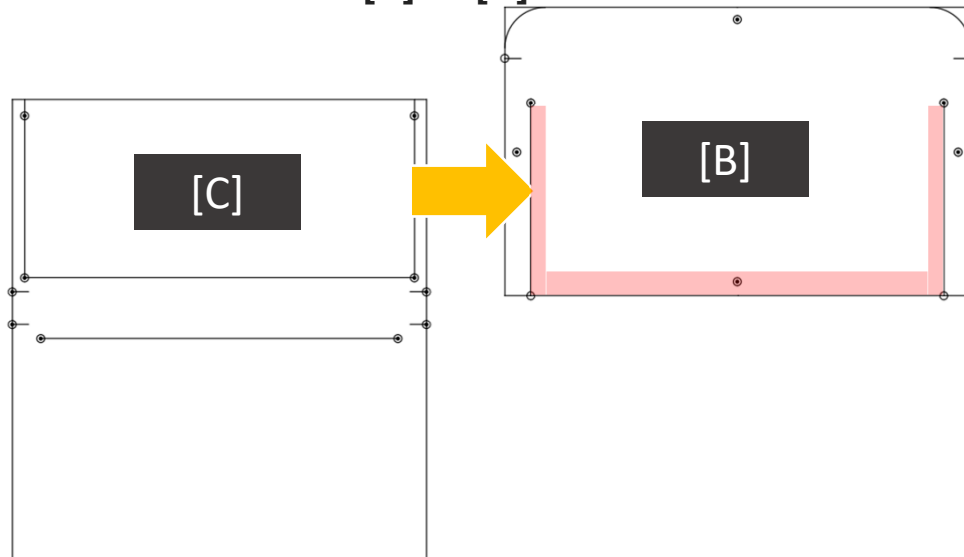


6-2: Paste [E] to ([B] + [C])

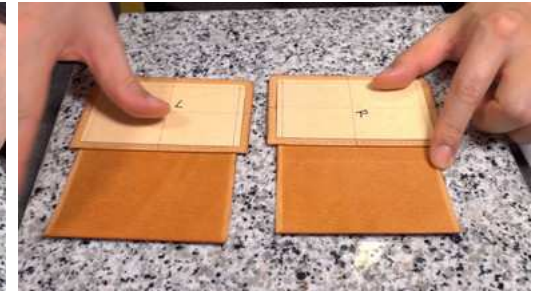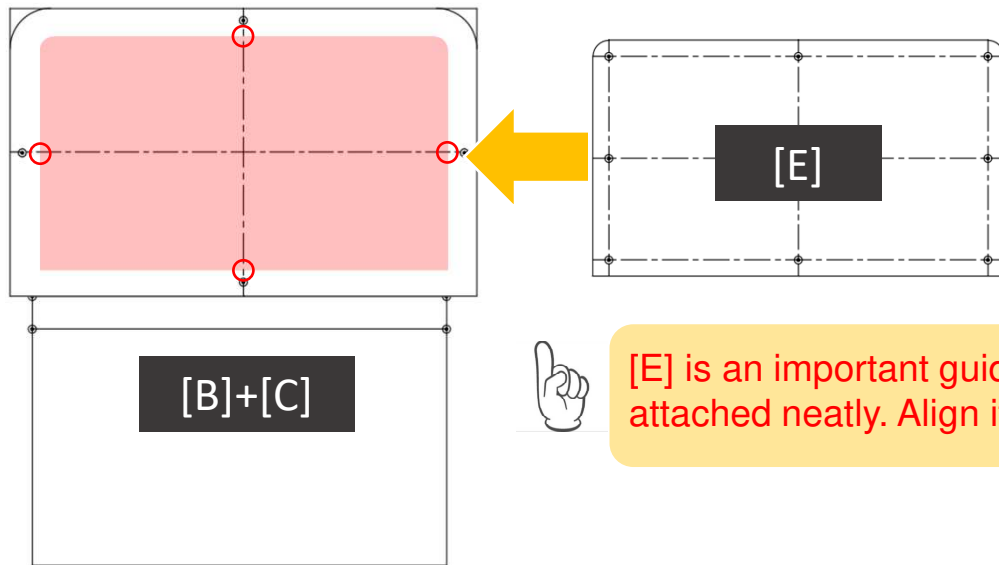


[E] is an important guide for attaching zipper. If [E] is distorted, the zipper cannot be attached neatly. Align it carefully.

6-3: Stick and saw two “[B]+[C]+[E]” together.

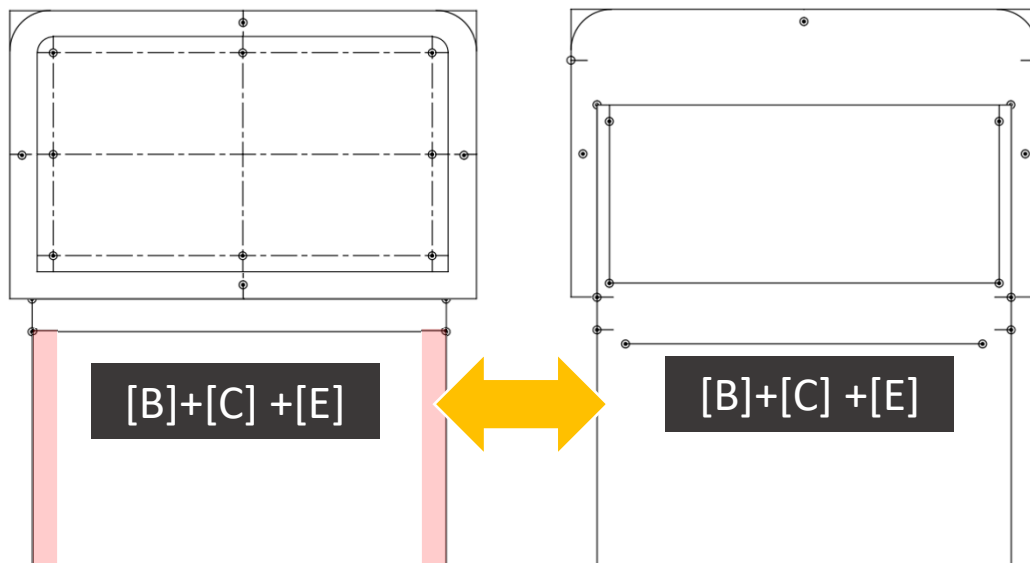

6-4: Stick the center of [D] to “[B]+[C]+[E]” and sew together


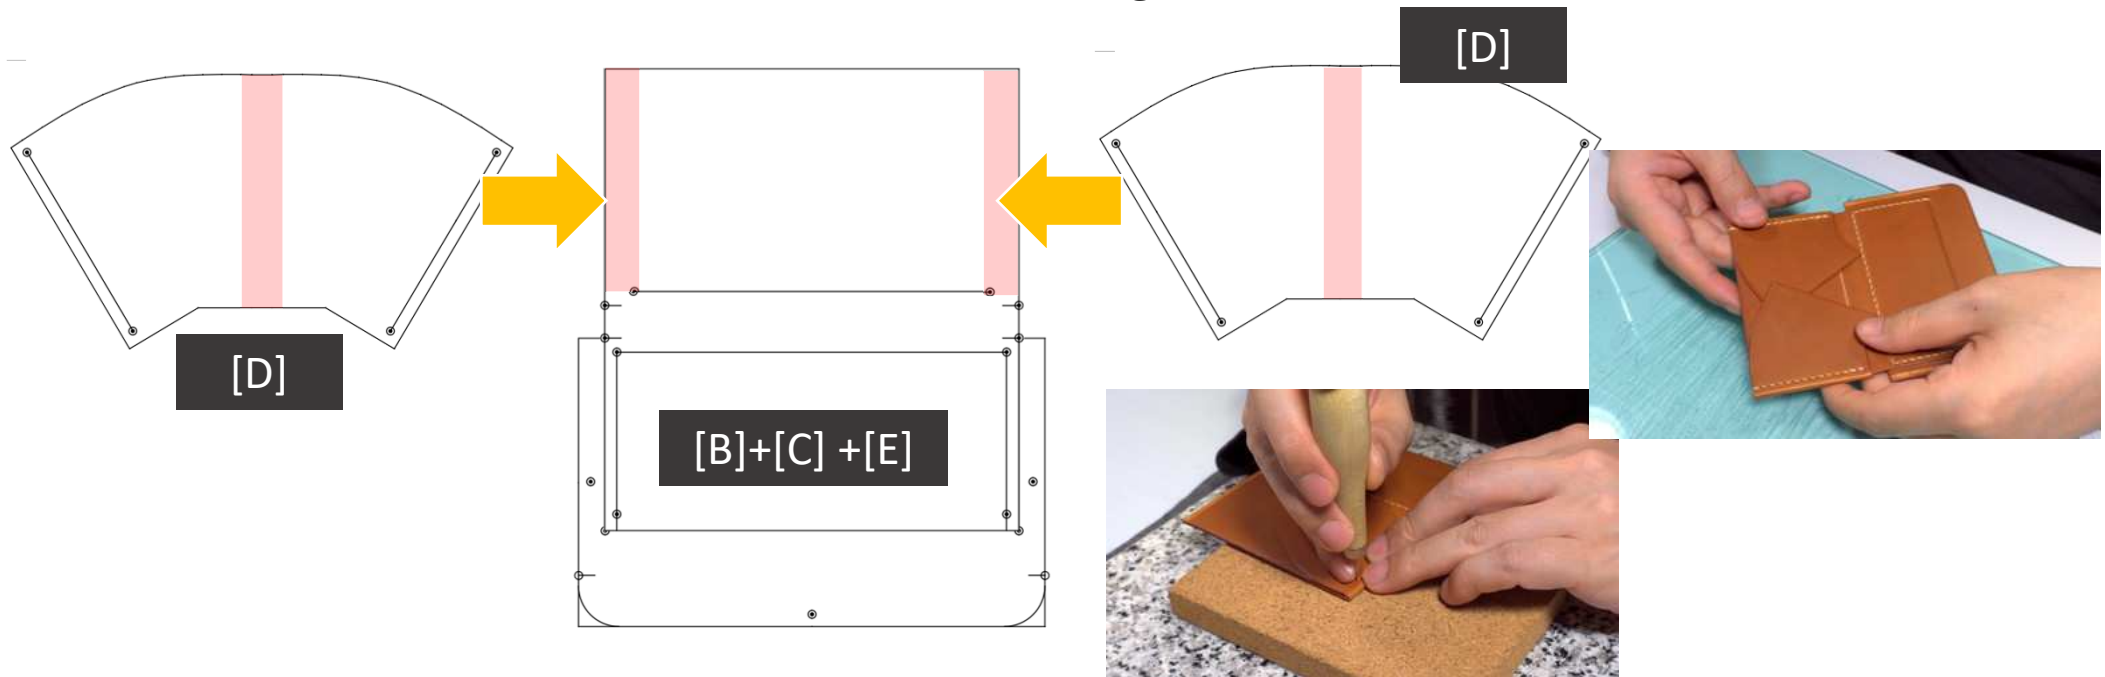


6-5: Paste the both side of [D] to [B] - Align the position using the stitching holes



7. Install the Zipper

- Mark on the zipper with “Zipper Ruler” and cut it to the required length
- Glue the zipper to the inner part along the [E](core material)

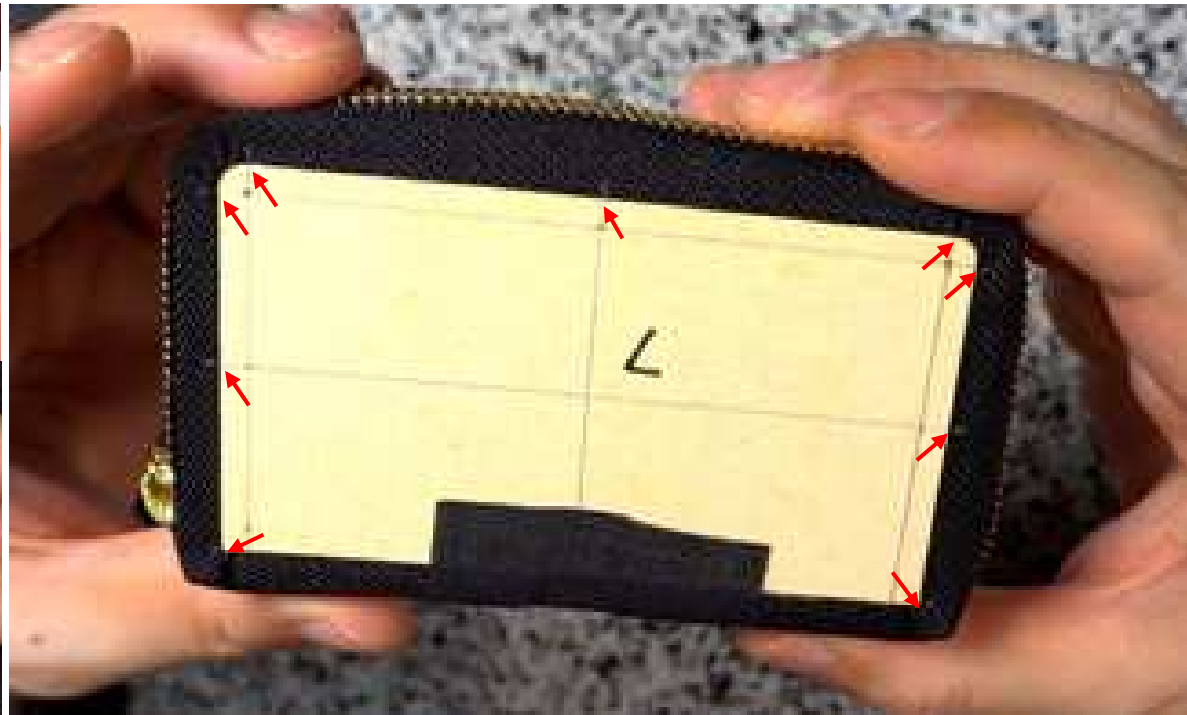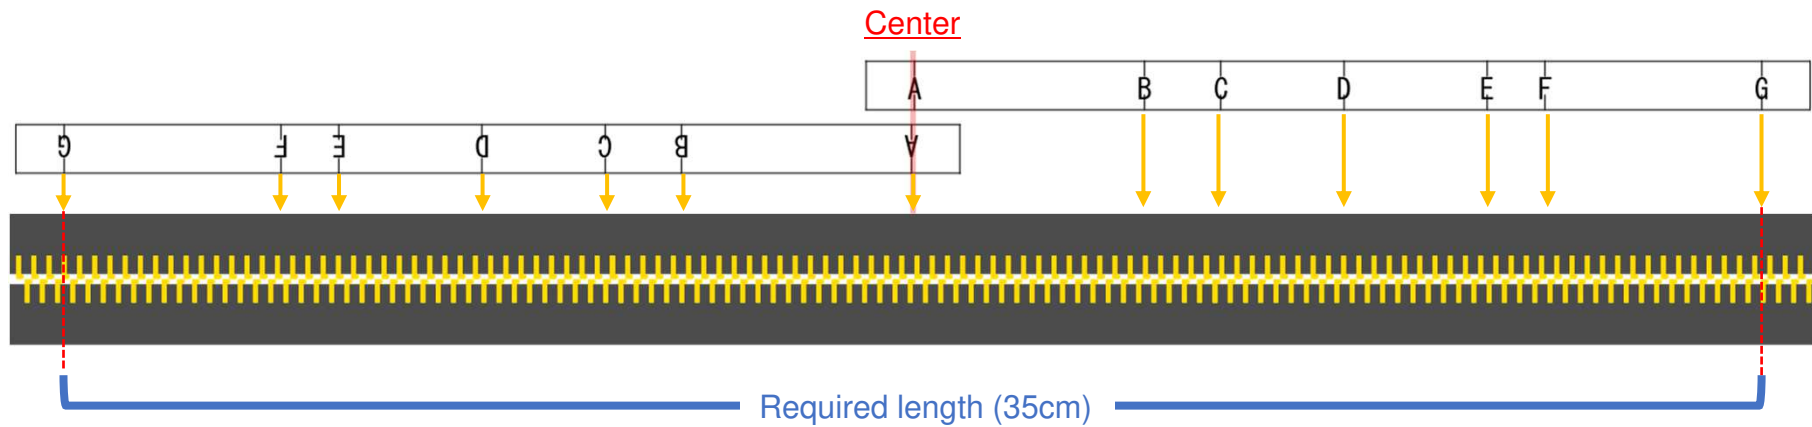

8. Sew the Outer

- Using the stitching holes, align the position.
- Attach the outer with double-side tape .

