



Port of Call Passport Wallet




These instructions are provided by "T. C. Hall Leather" with the attached PDF template. This template is for learning, practice, and personal use only. This pattern may **not** be used for sale.


See tchleather.com for FAQ and more products!


Materials needed:

- 2.5 ft² vegetable tanned leather (at or less than 2.5oz or 1mm thick)
- 2 sewing needles (we use John James #004)
- Thread: 4.5-5x length of stitch lines (we use Ritza Tiger Thread .6mm)
- A ruler or straight edge
- Thread snips/scissors
- X-Acto or leather knife
- Scratch awl (anything small and pointed will work here)
- Wing divider (recommended)
- Edge beveller (recommended)
- Pricking irons or stitching chisels (we use Sinabroks 3.85mm)
- Poly maul or hammer (NOT METAL)
- Lighter or Thread ZAP
- Glue (we use Seiwa leather glue)
- Burnishing agent (we use Seiwa Tokonole, but beeswax works)
- Creasing tool (optional)
- Sandpaper (recommended; we use 150, 220, 800 grit)
- Radius tool, corner punch, or coin (a coin really does work just fine)
- Edge slicker (recommended)
- Canvas cloth (optional)
- Glue spreader (or stiff scrap)
- Stitching pony (recommended)




Port of Call Passport Wallet

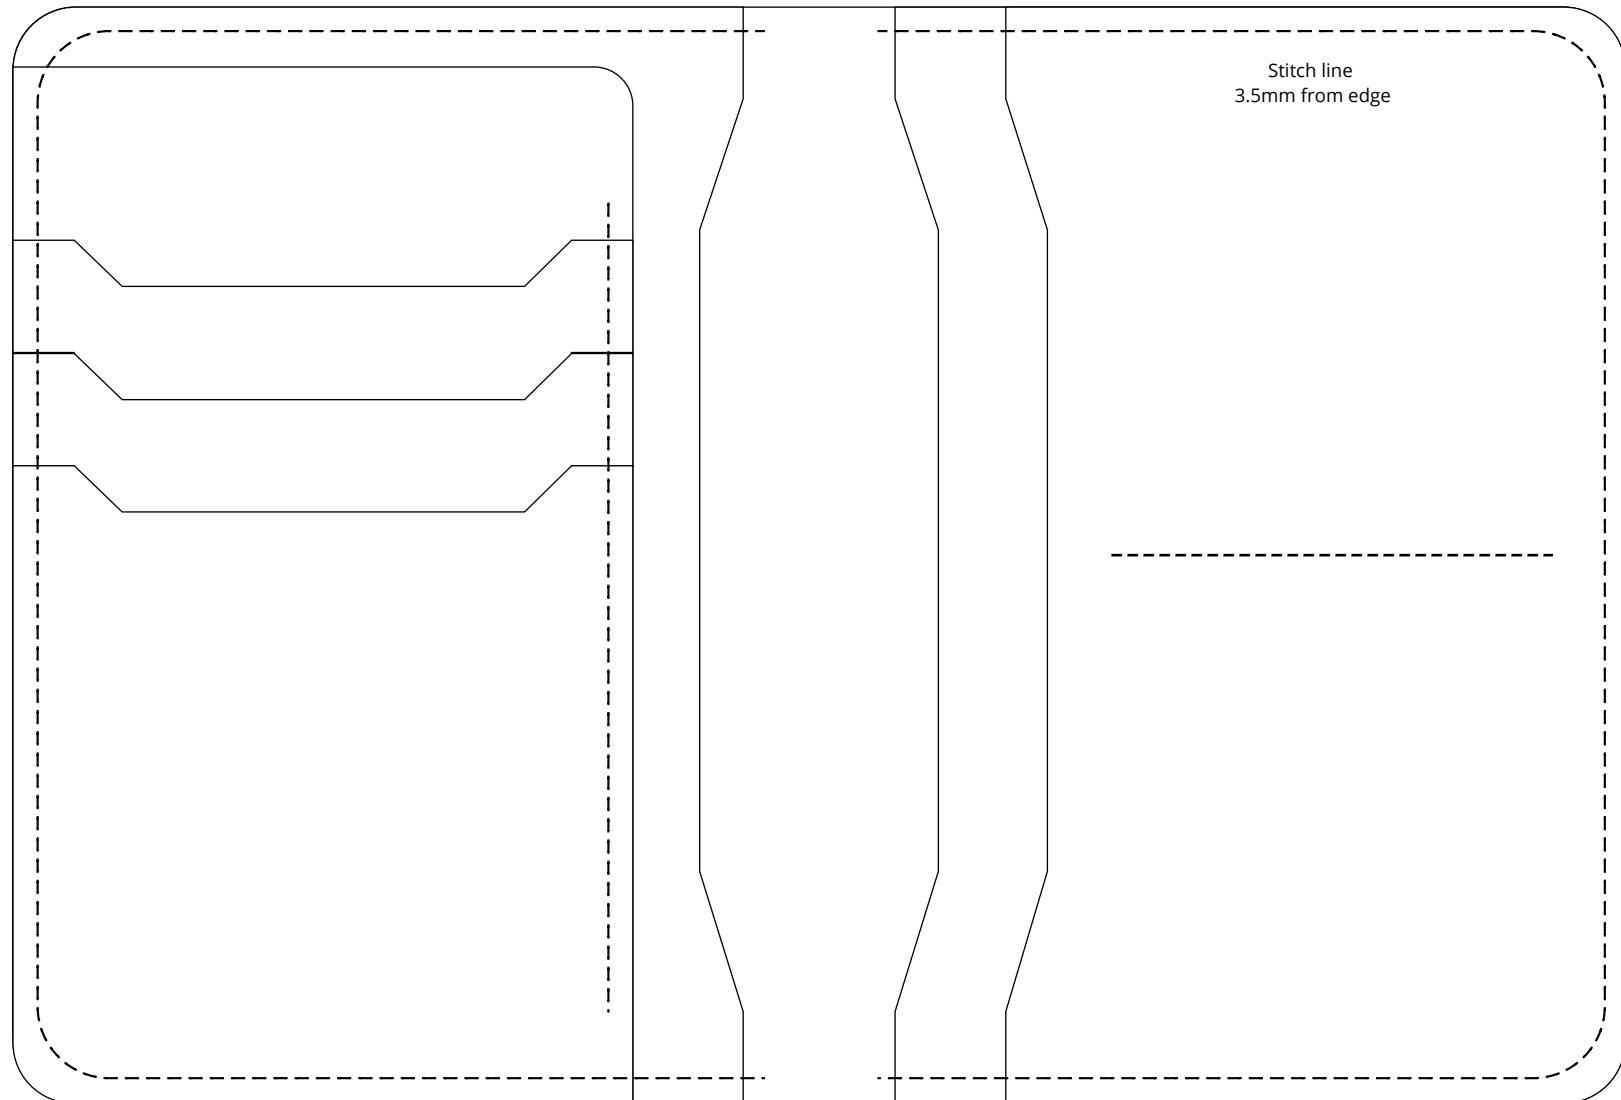





Port of Call Passport Wallet

2mm trim allowance	Port of Call Shell
21.33cm	14.5cm





Port of Call Passport Wallet

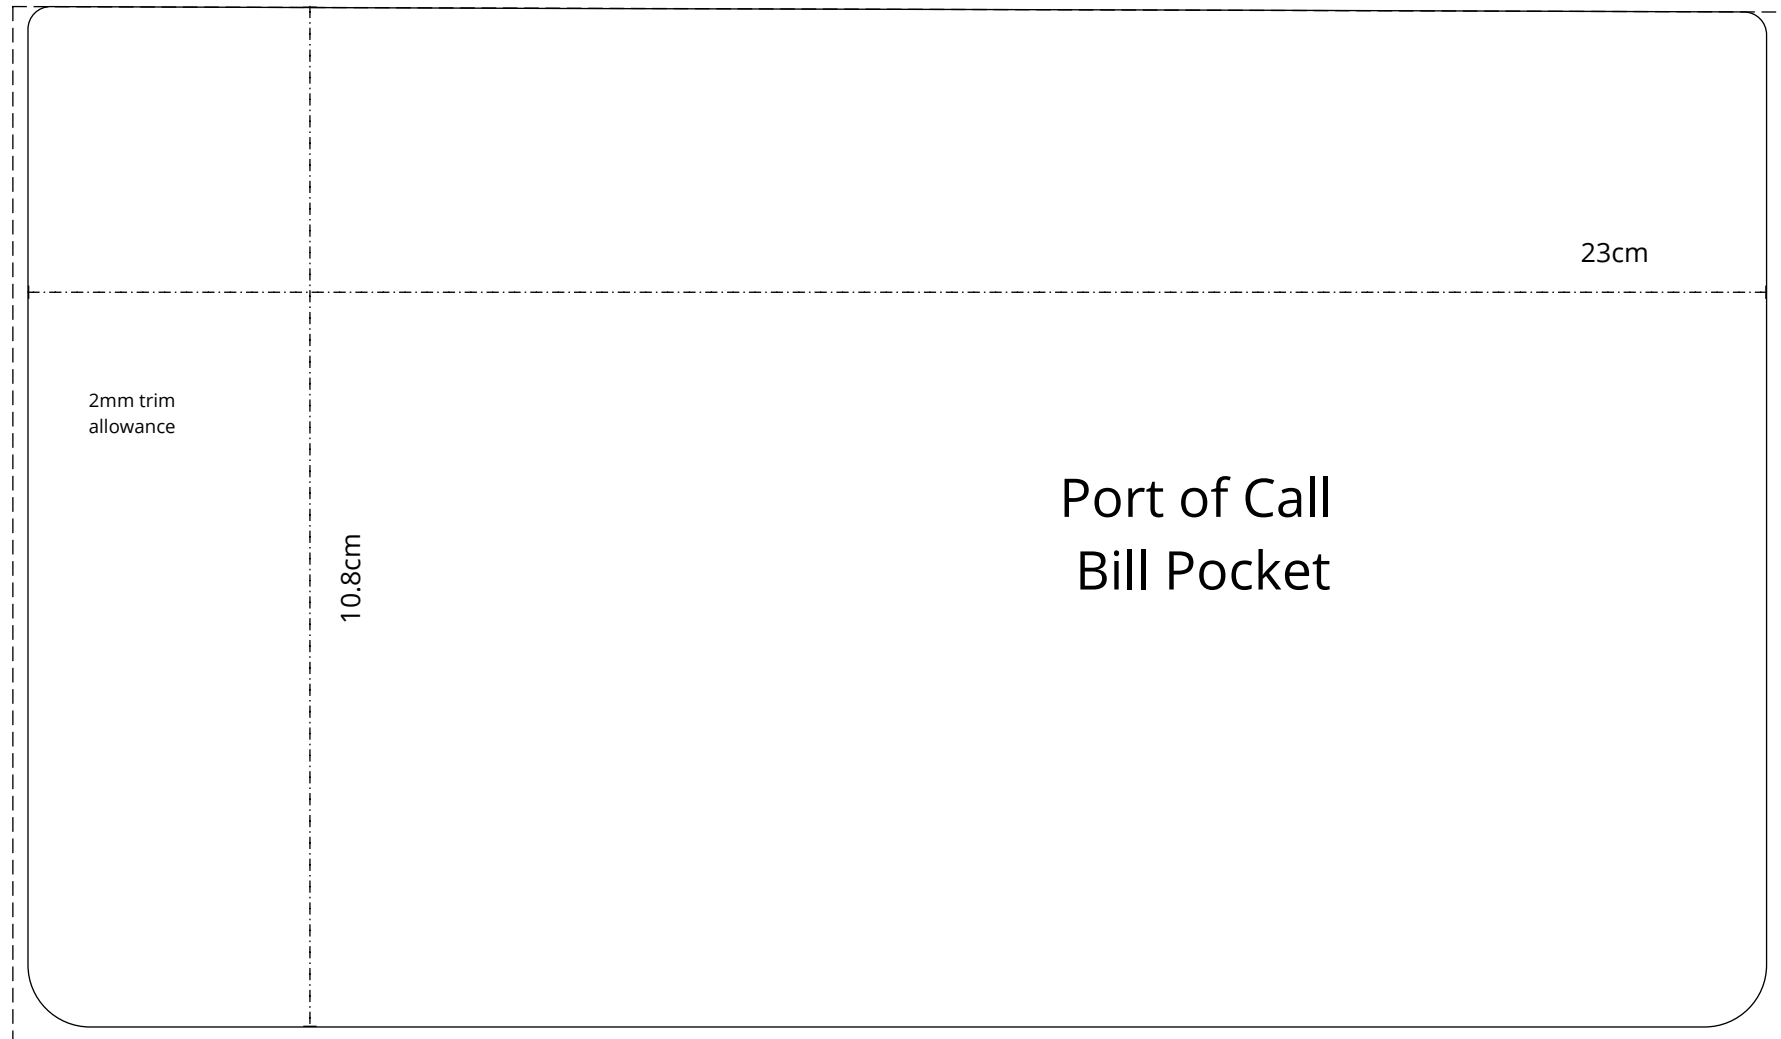



Port of Call Passport Wallet

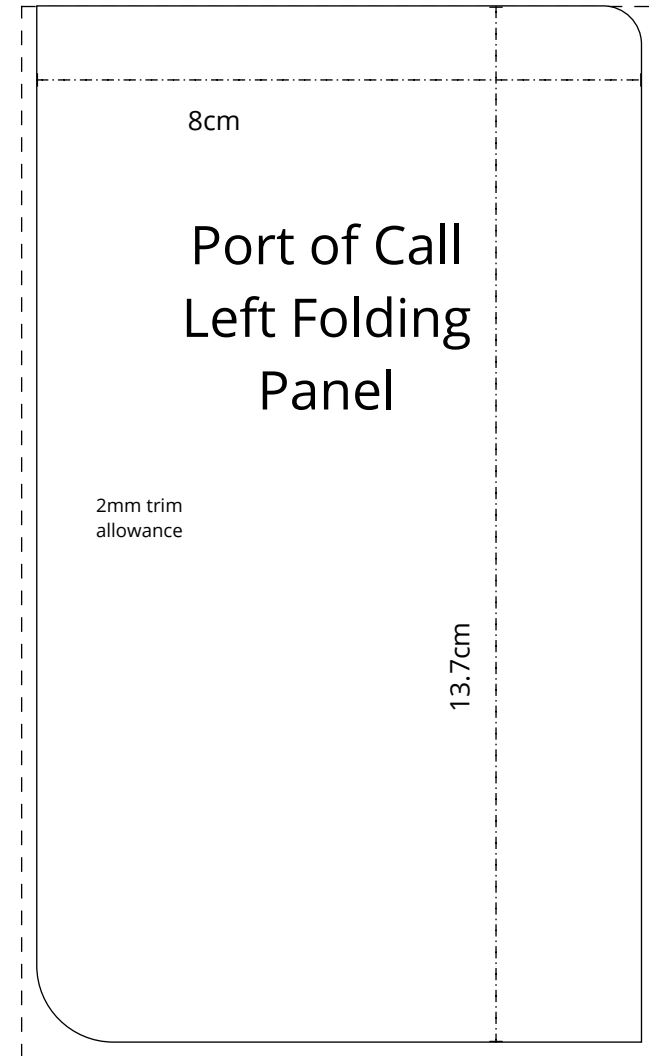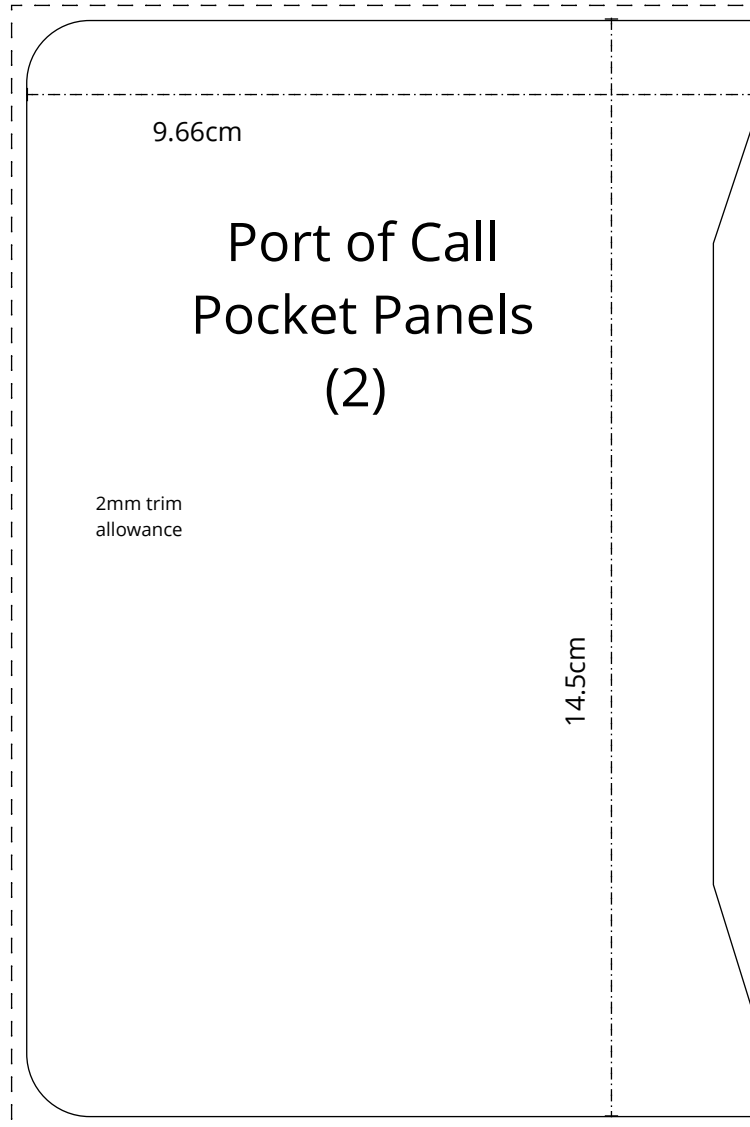



Port of Call Passport Wallet

1cm

1in

