



Toaster bag Instruction

Craftsman Gus

Material requirement:

Requirements:

- 2 D-ring (size: 2 cm.)
- 2 hooks
- 1 1/2 inch (3.8 cm) wide strap the length is up to your preference
- 2 zipper head
- 2 zipper pull
- No#5 zipper (2 pieces aprox. 35 cm./ 14 inches)
- 1.8 mm thickness veg. tanned leather and canvas lining is recommended
- texon or other type of stiffener, art paper or drawing paper can be substituted

See the YouTube link below for the making of this toaster bag:

<http://bit.ly/2DJG69B>

***NOTE: this is an instruction file only. Please refer to the file name "Pattern_Toasterpdf" for printing the pattern pieces




TOASTER BAG

Instruction


CraftsmanGus

1.

Skive to 1.0 mm. thickness in aprox 1 cm.

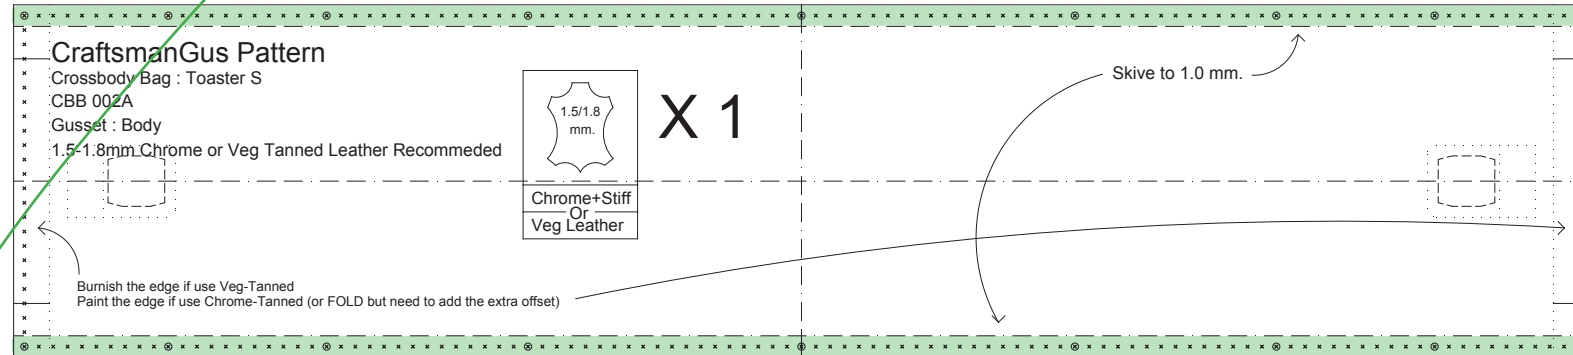

2.

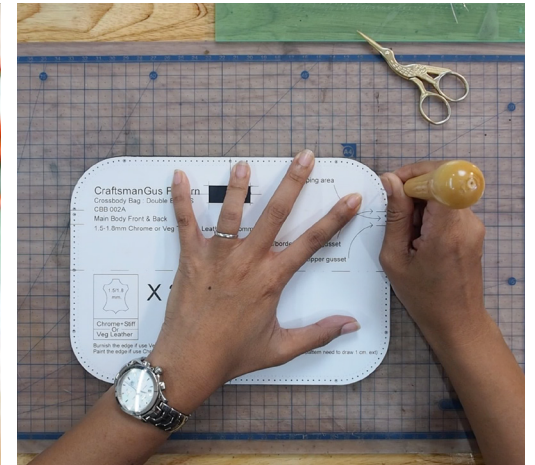

- 4 mm. diamond pricking irons is recommended for this project
- For separate punching method: use guide on the pattern to mark on the gusset and main body pieces to ensure that you have equal amount of holes




TOASTER BAG


Instruction

Craftsman Gus

3.

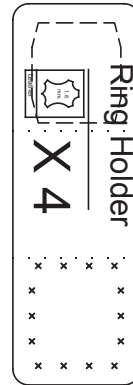

4.

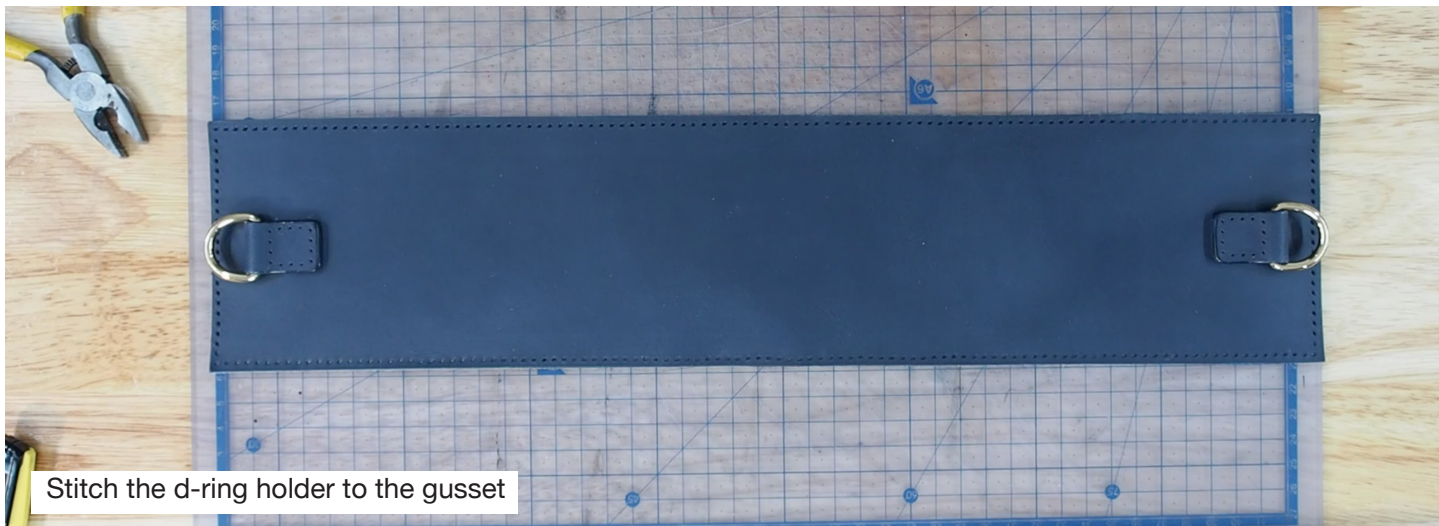



TOASTER BAG Instruction


CraftsmanGus

5.





Stitch the Main body front and back to the gusset

6.

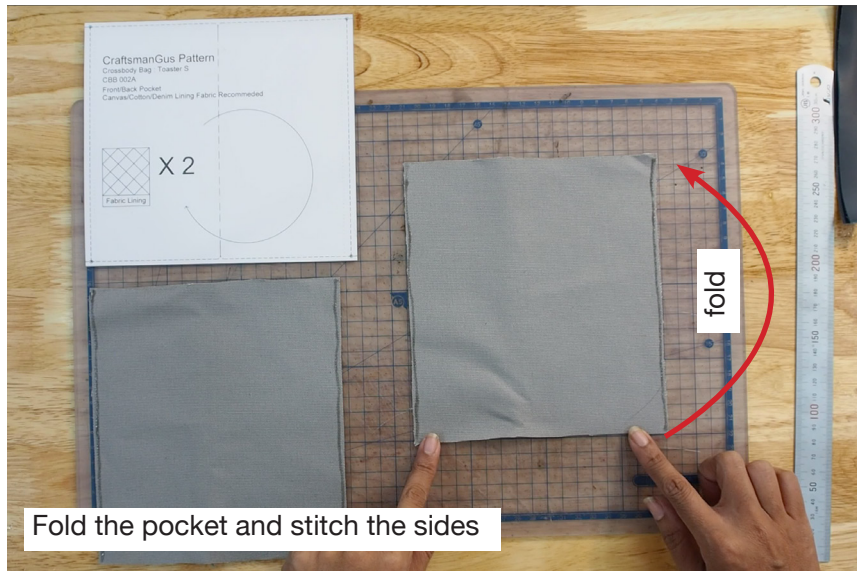

Fold the pocket and stitch the sides

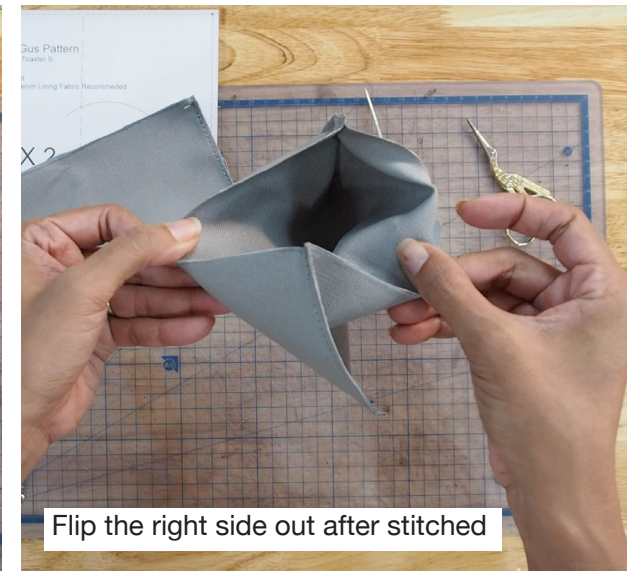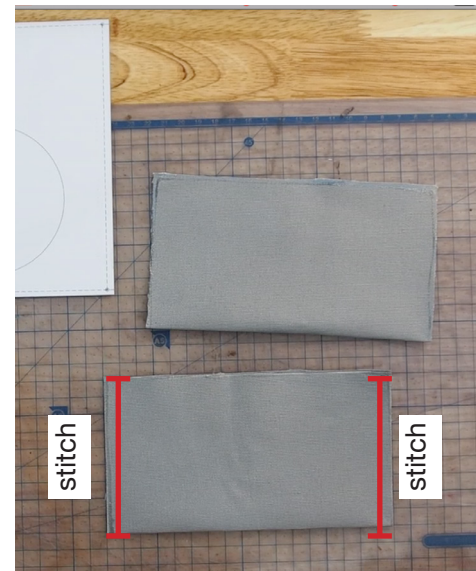





TOASTER BAG

Instruction


CraftsmanGus

7.

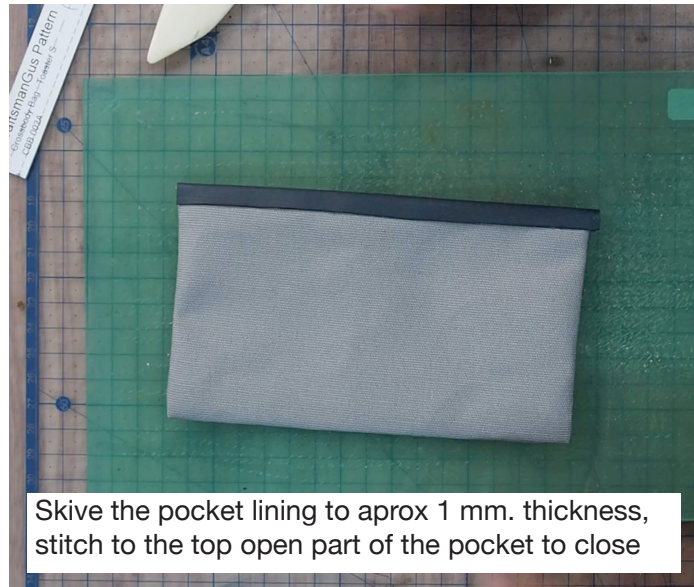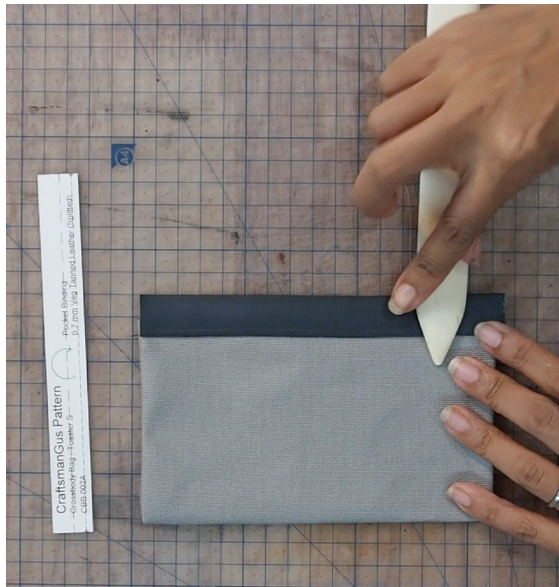


Skive the pocket lining to aprox 1 mm. thickness, stitch to the top open part of the pocket to close

8.

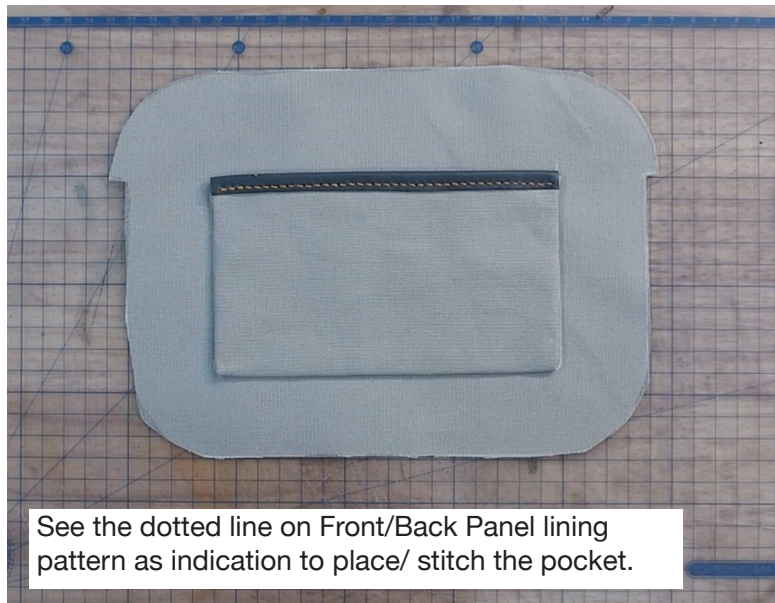

See the dotted line on Front/Back Panel lining pattern as indication to place/ stitch the pocket.

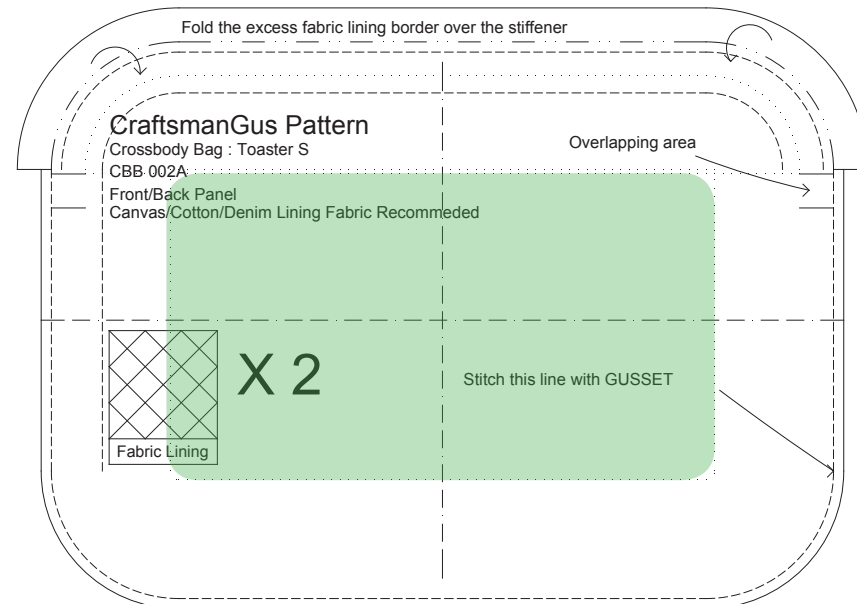




TOASTER BAG Instruction

CraftsmanGus

9.





Stitch the zipper to the top gusset lining

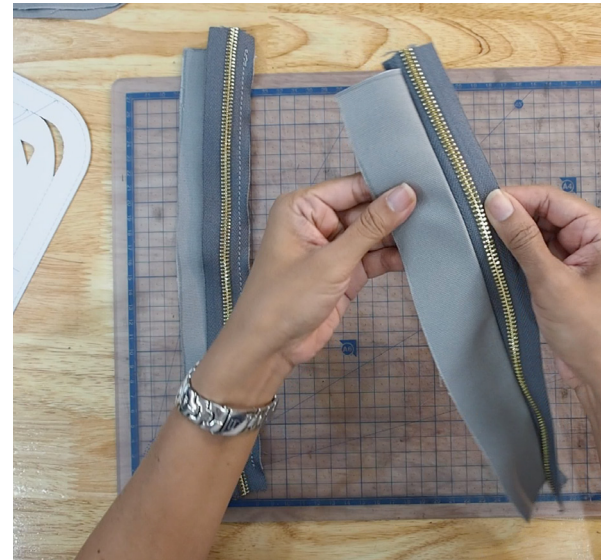

10.



Stitch the 2 pieces together see the dash line on the pattern as guide

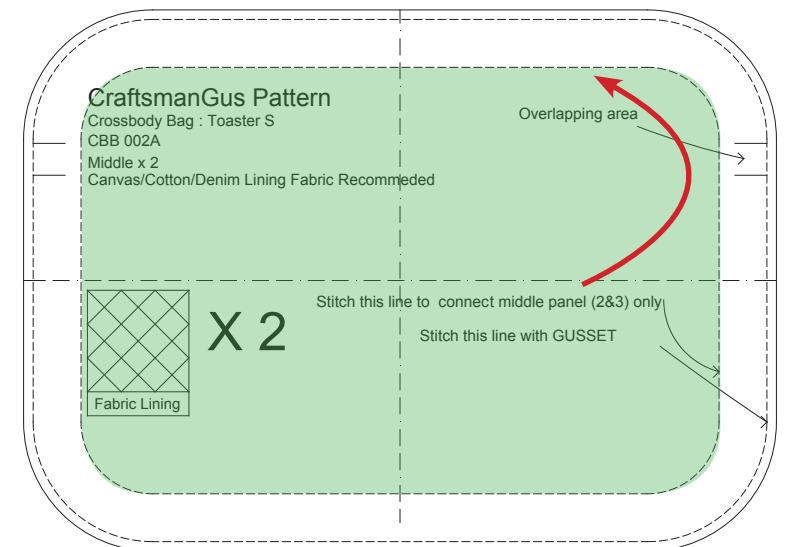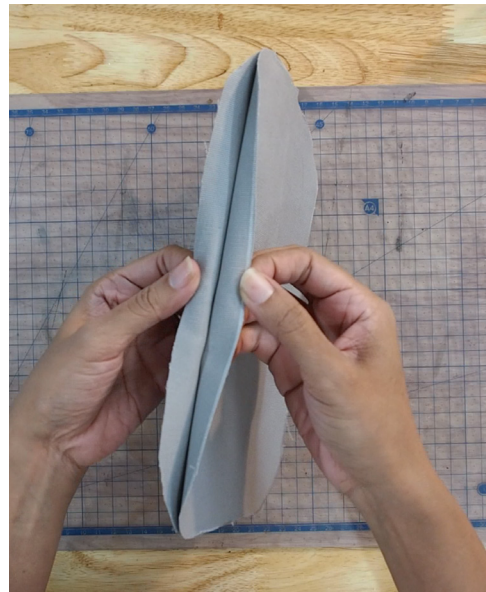




TOASTER BAG

Instruction


Craftsman Gus

11.

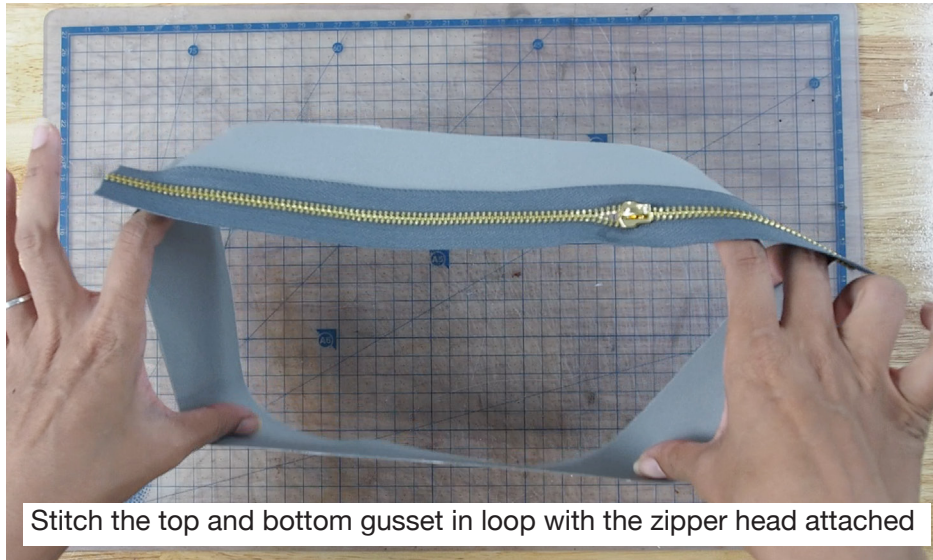

Stitch the top and bottom gusset in loop with the zipper head attached

12.

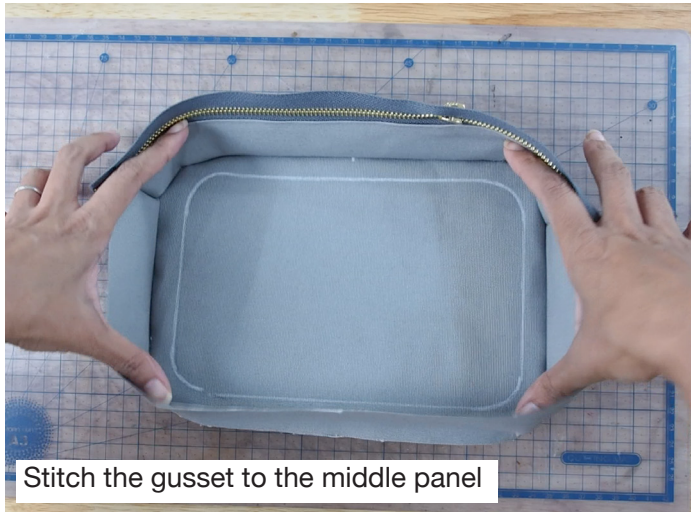

Stitch the gusset to the middle panel





TOASTER BAG

Instruction

Craftsman Gus

13.



14.



Glue the stiffener to the front and back panel
* this is the part where the pocket was sewn



Fold the fabric lining over the stiffener





TOASTER BAG


Instruction

CraftsmanGus

15.



Stitch the Front/Back Panel to the gusset leaving the top part unstitched

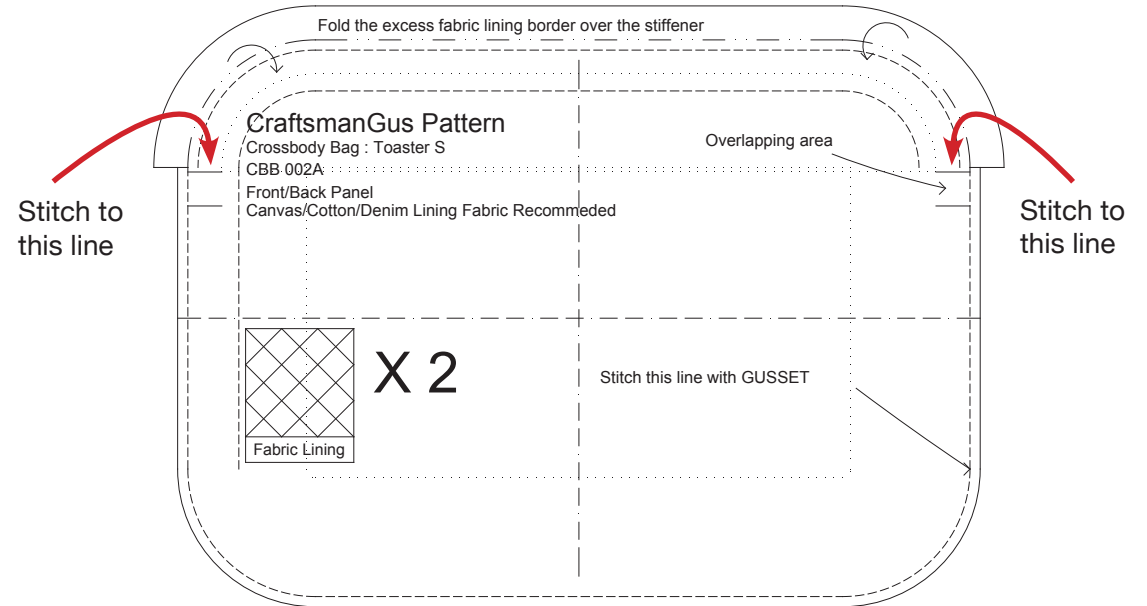

16.



Glue the zipper to the Front/Back Panel





TOASTER BAG

Instruction

Craftsman Gus

17.



18.






TOASTER BAG


Instruction

Craftsman Gus

19.

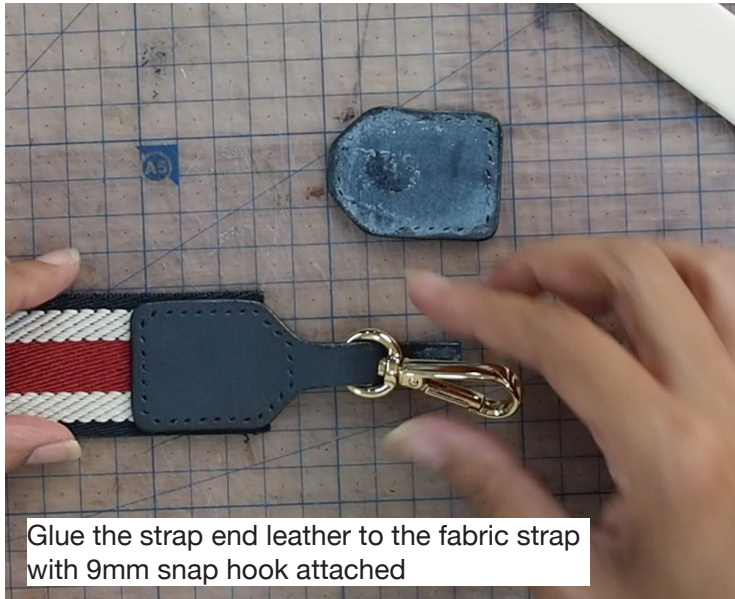

Glue the strap end leather to the fabric strap with 9mm snap hook attached

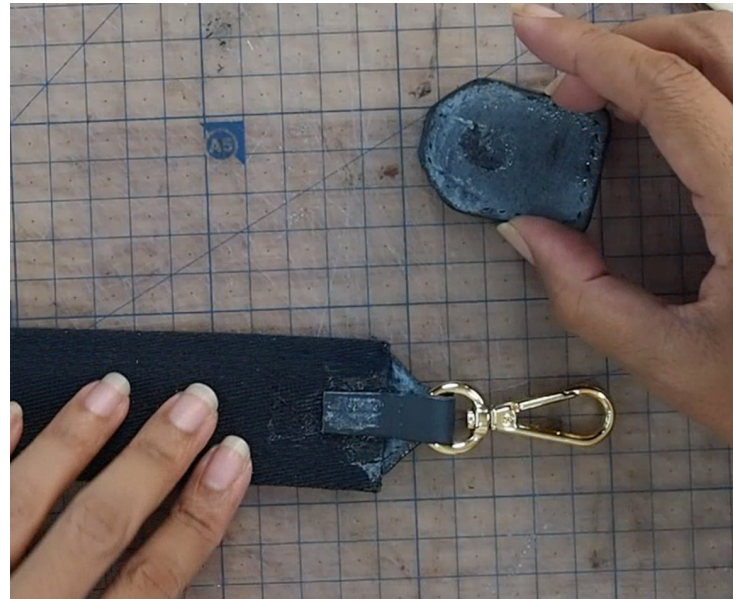

Stitch to complete

