
LEATHER BAG



Assembly instructions

Difficulty level:	advanced
Completion Time	12 - 18 hours

NECESSARY TOOLS

B&W Printer



Scissors or a cutter



Hole Puncher



Approx 16 square feet of leather



Thread and needles



7 x 20 mm Buckles and a few rivets

PRINTING THE PATTERN

Set up your printer to A4 paper and check “actual size” box.

Alternatively you can use “letter” format which is approximately the same size and will not impact the size of the product significantly

Print

Printer: HP LaserJet Pro MFP M125nw Advanced Help ?

Copies: 1 Print in grayscale (black and white)

Pages to Print

☒ All
☐ Current page
☐ Pages 1 - 11
More Options

Page Sizing & Handling ⓘ

SizePosterMultipleBooklet

☐ Fit
☒ Actual size
☐ Shrink oversized pages
Custom Scale: 100 %
☐ Choose paper source by PDF page size


Orientation:

☒ Auto portrait/landscape
☐ Portrait
☐ Landscape

Comments & Forms

Document and Markups Summarize Comments

Document: 8.3 x 11.7in
8.5 x 11 Inches

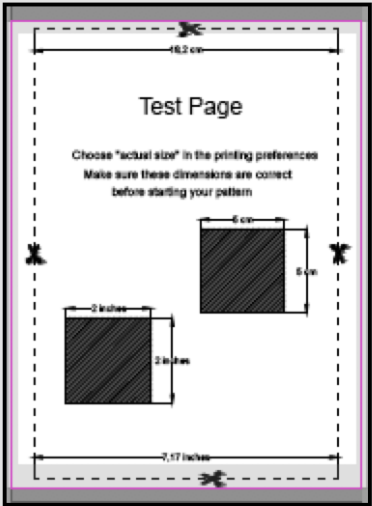

Test Page


Choose "actual size" in the printing preferences
Make sure these dimensions are correct
before starting your pattern

Dimensions shown: 48.2 cm, 2 inches, 2.125 inches, 6 cm, 5 cm, 7.17 inches

< Page 1 of 11 >

Cancel Print

Once you have printed and cut your leather you should have all the pieces shown in the picture below:

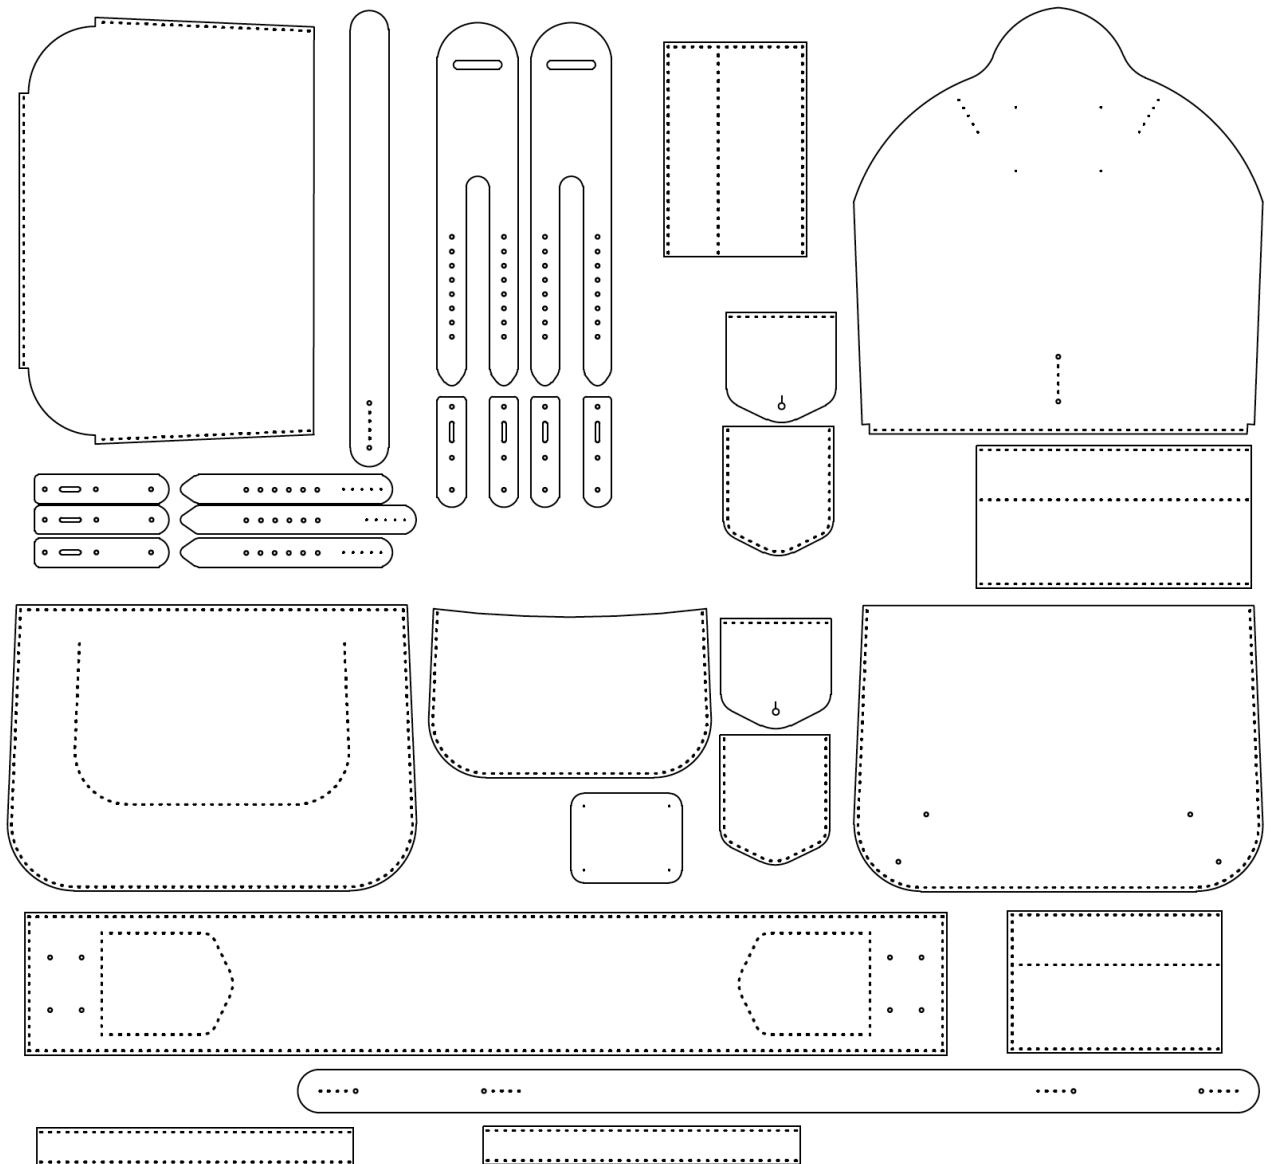

In order to help with your build, we filmed the entire process from the start to finish.
Please access your instructional video here:

www.youtube.com/watch?v=YpZN9Ts5Y3o

Would love to see what you did, so please share or leave a review on Etsy.

Stuck and need help? go ahead and send us a message, someone is always around to give you a hand

Thank you for constructing your bag with our patterns

To further help all our clients we created this FaceBook group for everyone to share ideas and stay up to date with the latest patterns available.

Please follow the link below to join.

<https://www.facebook.com/groups/1434028716724087/>

Best Regards

Tony