



Instruction


Step 1: Sew A07 and A09 on A05, only sew the short stitching lines.

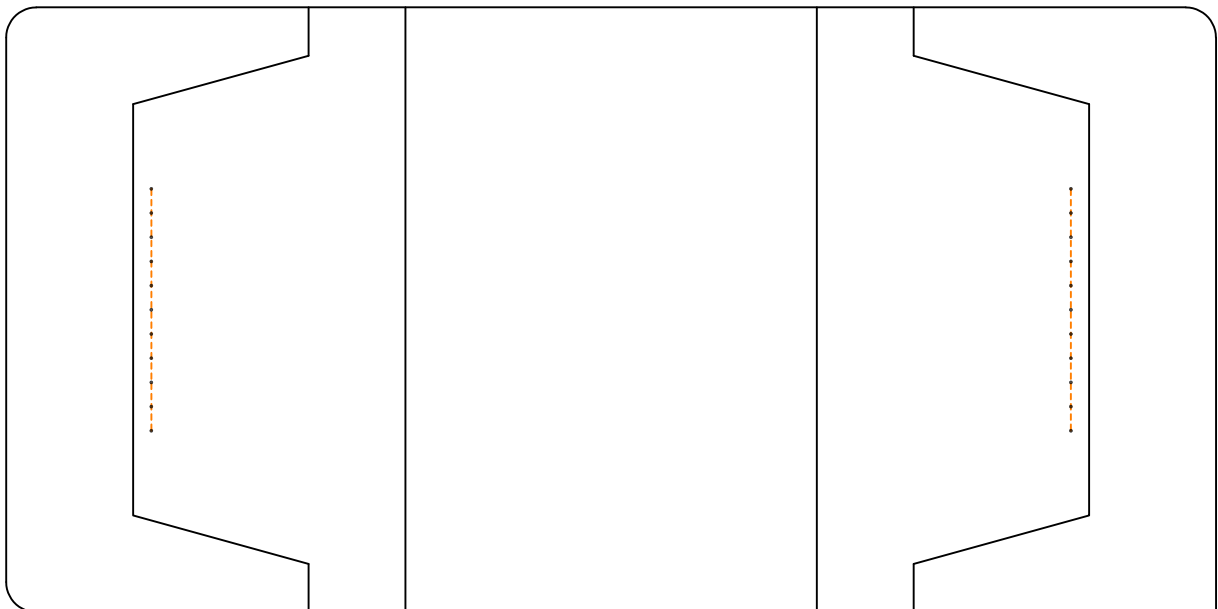

Step 2: Glue A06 and A09 on A05, only glue edges, and sew the stitching line as sketch shows.

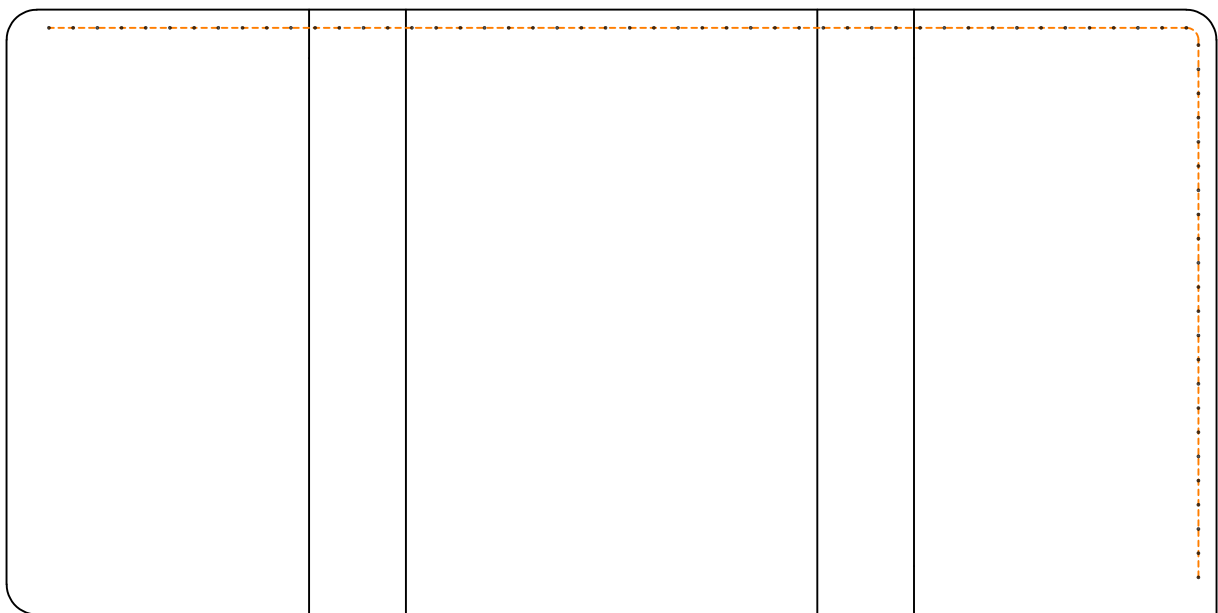


Step 3: Glue one side of A04 on A03's flesh side, and then glue the other side of A04 on A01's grain side.

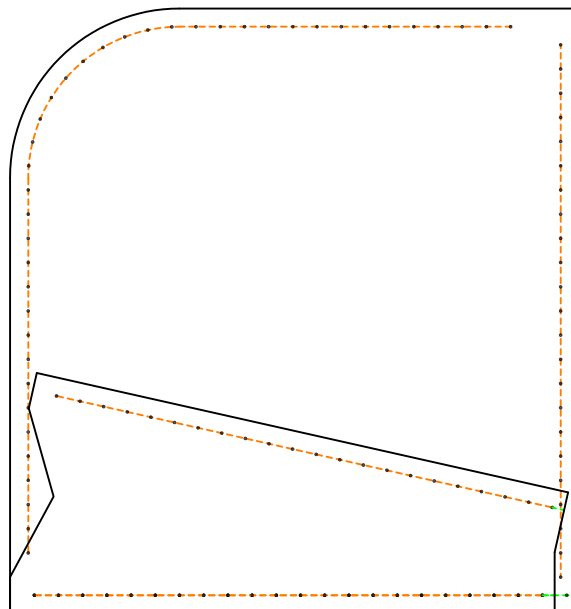

Step 4: Shoot male snap on A02 And sew A02 on A01's flesh side. Shoot female snap on A01.




Step 5: Now we sew step 2's combination on A01's flesh side, only sew the "L" shape stitching line.

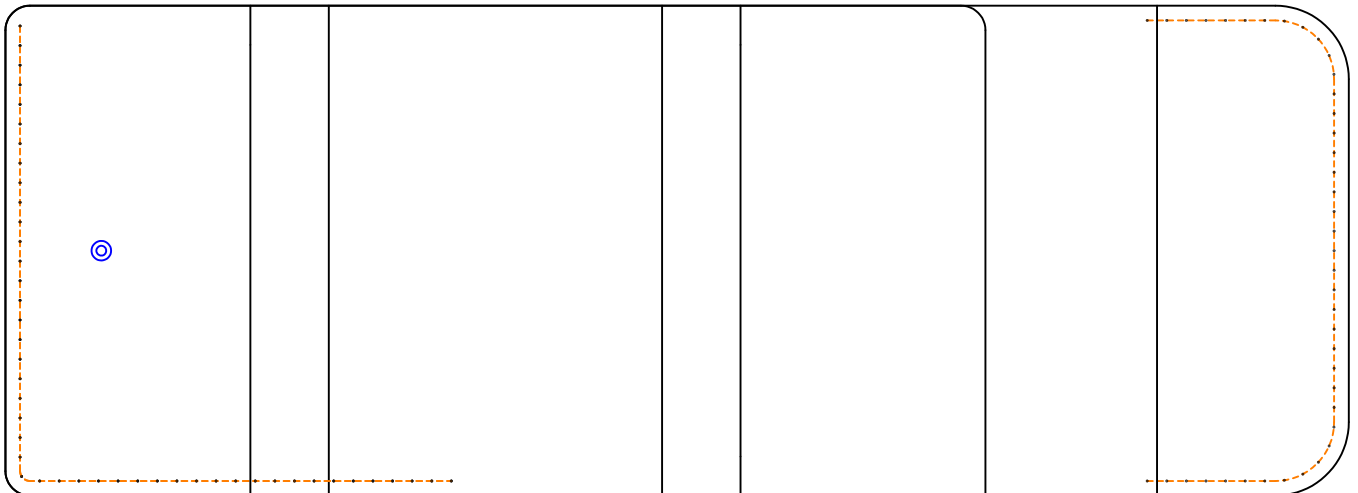

Step 6: Key step: Pull Step 2's combination to force A01 bend naturally, and then glue it on the shadow area.

Now we begin sewing, begin from green stitching line, first 2 stitching get through A01 and A03, please DO notice that, after 2 stitching, then the stitching line was departed to 2 different direction, one to sew one side of A04 on A01, and the other side of A04 was sewn with A03 by a new sewing.

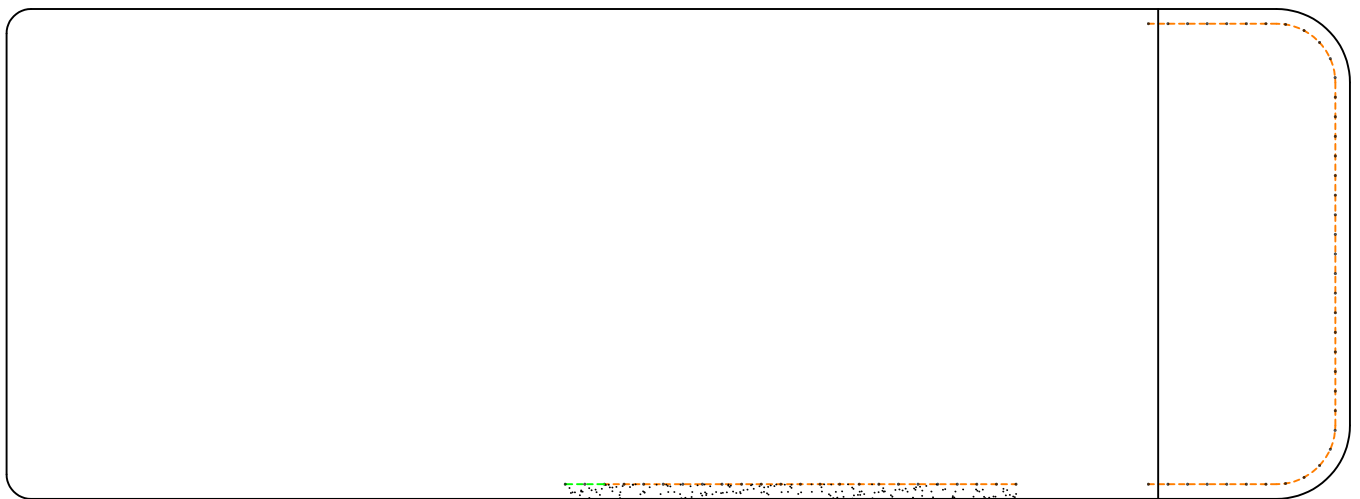

Step 7: Sew zipper on A03 and A01 to finish this work.

Notice:

1, You can burnish edges for aesthetic if you use vegetable tanned leather and use edge paint for aesthetic if you use chrome tanned leather;

2, Thin the edge before sewing is always advised;

3, 1oz=0.4mm;

4, Here is the line instruction.

Note

	Cutting line
	Folding line Orienting line
	Stitching line
	Center line