

Stitching Glovelettes



FAQs

Q: Can I sell what I make from these patterns?

A: *Of course you can! In fact, we encourage it!*

Q: Can I sell my copy of the pattern?

A: *No you can't. You can't reproduce the pattern in any media, be it digital or physical, to **sell** without written permission from us. You **CAN** print one (1) copy at a time for your personal use.*

Q: I don't have a printer. How can I print my pattern?

A: *You can take it your local office supply or print shop. They will print for a small fee per page. The print shop may ask if you are authorized to print from this file. You are allowed to print one (1) copy for your personal use.*

Q: I'm not in the US, and the paper used here is a different size. How will this affect the pattern when I print it out?

A: *We have allowed a generous overlap on the patterns pieces that require more than one sheet to create a full size pattern. There may be occasions that the pattern will print outside the width of a sheet of A4 paper. If you look at the pattern piece on the screen, and it goes from edge to edge width-wise, cut a strip of paper 2" (roughly 5 cm) wide, and either glue or tape it to the edge of the A4 paper, overlapping it a bit, to make it 8.5" (21.59 cm) wide. Length is not an issue, as A4 paper is longer than the standard 8.5 X 11" paper used in the States.*

Q: I am having a problem and need clarification. Can I contact you for assistance?

A: *Of course! We answer all e-mails within 24 hours, usually a whole lot sooner! You can reach us at "theleatherpatternstore@yahoo.com". Use 'HELP' as the subject, and we'll get right back to you!*

Enjoy!

Mitz & Keith



Printer: HP Officejet 7610 series (Network)

Properties

Advanced

Help ?

Copies: 1

☐ Print in grayscale (black and white)

Pages to Print

☐ All
 ☒ Current page

Pages 2

More Options

Page Sizing & Handling

Size

Poster

Multiple

Booklet

☐ Fit
 ☒ Actual size
 ☐ Shrink oversized pages

Custom Scale: 100 %

☐ Choose paper source by PDF page size

☐ Print on both sides of paper

Orientation:

☒ Auto portrait/landscape
 ☐ Portrait
 ☐ Landscape

Comments & Forms

Document and Markups

Summarize Comments

Document: 8.5 x 11.0in

8.5 x 11 Inches

Assembly

Sew one "flap" flap to the front cover, and one to the back cover, with the long side (with the 1/4" holes) facing out, using a saddle stitch.

With front cover grain side up, insert Chicago screw shaft in front cover "flap" flap with the head of the screw on the inside and the open end of the shaft facing up.

Cut and trim paper (see patterns for paper dimensions)

Punch out holes with paper punch

Add paper until even with the corner shaft opening

With back cover flap side up, lay it on top of the front cover (covers will be facing grain side to grain side), lay the back cover "flap" flap over the screw shafts and insert the Chicago screw. Tighten

Flip both pieces over and close


Page 1 of 1 (2)

Print

Cancel

To print your patterns using ADOBE READER XI™, make sure the 'actual size' box is marked

alternate construction method

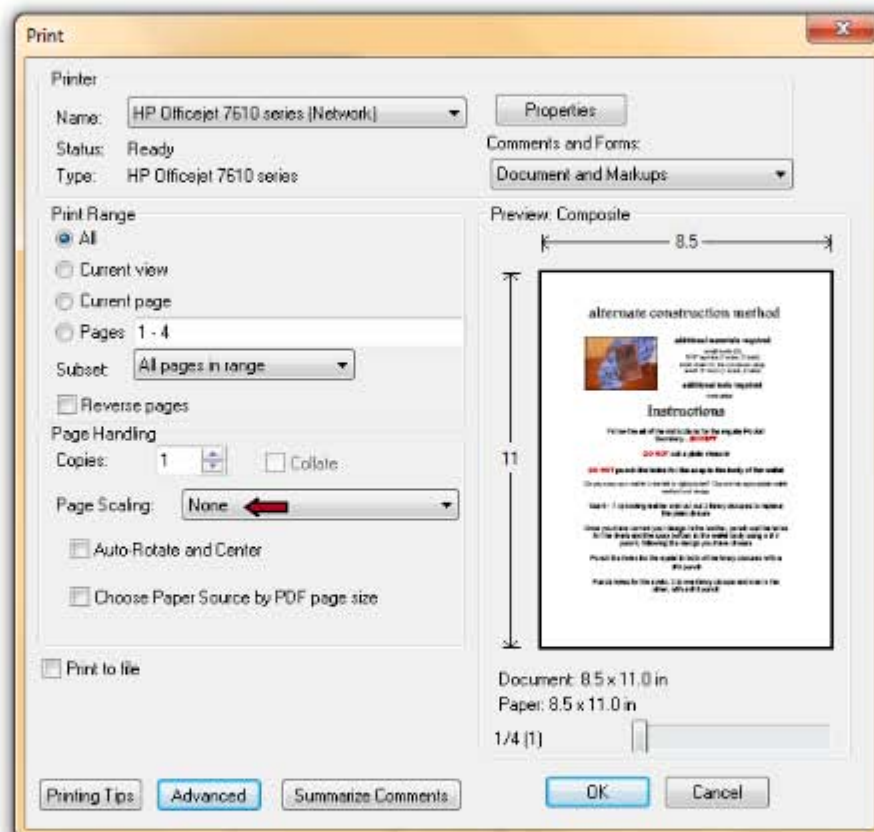

To print using earlier versions of ADOBE READER™, make sure you select 'NONE' on the drop down menu for 'PAGE SCALING'

Punch the holes for the eyelet in both of the fancy closures with a # 6 punch

Punch holes for the rivets, 2 in one fancy closure and one in the other, with a # 3 punch

Stitching Glovelettes



Materials List

glove leather (preferred) or deerskin*
waxed thread
glove snap(s), velcro (**NOT sticky back**) or your preferred closure

Tools Required

stitching needle
snap setter (if using glove snaps)
diamond punch (3mm)
3 punch

***Note* - You can use deerskin, but it stretches the more you use it. So if you do use deerskin, then velcro for the closure is highly recommended**

***Note* - Any re-sizing for the stitching glovelette should be done prior to cutting the leather**

Instructions

Cut glovelettes out of soft leather of your choice

Punch all of the stitching holes for the pinkie finger sleeve with the diamond punch

Assembly

Overlap pinkie sleeve and match up the stitching holes

Stitch down one set of holes and then back up the same set with a running stitch. Tie off at the end of each row

Repeat for the other set of holes

Put pinkie finger sleeve on pinkie finger. Wrap around your wrist and mark for snap(s) on the adjustment straps

Skip these next 2 steps if using velcro

Punch holes for snaps with a # 3 punch

Insert snap(s) in leather and set


Using Velcro

Put pinkie finger sleeve on pinkie finger. Wrap around your wrist and mark for stitching lines

Velcro does not have to be sized prior to stitching on. Cut to the required shape and length and stitch to your mark

Punch stitching holes with the diamond punch in the size and shape of the hook & loop velcro pieces that you are using in the adjustment straps of the glovelettes

Using a running stitch, stitch one piece of the velcro to the grain side of the bottom strap, and the corresponding piece to the flesh side of the top adjustment strap

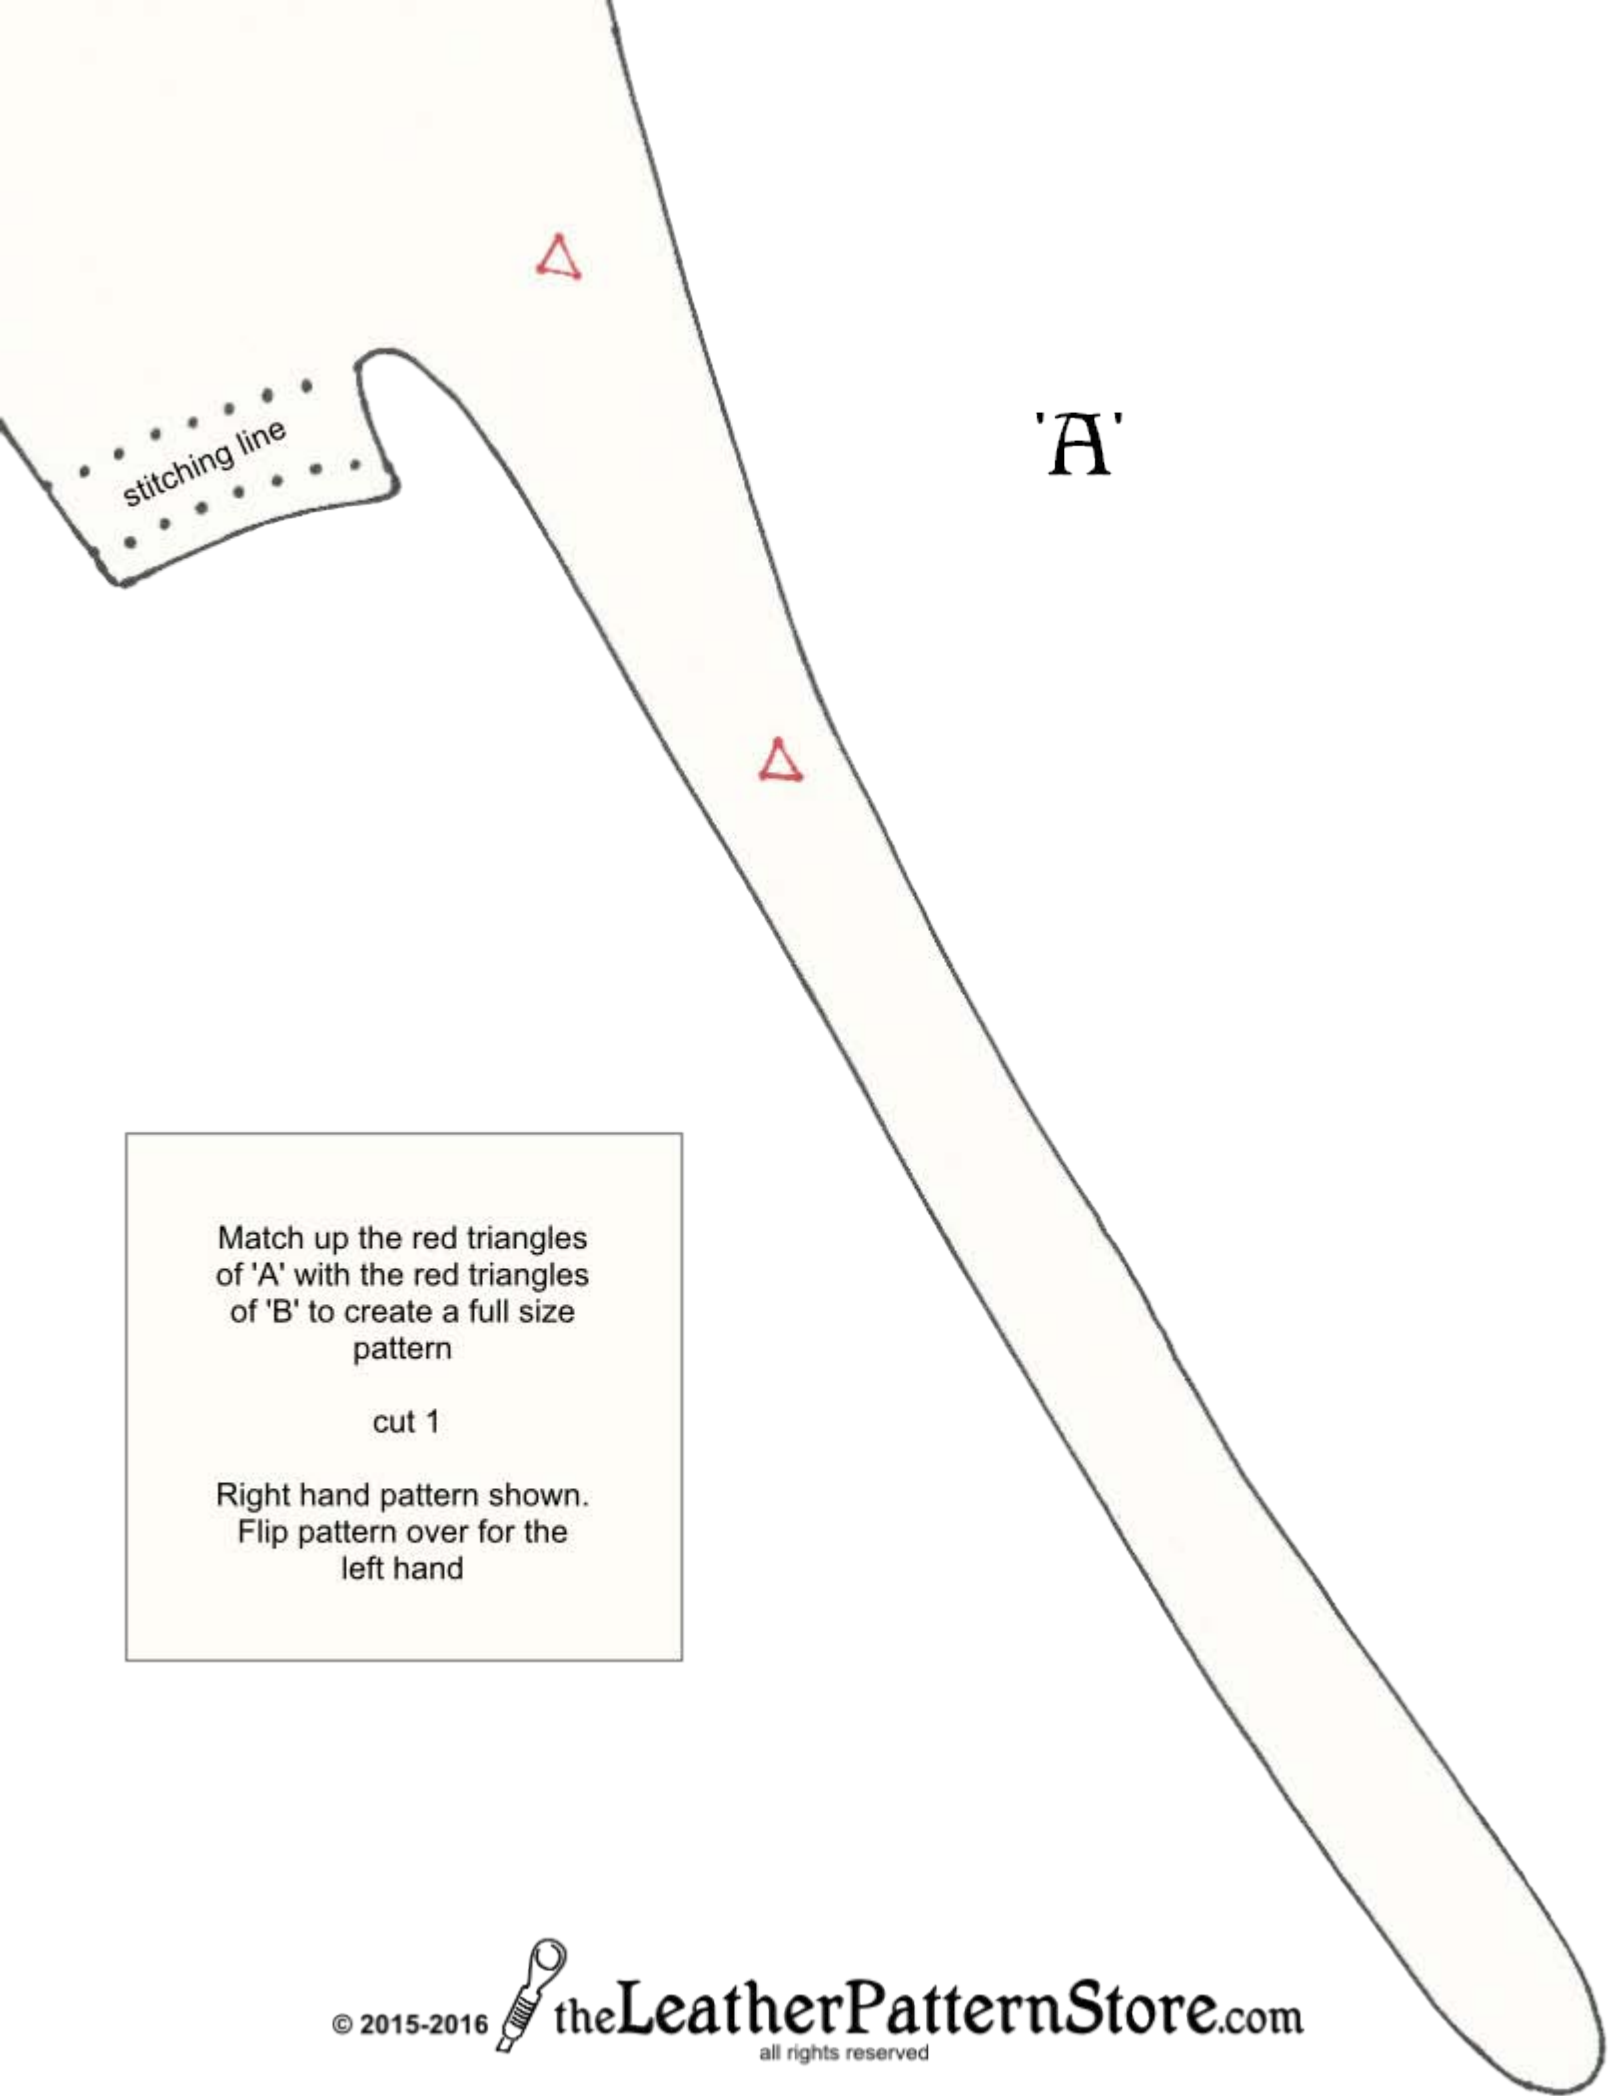

'A'

Match up the red triangles
of 'A' with the red triangles
of 'B' to create a full size
pattern

cut 1

Right hand pattern shown.
Flip pattern over for the
left hand

'B'



stitching line

stitching line

Match up the red triangles
of 'A' with the red triangles
of 'B' to create a full size
pattern

cut 1

Right hand pattern shown.
Flip pattern over for the
left hand

snap
(optional)